


PRISM **JET 54**

# OPERATION MANUAL

Full-Color Inkjet Printer

PRN-M-54GEN2

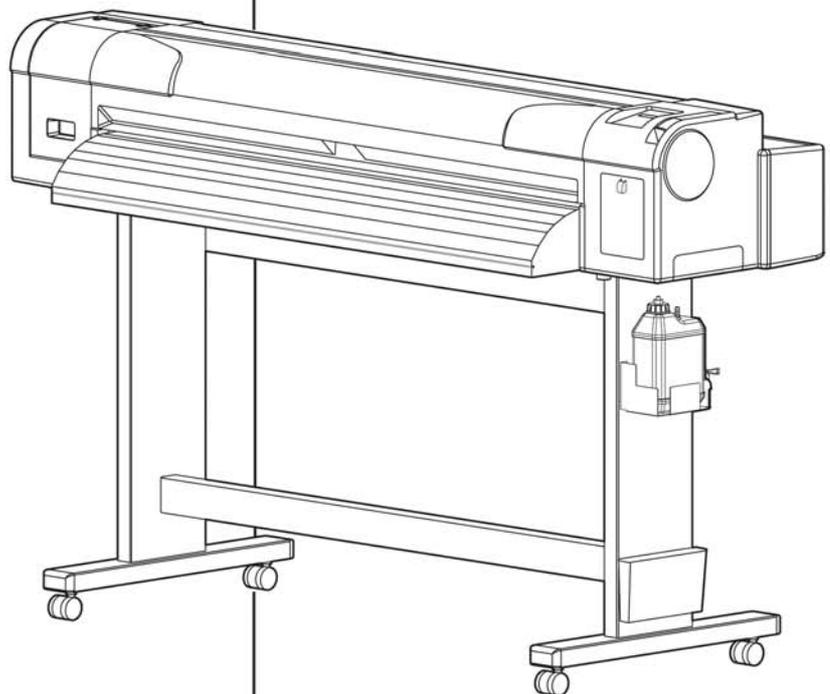

Read This Manual Before Using The  
Printer.

Rev.

PRN-M-54GEN2-A-00

PRN-M-54GEN2

OPERATION MANUAL



# 1 Safety instructions

This chapter explains warning terms, safety precautions and warning labels on the product that operators and people who install this product need to know.



- **When installing and operating this printer, be sure to follow the directions and warnings in this book.**
-

## 1.1 Types and meanings of warnings

The warnings in the Operation Manual and the warning labels attached to the printer are categorized into three stages.

Understand the meanings of the following warning terms and follow the contents (instructions) in this manual.

Warning	Meaning
 <b>WARNING</b>	Used for dangerous situations where death or serious injury may be caused.
 <b>CAUTION</b>	Used for dangerous situations that may cause slight or medium injury, or when all or parts of products are damaged.
<b>NOTE</b>	Used for special cautions and for information that needs to be emphasized.

## 1.2 Important safety instructions

This section explains general cautions that must be followed in order to use this printer safely.

### **WARNING**

-  Do not install this printer in the following places.  
It may cause an injury if the printer falls down.
  - On a shaky stand
  - Slanting location
  - Places where vibration of other machines etc. is transmitted
-  Do not step on this printer or place heavy things on top of it.  
It may cause an injury if the printer falls down.
-  Do not block the vent on the product with cloth or other material.  
If you cover the vent, the product interior may get hot and cause a fire.
-  Do not install the printer where it is humid or dusty.  
It could lead to an electric shock and fire.
-  Do not use a damaged power cable.  
It could lead to an electric shock and fire.
-  Do not pull out or insert the power plug with a wet hand.  
This could lead to an electric shock.
-  Do not connect an earth wire to the following places.
  - Gas pipes  
There is a possibility of ignition and explosion.
  - Earth wire of telephone cables and lightning rods  
Heavy current might flow whenever lightning strikes.
  - Water pipe and faucet  
The earth might not work if a plastic pipe is connected in the middle of the metal pipe.
-  Do not insert or drop metal or flammable objects into the printer through openings such as a vent.  
It could lead to an electric shock or fire.
-  Do not spill flammable liquid on the platen.  
This could lead to a fire.
-  Do not place any combustible materials on the platen while the heater is working.  
There may be a risk of fire.
-  If foreign substances or liquids such as water entered the printer, do not use the printer as it is.  
It could lead to an electric shock or fire.  
Immediately turn OFF the power switch, disconnect the power plug from the electric socket, and contact SIGNWarehouse Product Support or your PrismJET Dealer.
-  Wire the various cords as directed in the Operation Manual.  
Mistaken wiring could cause fire.
-  Be sure to use the specified power cable.  
Using power cables other than the specified can cause an electric shock or fire.



Make sure to use only the specified power supply (AC 100 V to 120 V or AC 200 V to 240 V).  
If a power supply other than the specified voltage is used, it could cause an electric shock and fire.



Take power for the printer directly from the power socket (AC 100 V to 120 V or AC 200 V to 240 V).  
Do not use multiple plugs on the same socket. This could generate heat and might cause fire.



Be sure to use a dedicated power socket with earth wire for the power supply, and connect it to the earth wire.  
If the earth wire is not connected, an electric shock or fire may occur.



The waste fluid from the printer falls under the category of waste oil (waste ink) of industrial waste (out of the 19 items of general waste from business activities). You are obligated to properly dispose of waste fluid in compliance with Wastes Disposal and Public Cleansing Act and local ordinances. Delegate disposal to an industrial waste disposal contractor.

**CAUTION**

Pay attention to the following points when handling power cable.

- Do not tamper with the power cable.
- Do not put heavy objects on the power cable.
- Do not bend, twist or pull the power cable by force.
- Do not route the power cable near heating appliances.



Pay attention to the following points when handling the power supply plug.  
Any mishandling of the power cable could cause a fire.

- Make sure that no foreign substances such as dust etc. are stuck to the power plug.
- Make sure that the power plug is firmly inserted to the edge of the power socket.



Wear protective equipment (gloves, goggles or eye protection, protective mask, protective clothing) when handling ink.

Be cautious that ink does not get into your eye or make a contact with your skin.

- When ink gets into your eye or make a contact with your skin, wash with water immediately.
- If left as it is, it may cause red eye or light inflammation. If it is necessary, please see your doctor immediately.



Do not disassemble ink cartridges.

If disassembled, there is a possibility that ink might come into contact with eyes or skin.



Do not operate the media loading lever during the initial operation or printing.

The print head portion may touch the pressurizing roller portion, and cause a malfunction.



Do not use volatile solvents such as thinner, benzene, or alcohol.

These solvents could cause damage to the paint.



Do not touch the media guide while printing.

The media guide becomes very hot and you could burn yourself.



Do not touch the media feed slot, platen, and media guide while the heater is working.

The media feed slot, platen, and media guide become very hot and you could burn yourself.



Be careful that no moisture enters the printer.

There is a possibility that the electric circuit inside the printer is short circuited.



Do not open covers attached using screws under any circumstances.

This may cause an electric shock or a malfunction.

-  When cleaning the cleaning wiper,
  - Do not touch the cleaning wiper and head cap unit.  
Head cleaning may not be performed correctly because of oil from your hands.
  - Make sure to wipe the print head using the cleaning stick.  
A wet cleaning stick may cause the print head to clog.
  - Do not reuse the cleaning stick.  
The attached dust, etc may damage the print head.
-  When cleaning around the capping unit,
  - Use a dry cleaning stick. A damp stick can cause damage to the print head.
  - Do not touch the tip of a cleaning stick with fingers. Skin oil will damage the print head.
  - Do not reuse a cleaning stick. Dust on the stick will damage the print head.
-  When cleaning around the print head,
  - Do not touch the nozzles of the print head.  
Doing so may damage the print head.
  - Do not touch the tip of the cleaning stick.  
The print head may be damaged because of oil from your hands.
  - Never put water, etc on the tip of the cleaning stick.  
Doing so may damage the print head.
  - Do not reuse the cleaning stick.  
The attached dust, etc may damage the print head.
-  When cleaning the color sensor,
  - Do not touch the nozzles of the print head.  
Doing so may damage the print head.
  - Do not touch the tip of the cleaning stick.  
The print head may be damaged because of oil from your hands.
  - Never put water, etc on the tip of the cleaning stick.  
Doing so may damage the print head.
  - Do not reuse the cleaning stick.  
The attached dust, etc may damage the print head.
  - Do not push the glass on the color sensor too hard with a cleaning stick. This will damage the glass.
-  Do not slant the printer, prop it against a wall or turn it upside down.  
There is a possibility that ink inside the printer may leak.  
Moreover, normal operation after shifting (to these positions) cannot be guaranteed.
-  Unpacking or moving this printer must be done by the following number of people.
  - More than three persons
-  Installing the dedicated stands on the printer must be done by the following number of people.
  - More than three persons
-  When installing the dedicated stands, make sure to turn OFF the printer and unplug the power cable.  
There may be a risk of electric shock.
-  When you do not use the printer for a long period, make sure to pull out the power plug from the power socket for safety.
-  Make sure to connect an earth wire to the earth connection that meets the following standards.
  - Earth terminal of power socket
  - Earth wire with copper plate which is buried at 650 mm or more, deep in the ground.
-  Before operation, make sure to read the Safety Data Sheet (SDS).
-  Ventilate the workplace.  
Not doing so may make you feel sick or may lead to a fire.



Right after printing, the media guide becomes very hot.  
Allow the media guide to cool down before the next operation.



When loading the roll media, place it on a flat surface such as a desk.  
If the roll media is loaded with the scroller up, the scroller may be damaged.



Pay attention to the following points when cutting roll media.  
Mishandling the razor blade may cause a cut on your finger or hand.

- When you hold media, do not place your finger on the media cut groove.
- Move the razor blade along the media cut groove.



When cleaning the areas other than the wiper, make sure to turn OFF the power and unplug the power cable.



Move the printer maintaining a horizontal position.



This equipment is not suitable for use in locations where children are likely to be present.

## 1.3 Warning labels

This section explains the handling of warning label, pasting location and types.

Warning labels are attached to parts of the printer that need special caution.

Understand the locations and the descriptions of the danger associated with each label before operating the printer.

### 1.3.1 Handling the warning labels

When handling the warning labels, be careful about the following points.


#### NOTE

- Check whether all the warning labels can be read.  
If the letters or illustrations on the label are not clear, remove the dirt from the label.
- Use cloth, water and mild detergent for removing dirt from the warning label.  
Avoid either organic solvents or gasoline.
- It is necessary to replace the labels if they are damaged, lost or illegible.  
If the warning labels have to be replaced, contact your local PrismJET Dealer.


### 1.3.2 Location and type of warning labels

Pasting locations of the warning labels are shown in the following figure.

#### (1) Front

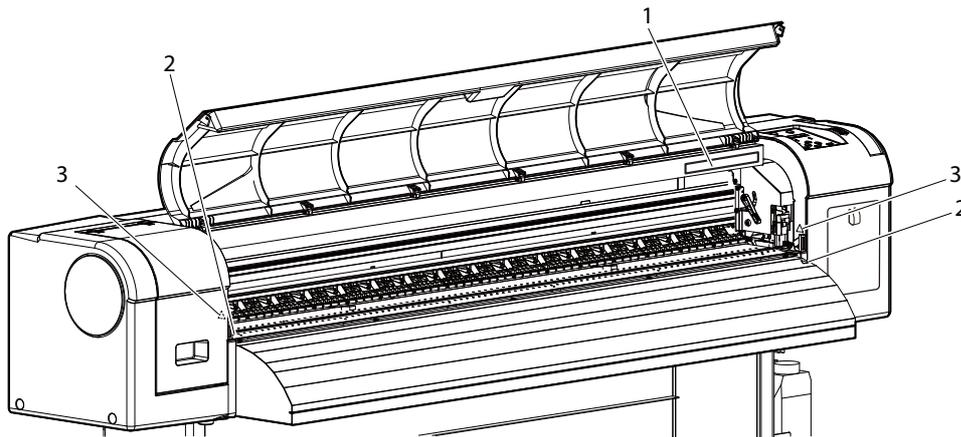

(2) Rear

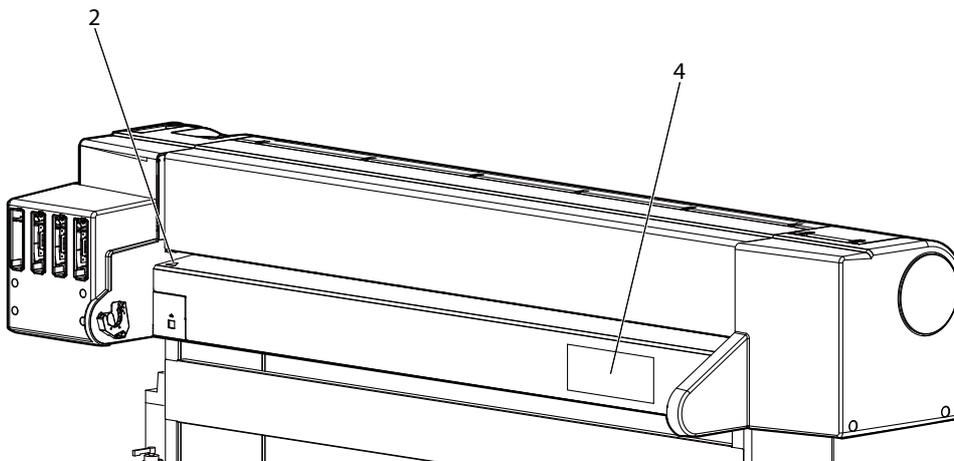

No.	Types of warning labels					
1						
2	<p>Hot Surface Caution Label The surface may get hot and may cause burn injury. Do not touch with your hand for at least 30 minutes after turning off the printer.</p>					
3	<p>Pinch hazard. Keep hands and fingers clear of covers while opening or closing.</p>					
4	<div style="border: 1px solid black; padding: 10px;"> <p style="text-align: center;"><b>MUTOH</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; vertical-align: top;"> <p>MODEL 型式</p> <p>SERIAL NO. 製造番号</p> </td> <td style="width: 30%; vertical-align: top;"> <p>VOLTAGE 100-120V~ / 200-240V~</p> <p>FREQUENCY 50 / 60 Hz</p> <p>CURRENT 10A / 6.5A</p> </td> <td style="width: 40%; vertical-align: top;"> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>CAN ICES-3 (A) / NMB-3 (A)</p> </td> </tr> </table> <p>Complies With UL 62368-1 CSA C22.2 No. 62368-1 E112544</p> <div style="display: flex; justify-content: space-around; align-items: center;"> </div> <table style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 50%; text-align: center;"> <p>定格電圧 100V~</p> <p>定格周波数 50 / 60 Hz</p> <p>消費電流 10A</p> </td> <td style="width: 50%; vertical-align: top;"> <p><b>注意</b></p> <p>この装置は、クラスA機器です。 この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。 この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A</p> <p style="text-align: right;">武藤工業株式会社 日本製</p> </td> </tr> </table> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <ul style="list-style-type: none"> <li>• Apparatet må tilkoples jordet stikkontakt</li> <li>• Apparaten skall anslutas till jordat uttag</li> <li>• Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan</li> <li>• Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord</li> </ul> </div> </div>	<p>MODEL 型式</p> <p>SERIAL NO. 製造番号</p>	<p>VOLTAGE 100-120V~ / 200-240V~</p> <p>FREQUENCY 50 / 60 Hz</p> <p>CURRENT 10A / 6.5A</p>	<p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>CAN ICES-3 (A) / NMB-3 (A)</p>	<p>定格電圧 100V~</p> <p>定格周波数 50 / 60 Hz</p> <p>消費電流 10A</p>	<p><b>注意</b></p> <p>この装置は、クラスA機器です。 この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。 この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A</p> <p style="text-align: right;">武藤工業株式会社 日本製</p>
<p>MODEL 型式</p> <p>SERIAL NO. 製造番号</p>	<p>VOLTAGE 100-120V~ / 200-240V~</p> <p>FREQUENCY 50 / 60 Hz</p> <p>CURRENT 10A / 6.5A</p>	<p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>CAN ICES-3 (A) / NMB-3 (A)</p>				
<p>定格電圧 100V~</p> <p>定格周波数 50 / 60 Hz</p> <p>消費電流 10A</p>	<p><b>注意</b></p> <p>この装置は、クラスA機器です。 この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。 この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A</p> <p style="text-align: right;">武藤工業株式会社 日本製</p>					

”~” on the rating plate represents AC voltage.




**NOTE**

- Check if all of the operating instruction labels can be read.  
If the letters or illustrations on the label are not clear, remove the dirt from the label.
- When cleaning the operating instruction labels, use a cloth, water, and mild detergent.  
Avoid either organic solvents or gasoline.
- It is necessary to replace the operating instruction labels if they are damaged, lost or unreadable.  
If the operating instruction labels have to be replaced, contact SIGNWarehouse Product Support or your local PrismJET Dealer.

### 1.4.2 Locations and Types of Operating Instruction Labels

Locations of the operating instruction labels are shown in the following figure.

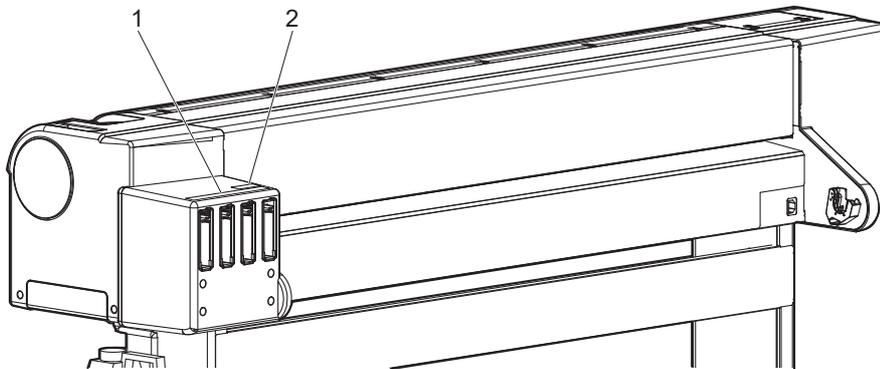

No.	Types of the operating instruction labels	Reference
1		<a href="#">3.3 Installing ink cartridges</a> <a href="#">6.1.1 Replacing ink cartridges</a>
2	<p><b>Protective equipment label</b>                      (Mask • Glasses • Gloves • Protective clothing)                      Wear protective equipment when handling ink.</p>	


## 2 Product overview

This chapter explains the names and functions of each part.

## 2.1 Names of parts and functions

This section explains the names and functions of each part.


### 2.1.1 Front section

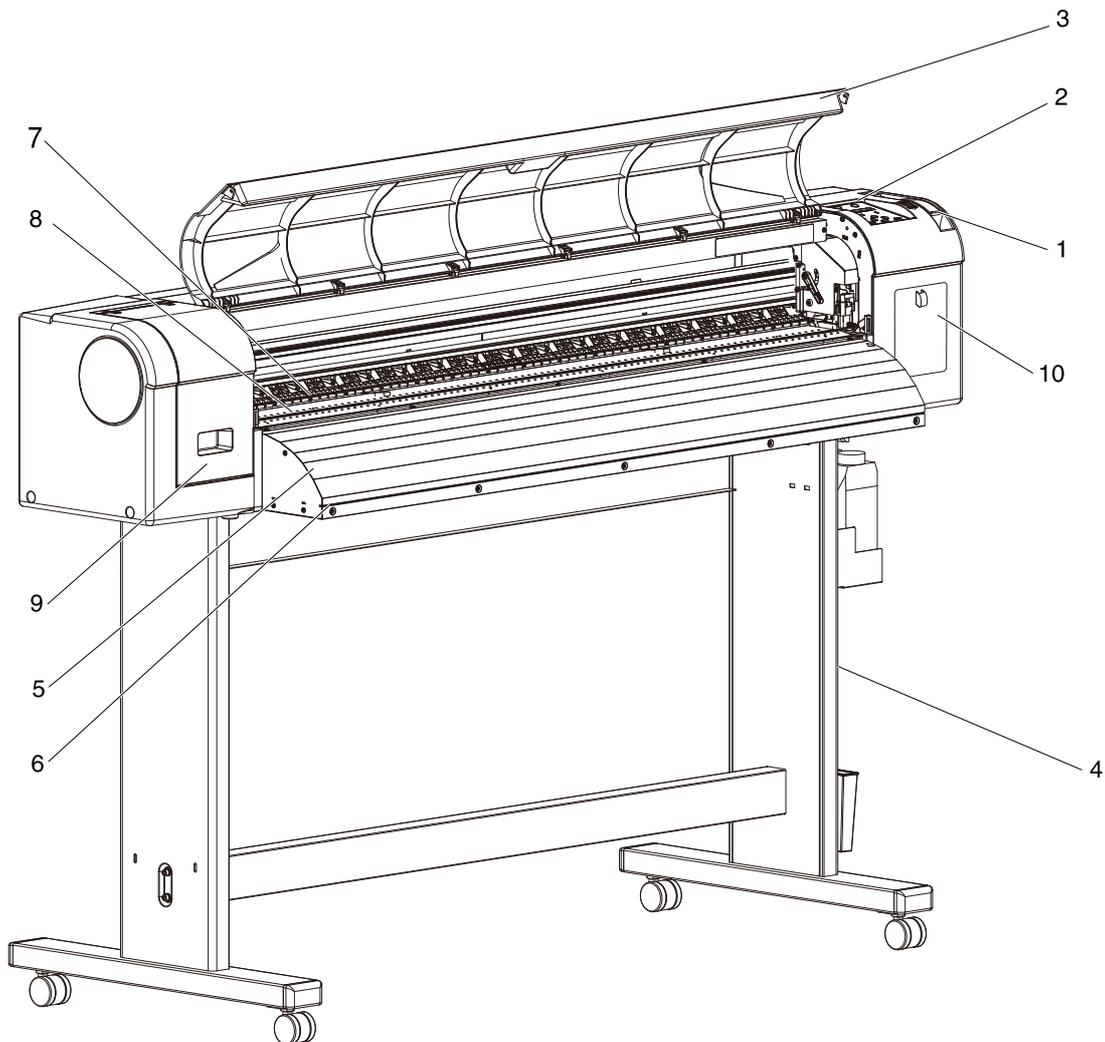

No.	Name	Function
1	Media loading lever	Used for fixing or releasing media.
2	Operation panel	Operation condition setting, printer display and various function settings are performed.
3	Front cover	Used for preventing a user from coming in contact with the driving mechanism during the printer operation. Opened and closed when media is set or jammed. It is normally closed.
4	Stand	Used when installing the printer on a flat floor.
5	Media guide	Used for feeding media smoothly when the media is set or printed.

No.	Name	Function
6	Media cut groove	Used to cut media straight.
7	Pressurizing rollers	Installed inside of the front cover. Press and hold the media when printing.
8	Platen	Installed inside of the front cover. Stabilizes the print side of the media.
9	Maintenance cover L	Used to prevent the user from touching the inner mechanical section. Open and close in the following cases. <ul style="list-style-type: none"> <li>• When cleaning around the print head.</li> <li>• When cleaning the color sensor.</li> <li>• When replacing the cutter.</li> </ul> It is normally closed.
10	Maintenance cover R	Used to prevent the user from touching the inner mechanical section. Open and close in the following cases. <ul style="list-style-type: none"> <li>• When cleaning the cleaning wiper.</li> <li>• When cleaning around the capping unit.</li> <li>• When replacing the cleaning wiper.</li> </ul> It is normally closed.

## 2.1.2 Rear section

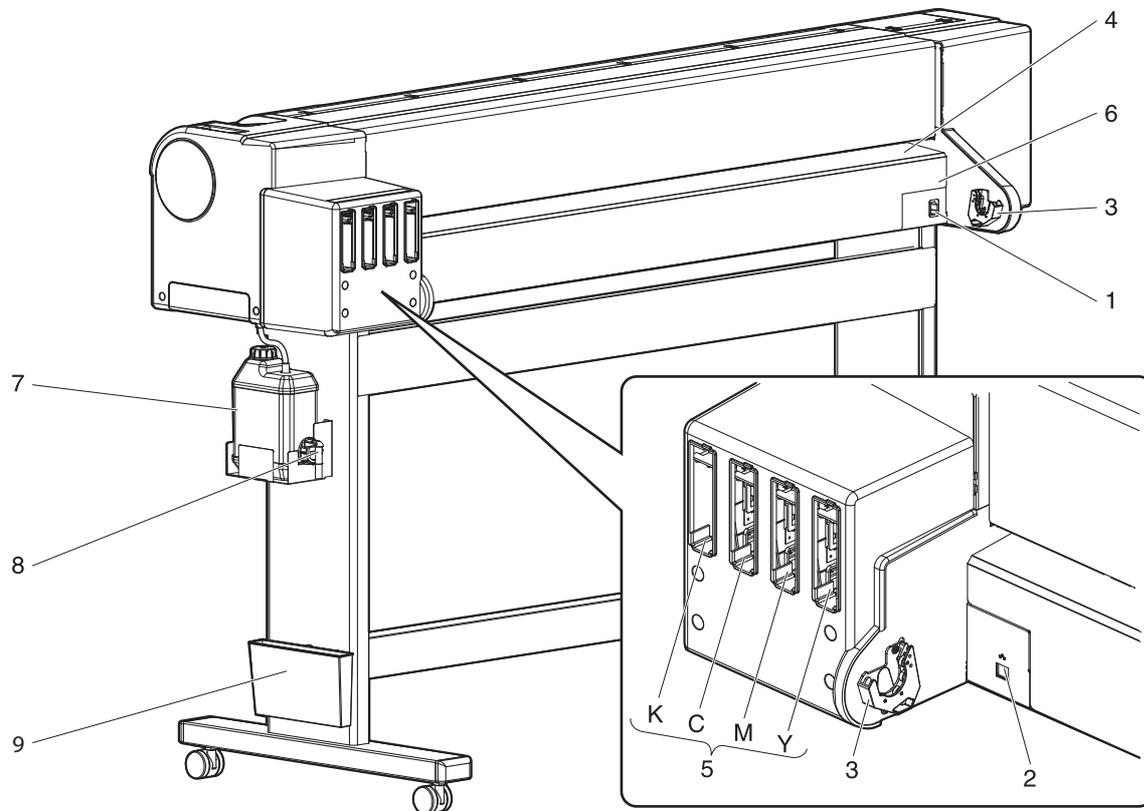


No.	Name	Function
1	AC inlet	Used for connecting the power cable.
2	Network interface cable connector	Connects a network interface cable.
3	Scroller holder	Set the scroller here when using the roll media.
4	Media feed slot	Used for feeding media.
5	Ink cartridge slot	Insert the ink cartridge.
6	Media guide	Used for feeding media smoothly when the media is set or printed.
7	Waste fluid tank	Used for collecting waste ink discharged from the printer.
8	Waste fluid valve	Open and close when discharging the waste fluid from the waste fluid tank. It is normally closed.
9	Book holder	Quick reference etc can be stored.

## 2.1.3 Operation panel

Used to set the operating conditions, to display the status of the printer, and to set various functions. Names of each operation key and status display along with the functions are explained.

### TIP

- Refer to the following for details regarding the operation method of the operation panel.
- When performing menu setting from the operation panel: [4.3 Menu setups on the operation panel](#)
- When performing various operations in the operation panel: [4.4 Operating from the operation panel](#)

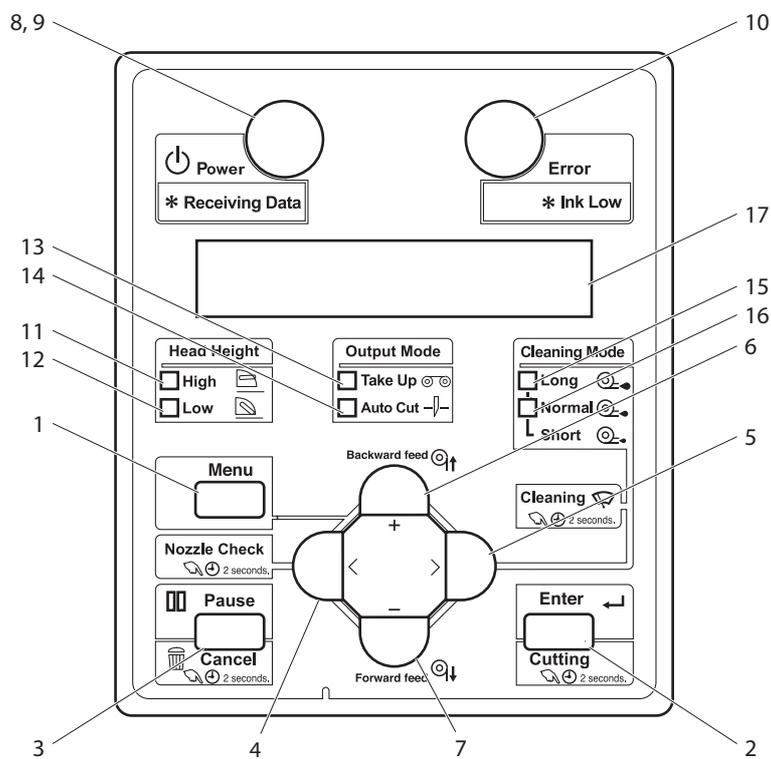

## (1) Operation keys

### NOTE

- The operation keys are assigned with different functions and names depending on printer status (Normal or Setup menu display).  
For details about printer status, refer to "[2.2 Printer status](#)".
-  indicates the printer's power state "ON"/ "Standby". Pressing the [Power] key will switch between "ON" and "Standby".  
In the Standby state, even when the power key is not turned on, the printer consumes a very small amount of power as long as the power cable is plugged in. In this manual, this state is also referred to as "power off".

No.	Name	Normal	Setup menu display
1	[Menu] key	Shifts to the Setup menu.	Shifts from Setup menu display to Normal.
2	[Enter] key	<ul style="list-style-type: none"> <li>The printer performs an automatically PF adjustment.</li> <li>Restarts printing when the printing is suspended.</li> </ul>	<ul style="list-style-type: none"> <li>Select the menu to be set, and shifts to the next hierarchy.</li> <li>The setting is determined and saved.</li> </ul>
	[Cutting] key	Cuts the media when pressed for more than two seconds.	—
3	[Pause] key	Pauses printing.	—
	[Cancel] key	<ul style="list-style-type: none"> <li>When printing: When pressed for more than two seconds, forcefully terminates printing and deletes one file of the remaining data.</li> <li>When receiving or analyzing data: When pressed for more than two seconds, deletes the data already received and analyzed.</li> </ul>	<ul style="list-style-type: none"> <li>Returns to the previous menu hierarchy. Changes made in the setting are discarded.</li> <li>Shifts from Setup menu display to Normal.</li> </ul>
4	[<] key	—	—
	[Nozzle Check] key	Press and hold this key for two seconds or more to perform Nozzle Check printing.	—
5	[>] key	<ul style="list-style-type: none"> <li>Sets Cleaning Mode.</li> <li>The lamp of Cleaning Mode that you set lights up in green.</li> </ul>	Down the menu level in the directory tree.
	[Cleaning] key	When pressed for more than two seconds, cleaning starts.	—
6	[Backward↑] key	Media is fed in the reverse direction.	—
	[+] key	—	<ul style="list-style-type: none"> <li>Changes to the previous item in the displayed menu.</li> <li>The setting is changed to the reverse direction.</li> <li>The numeric value is increased during numerical input.</li> </ul>

No.	Name	Normal	Setup menu display
7	[Forward↓] key	Media is fed in the forward direction.	—
	[-] key	—	<ul style="list-style-type: none"> <li>• Changes to the forward item in the displayed setting.</li> <li>• The setting is changed to the forward direction.</li> <li>• The numeric value is decreased during numerical input.</li> </ul>
8	[Power] key	Turns the printer ON and OFF.	Turns the printer ON and OFF.

## (2) Display section

No.	Name	Color	Status	Description
9	Power lamp	Blue	Lamp ON	Power ON.
			Lamp blinks	<ul style="list-style-type: none"> <li>• Receiving and analyzing the data.</li> <li>• Performing media initial operation.</li> </ul>
			Lamp OFF	Power OFF.
10	Error lamp	Orange	Lamp ON	An error has occurred. Error content is displayed on the LCD.
			Lamp blinks	The remaining amount of ink is low.
			Lamp OFF	There is no error.
11	High lamp	Green	Lamp ON	The head height is set to High. <ul style="list-style-type: none"> <li>• When the Low lamp is also on, The head height is set to Middle.</li> </ul>
			Lamp OFF	The head height is set to Low.
12	Low lamp	Green	Lamp ON	The head height is set to Low. <ul style="list-style-type: none"> <li>• When the High lamp is also on, The head height is set to Middle.</li> </ul>
			Lamp OFF	The head height is set to High.
13	Take Up lamp	Green	Lamp ON	Media ejection mode is set to "Take-up".
			Lamp OFF	Media ejection mode is set to "Off" or "Auto cut".
14	Auto Cut lamp	Green	Lamp ON	Media ejection mode is set to "Auto cut".
			Lamp OFF	Media ejection mode is set to "Off" or "Take-up".
15	Long lamp	Green	Lamp ON	<ul style="list-style-type: none"> <li>• Cleaning mode is set to Long.</li> <li>• When the Normal lamp is also on, Cleaning mode is set to Short.</li> </ul>
			Lamp OFF	Cleaning Mode is set to Normal.

No.	Name	Color	Status	Description
16	Normal lamp	Green	Lamp ON	<ul style="list-style-type: none"> <li>Cleaning Mode is set to Normal.</li> <li>When the Long lamp is also on, Cleaning mode is set to Short.</li> </ul>
			Lamp OFF	Cleaning Mode is set to Long.
17	LCD display section	—	—	Displays operation status of the printer or an error message.

**TIP**



When an error requiring a restart (fatal malfunction for the printer operation) occurs, all lamps blink with an alarm.

 **7.2.3 Error requiring restart**

If the error persists even when the malfunction is fixed, contact your local MUTOH dealer.



## 2.1.4 Ink level indicator

When the “Remain Ink menu” on Display menu is set to “On”, the ink level indicator that describes the ink or ink cartridge status is displayed on LCD monitor.

### ☞ 5.7 Display menu


#### ☞ 5.7.4 Remain Ink menu

- In the normal operation
  - ☞ 2.2.1 Normal
- During printing
- To display ink or cartridge errors
  - ☞ 7.2.2 Message type error display and remedies

The indicator and the corresponding Ink color labels are shown below.


#### NOTE

- The ink color labels are attached to the top of the ink cartridge slots.

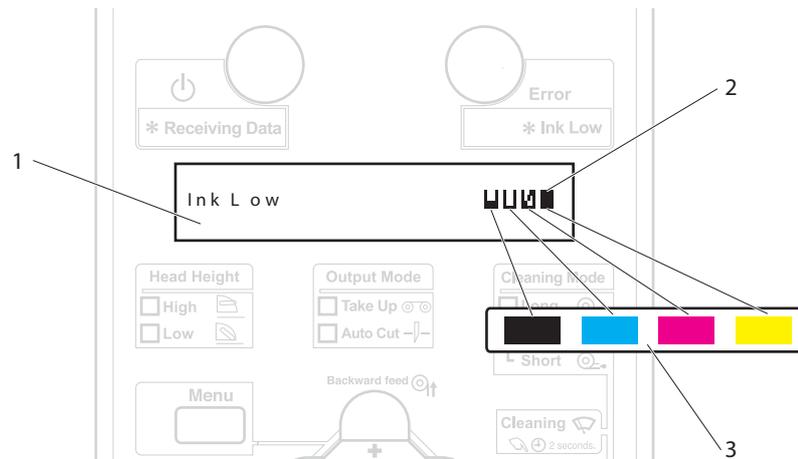

No.	Name
1	LCD display section
2	Ink level indicator
3	Ink color label(K, C, M, Y)

### 2.1.4.1 Estimated Ink level graphic

No.	Indicator to display	the conditions of ink/cartridges
1		Remaining ink amount : More than 80%, less than 100%
2		Remaining ink amount : More than 60%, less than 80%
3		Remaining ink amount : More than 40%, less than 60%
4		Remaining ink amount : More than 20%, less than 40%
5		Remaining ink amount : Less than 20% • If the indicator is blinking, smartchip recovery is being performed on the corresponding ink cartridge. <a href="#">7.4 Smartchip Recovery</a>
6		Ink Near End
7		Ink End
8		No cartridge

## 2.2 Printer status

This section explains printer status.

### 2.2.1 Normal

Printing is possible when media is loaded.

The various functions for printing can be performed on the operation panel.

### 2.2.2 Setup menu display

Various settings regarding printing can be made from the operation panel.

The various functions for printing can be performed on the operation panel.

Display contents in the LCD monitor of the operation panel are as follows.

### 2.2.3 Changing printer status

Follow the procedure below and change printer status.

#### (1) Normal → Setup menu display

Press the [Menu] key on the operation panel when the printer is Normal.

- “Menu 1: Setup>” is displayed on the operation panel and the display shifts to the Setup menu.


**NOTE**

- For details regarding the Setup menu, refer to “[4.3 Menu setups on the operation panel](#)”.
-

## (2) Setup menu display → Normal

When the printer is at the Setup menu display, perform either of the following operations to shift the operation panel to the Normal display.

- Press the [Cancel] or [Menu] key on the operation panel.
- In the Setup menu, leave the keys untouched for three minutes.

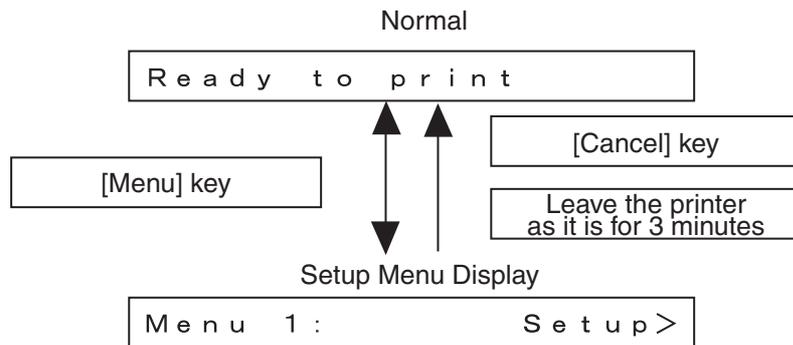

### NOTE

- For details on Status message, refer to “[7.2.1 Status messages](#)”.

## **3 Before using**

This chapter explains necessary steps before using the printer.

## 3.1 Power cable connection

This section explains power cable connection.

### WARNING

- **Be sure to use the specified power cable.**  
Using power cables other than the specified can cause an electric shock or fire.
- **Use a power cord set which is compatible with the safety standards, power supply voltage, and plug shape used in the country where this printer is used.**
- **Use a power cord set which is equipped with a protective earth, and securely connect it to the outlet.**
- **Do not use a damaged power cable.**  
It could lead to an electric shock and fire.

### CAUTION


- **Pay attention to the following points when handling power cable.**
  - **Do not tamper with the power cable.**
  - **Do not put heavy objects on the power cable.**
  - **Do not bend, twist or pull the power cable by force.**
  - **Do not route the power cable near heating appliances.**

### NOTE

- Contact SIGNWarehouse Product Support in case of power cable damage.
- This product is also designed for IT power distribution system with phase-to-phase voltage 230V.

Follow the procedure below to install the power cable.


1. Make sure that the printer is turned OFF.

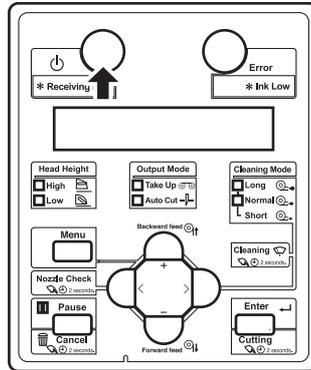

### NOTE

- The power is ON when the [Power] key of the operation panel is pressed in. Press the key once again to turn OFF the power.

2. Connect the power cable to the AC inlet on the back of the printer.

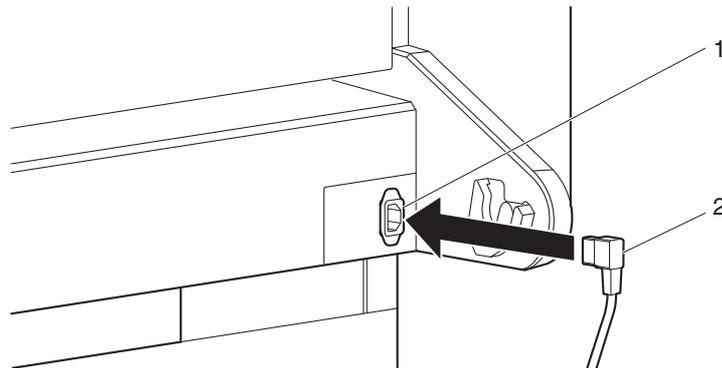

No.	Name
1	AC inlet
2	Power cable

3. Insert the power cable plug firmly in the socket.

**⚠ WARNING**


- **Do not pull out or insert the power plug with a wet hand.**  
This could lead to an electric shock.
- **Make sure to use only the specified power supply (AC 100 V to 120 V or AC 200 V to 240 V).**  
If a power supply other than the specified voltage is used, it could cause an electric shock and fire.
- **Take power for the printer directly from the power socket (AC 100 V to 120 V or AC 200 V to 240 V).**  
Do not use multiple plugs on the same socket.  
This could generate heat and might cause fire.
- **Be sure to use a dedicated power socket with earth wire for the power supply, and connect it to the earth wire.**  
If the earth wire is not connected, an electric shock or fire may occur.
- **Do not connect an earth wire to the following places.**
  - **Gas pipes**  
There is a possibility of ignition and explosion.
  - **Earth wire of telephone cables and lightning rods**  
Heavy current might flow whenever lightning strikes.
  - **Water pipe and faucet**  
The earth might not work if a plastic pipe is connected in the middle of the metal pipe.

**⚠ CAUTION**

- **Pay attention to the following points when handling the power supply plug.**  
Any mishandling of the power cable could cause a fire.
  - **Make sure that no foreign substances such as dust etc. are stuck to the power plug.**
  - **Make sure that the power plug is firmly inserted to the edge of the power socket.**
  - **When you do not use the printer for a long period, make sure to pull out the power plug from the power socket for safety.**
- **Make sure to connect an earth wire to the earth connection that meets the following standards.**
  - **Earth terminal of power socket**
  - **Earth wire with copper plate which is buried at 650 mm or more, deep in the ground.**

**NOTE**

- Contact the retail outlet of purchase if the earth connection cannot be established, or if the earth connection is not given.
- When the power supply of the printer is ON, do not pull out the power cable from the power socket. Whenever the plug is pulled out from the power socket, allow one minute or more before inserting the plug in the power socket again.

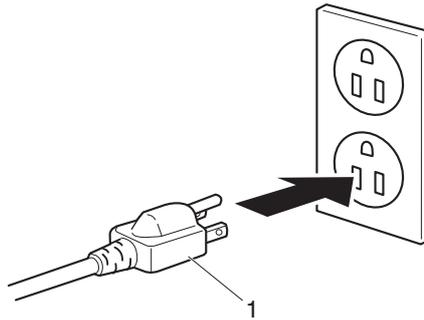

No.	Name
1	Power plug


## 3.2 Turning the power ON/OFF

This section explains how to turn the printer ON/OFF.

### 3.2.1 Turning the power ON

Follow the procedure below to turn the power ON.

1. Press the [Power] key on the operation panel to turn ON the printer.
  - Power lamp on the operation panel turns on (blue).

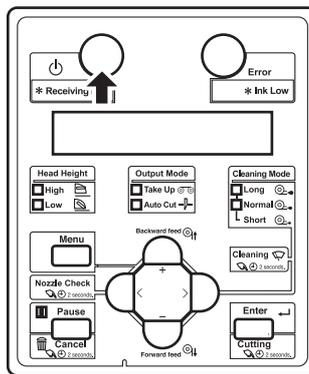

- The printer starts initial operation.
- When the initial operation is complete, the printer enters Normal.

#### NOTE

- If there is a problem during the initial operation, a message is displayed on the operation panel and the printer may stop operating.  
If operation stops, refer to “[7 Troubleshooting](#)” and deal with the problem.

### 3.2.2 Turning the power OFF


Follow the procedure below to turn the printer OFF.

1. Verify the following regarding the operational condition of the product.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.
2. Press the [Power] key on the operation panel to turn OFF the printer.
  - The Power lamp on the operation panel is turned off.

#### NOTE

- If the operation panel is in the following status, the power is ON.
  - The [Power] key is pressed in.
  - Power lamp is on (blue).

Press the key once again to turn OFF the power.

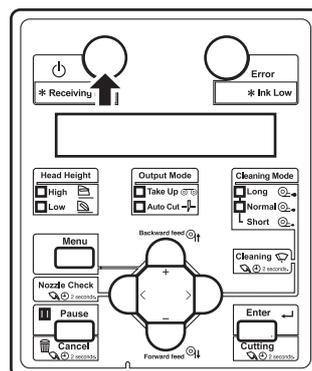


- The printer starts the procedure to turn the power OFF.
- “Power Off” is displayed on the operation panel.
- All the lamps on the operation panel and the LCD monitor are turned OFF.
- The printer automatically turns the power OFF.

#### NOTE

- If there is a problem during turning OFF operation, a message is displayed on the operation panel and the printer may stop operating.  
If operation stops, refer to “[7 Troubleshooting](#)” and deal with the problem.
- After turning OFF the printer, wait for ten seconds or longer to turn it ON again.

3. Raise the media loading lever when the product is not used for a long time.

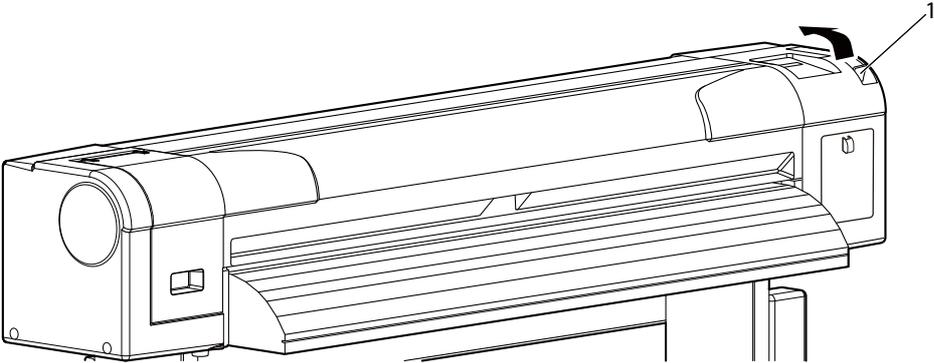

No.	Name
1	Media loading lever

## 3.3 Installing ink cartridges

This section describes the procedure to install the ink cartridges and high capacity pack adapter.

### CAUTION

- **Before operation, make sure to read the Safety Data Sheet (SDS).**
- **Wear protective equipment (gloves, goggles or eye protection, protective mask, protective clothing) when handling ink.**  
**Be cautious that ink does not get into your eye or make a contact with your skin.**
  - **When ink gets into your eye or make a contact with your skin, wash with water immediately.**
  - **If left as it is, it may cause red eye or light inflammation. If it is necessary, please see your doctor immediately.**
- **Do not disassemble ink cartridges.**  
**If disassembled, there is a possibility that ink might come into contact with eyes or skin.**
- **Do not perform the following operations during ink charging.**
  - **Do not turn OFF the printer.**
  - **Do not unplug the power cable.**
  - **Do not open the cover.**
  - **Do not raise the media loading lever.**


**NOTE**

- Do not share the ink cartridge once installed with another printer. The cartridge will not be usable from that time onward.
- Use genuine ink cartridges or ink bags for charging.  
This printer is designed to use genuine ink cartridges or ink bags.  
If you use ink cartridges or ink bags which are not authorized by SIGNWarehouse or MUTOH,
  - Printing might become blurred and the end of the ink in the cartridge or bag might not be detected correctly.
  - Any problems caused by using an ink cartridge or bag other than those recommended above will not be covered by the warranty, and repair expenses will be paid by the customer.
- For types and details of ink cartridges and ink bags, contact SIGNWarehouse or your authorized PrismJET reseller.
- Do not give ink cartridges or ink bags strong shakes.  
Doing so may cause ink leakage.
- Do not disassemble ink cartridges or ink bags.  
A disassembled ink cartridge cannot be used.
- Make sure to use the dedicated cleaning fluid  
(Model number: PRNI-SW-EIP-220-CLN-MUT).
- Before installing the ink cartridges or ink bags, Agitate it gently.  
Doing so will preserve print quality.
- When an ink cartridges or ink bags is moved from a cold place to warm place, keep the ink cartridges or ink bags for three hours or more in the new printing environment before printing.
- Do not insert or remove the ink cartridges or ink bags more than 10 times.  
If the ink cartridge has been removed/inserted more than 10 times, it cannot be used even though ink remains.
- The ink cartridges and ink bags for this printer have dedicated IC chip on them.  
If removing/inserting the ink cartridges or ink bags and high capacity pack adapters (option) in the following situations, the information within the IC chips may be damaged and the cartridges cannot be used.
  - During printing
  - For several seconds after inserting the ink cartridge

### 3.3.1 Installing 220 ml ink cartridges


Follow the procedure below to install the 220 ml ink cartridge.

1. Turn the printer ON.

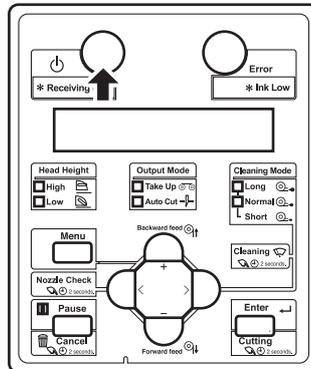

- The printer starts the initializing operation.
- After the initial operation is complete, “Start Ink Charge – > E” is displayed on the operation panel.

2. Press the [Enter] key on the operation panel.

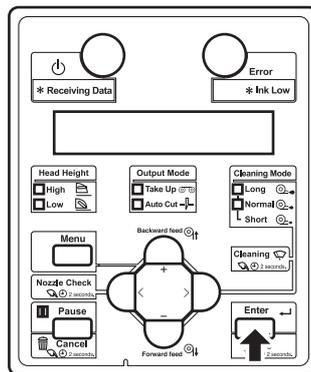


- “Insert Cleaning cart.” is displayed on the operation panel.

3. Take out the cleaning cartridges (4 pieces) from the bag.

4. Set the cleaning cartridge to the ink cartridge slot.


- Keep ▲ mark of the cleaning cartridge facing up and insert towards the printer side.
- Insert the cleaning cartridge all the way to the end of the slot.

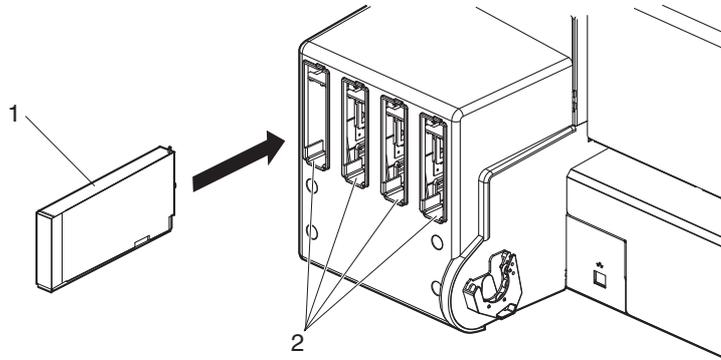

No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- When all cleaning cartridges are installed, “Busy-Washing” is displayed on the operation panel, and the printer starts charging the cleaning fluid.
- When the cleaning fluid has been charged, “Remove Cartridges” is displayed on the operation panel.

5. Remove all cleaning cartridges.

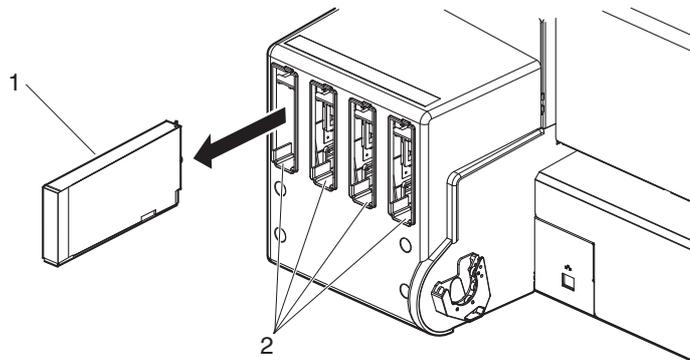


No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- “Busy-Washing” is displayed on the operation panel and the printer starts head cleaning.
- When head cleaning is complete, “Wash retry? No” is displayed on the operation panel.


**NOTE**

- When performing head cleaning again before ink charge, press the [+] or [-] key on the operation panel to select “Yes”, and press the [Enter] key to perform head cleaning.

6. Press the [Enter] key on the operation panel.

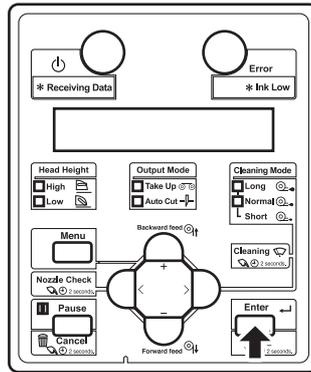


- “Insert InkCartridges” is displayed on the operation panel.
7. Take out the new ink cartridge from the bag.
8. Agitate the ink cartridges.
- Turn the ink plug upward and wait for 3 seconds.
  - Next, turn the ink plug downward and wait for 3 seconds.
  - Repeat that 10 times.

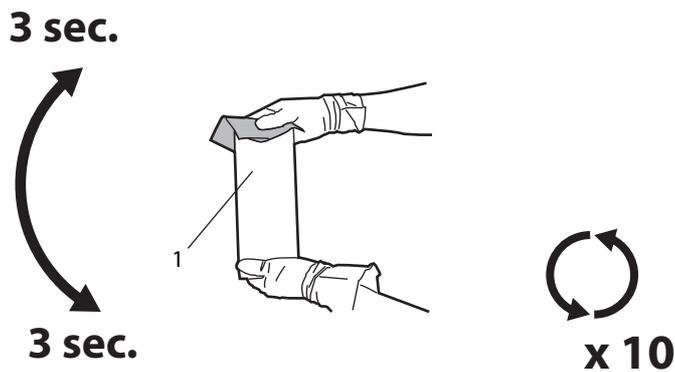

No.	Name
1	Ink cartridge

## 9. Insert the ink cartridges into Ink cartridge slots.

- Make sure that the ink cartridges are inserted into the correct slots.  
Match the mark in front of the slot and the color of the ink before inserting the ink cartridge.
- Keep ▲ mark of the ink cartridge facing up and insert towards the printer side.
- Insert the ink cartridge all the way to the end of the slot.

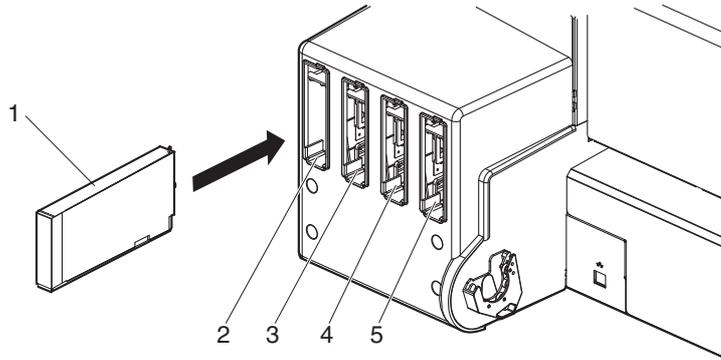

No.	Name
1	Ink cartridge
2	Ink cartridge slot K
3	Ink cartridge slot C
4	Ink cartridge slot M
5	Ink cartridge slot Y

- “Ink Refill \*\*%” is displayed on the operation panel and initial ink charge starts.
- Initial ink charge takes about four minutes.  
Ink charging operation and pause operation are repeated during the initial ink charge.
- When “100%” is displayed, the initial ink charge is complete.

**CAUTION**

- **Do not perform the following operations during ink charging. If charging is interrupted, ink will be lost when charging is resumed.**
  - **Do not turn OFF the printer.**
  - **Do not unplug the power cable.**
  - **Do not open the front cover.**
  - **Do not open the maintenance cover.**
  - **Do not raise the media loading lever.**

- After the initial ink charge is complete, “Media End” is displayed on the operation panel.

**NOTE**

- If the printer performs the nozzle check printing immediately after initial ink charge is complete, the following results may occur.
- Printed lines become blurred.
- The data is partially not printed.

In such cases, follow “**6.2.3 Head cleaning**” and perform “Little Charge”. Then, check the printing result.

If there is no improvement in the print result even after performing “Little Charge”, leave the printer unused for an hour or more. Then, perform “Little Charge” again and check the print result.

If there is still no improvement, contact SIGNWarehouse Product Support.


---

### 3.3.2 Installing high capacity pack adapters (option)


Use the optional high capacity pack adapters to use the 1,000 ml ink bags on this printer.

Follow the procedure below to install the high capacity pack adapters.

1. Turn the printer ON.

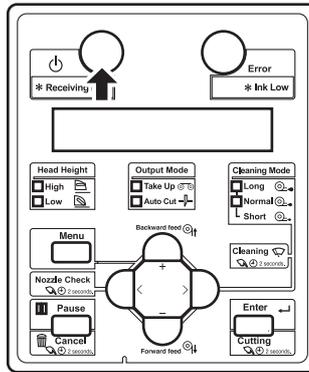


- The printer starts the initializing operation.
  - After the initial operation is complete, “Start Ink Charge –> E” is displayed on the operation panel.
2. Press the [Enter] key on the operation panel.

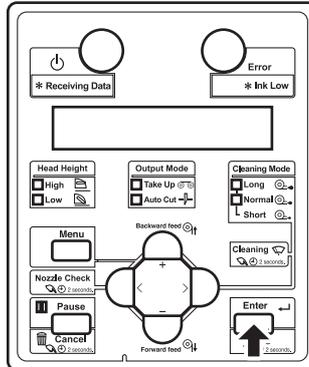

- “Insert Cleaning cart.” is displayed on the operation panel.
3. Take out the cleaning cartridges (4 pieces) from the bag.

## 4. Set the cleaning cartridge to the ink cartridge slot.


- Keep ▲ mark of the cleaning cartridge facing up and insert towards the printer side.
- Insert the cleaning cartridge all the way to the end of the slot.

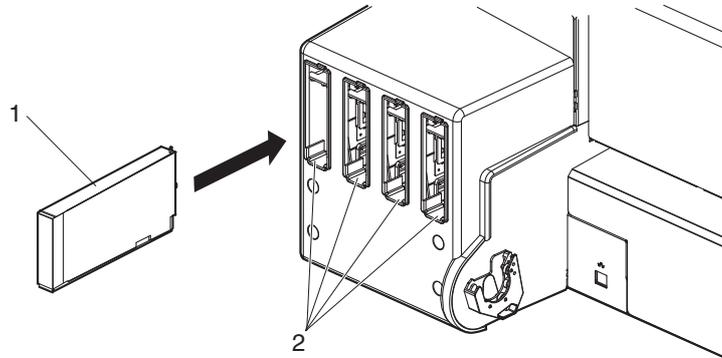

No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- When all cleaning cartridges are installed, “Busy-Washing” is displayed on the operation panel, and the printer starts charging the cleaning fluid.
- When the cleaning fluid has been charged, “Remove Cartridges” is displayed on the operation panel.

## 5. Remove all cleaning cartridges.

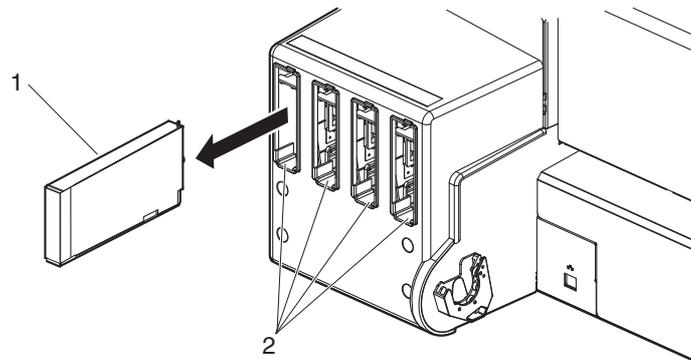


No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- “Busy-Washing” is displayed on the operation panel and the printer starts head cleaning.
- When head cleaning is complete, “Wash retry? No” is displayed on the operation panel.

**NOTE**

- When performing head cleaning again before ink charge, press the [+] or [-] key on the operation panel to select “Yes”, and press the [Enter] key to perform head cleaning.

6. Press the [Enter] key on the operation panel.

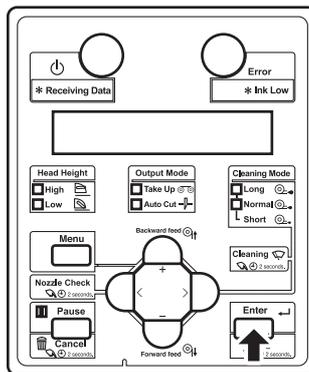

- “Insert InkCartridges” is displayed on the operation panel.

7. Take out the new ink bag from the bag.

8. Install the ink bag and smart chip card to high capacity pack adapter.


9. Agitate the ink bag.

- To prevent the ink bag and the High capacity ink pack adapter from separating, hold one hand against the top of the ink bag. Rotate the plug of the ink bag vertically and hold for 3 seconds.
- Then, invert the ink bag with the adapter and hold for 3 seconds.
- Repeat that 10 times.

**3 sec.**



**3 sec.**



**x 10**


No.	Name
1	Ink bag

10. Insert the High capacity ink pack adapters into Ink cartridge slots.

**NOTE**

- Do not insert the high capacity pack adapter into the ink cartridge slot without a cleaning fluid bag attached.  
The information of the remaining amount will be overwritten and the cleaning fluid bag will not be usable.

- Insert the high capacity pack adapter all the way to the end of the slot.

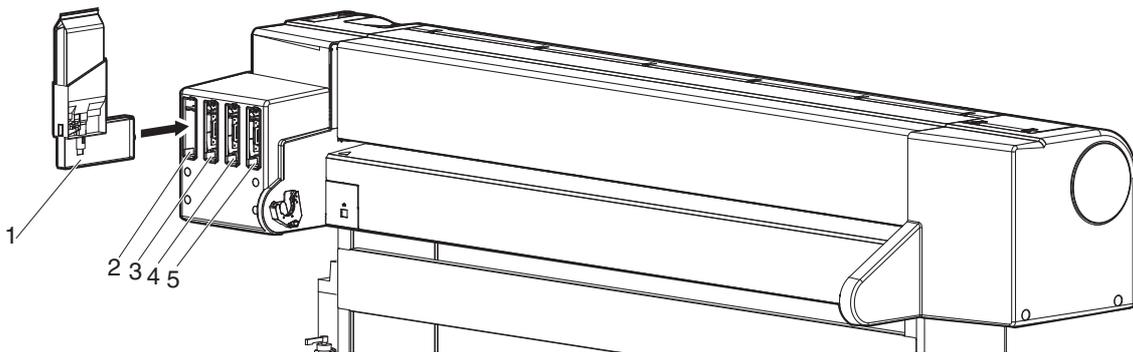

No.	Name
1	High capacity pack adapter
2	Ink cartridge slot K
3	Ink cartridge slot C
4	Ink cartridge slot M
5	Ink cartridge slot Y

- When a high capacity pack adapter is installed, “Ink Refill \*\*%” is displayed on the operation panel and ink charging starts.
- Initial charging takes about four minutes.  
Ink charging operation and pause operation are repeated during the ink charging.
- When “100%” is displayed, the ink charging is complete.

**CAUTION**

- **Do not perform the following operations during ink charging. If charging is interrupted, ink will be lost when charging is resumed.**
  - **Do not turn OFF the power of the printer.**
  - **Do not unplug the power cable of the printer.**
  - **Do not open the front cover.**
  - **Do not open the maintenance cover.**
  - **Do not raise the media loading lever.**

- After the ink charging is complete, “Media End” is displayed on the operation panel.

**NOTE**

- If the printer perform the nozzle check printing immediately after initial ink charging is complete, the following results may occur.
- Printed lines become blurred.
- The data is partially not printed.

In such cases, follow “[6.2.3 Head cleaning](#)” and perform “Little Charge”. Then, check the printing result.

If there is no improvement in the print result even after performing “Little Charge”, leave the printer unused for an hour or more. Then, perform “Little Charge” again and check the print result.

If there is still no improvement, contact SIGNWarehouse Product Support.

### 3.3.3 When using the high capacity pack adapter for the printer whose ink is charged for the first time

The air inside the high capacity pack adapter goes into the printer ink tube and may cause nozzle clogging. Make sure to perform initial ink charge from the Cleaning menu in the following case.

- When using the high capacity pack adapter for the printer whose ink is charged for the first time
- When replacing the high capacity pack adapter’s adapter itself with a new one

#### [5.3 Cleaning menu](#)

## 3.4 Loading media

This section explains how to load and set media, and settings for each media type.

### NOTE

Refer to the following for details about handling media.

 [4.2 Media](#)

### 3.4.1 Loading roll media

This section describes the procedure to load the roll media.

To load the roll media, use the scroller included with the printer.

### NOTE

The following roll media can be loaded on the scroller included with the printer.


- Media tube with a diameter of three inches: Less than 6 inches (150 mm) in outer diameter, less than 42lbs (19 kg) in weight.
- Media tube with a diameter of two inches: Less than 6 inches (150 mm) in outer diameter, less than 42lbs (19 kg) in weight.

Follow the procedure below to load the roll media.

### CAUTION


- **When loading the roll media, place it on a flat surface such as a desk.  
If the roll media is loaded with the scroller up, the scroller may be damaged.**

- When using the roll media with the media tube width of two inches, remove the attachments for three-inch media from the movable media stopper and fixed media stopper.

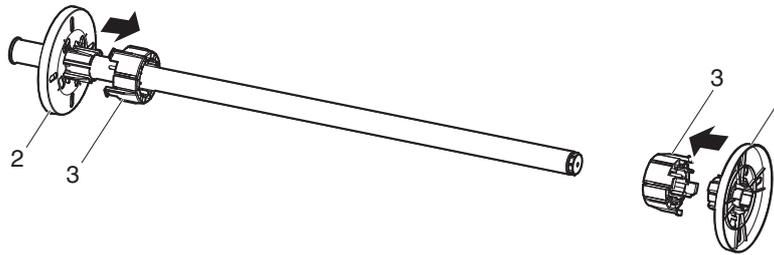


No.	Name
1	Movable media stopper
2	Fixed media stopper
3	Attachments for three-inch media

- To set the roll media on the scroller, make sure that the paper is rolled counter-clockwise when seen from the fixed media stopper.
- Insert the roll media all the way till its core touches the right edge of the fixed media stopper.

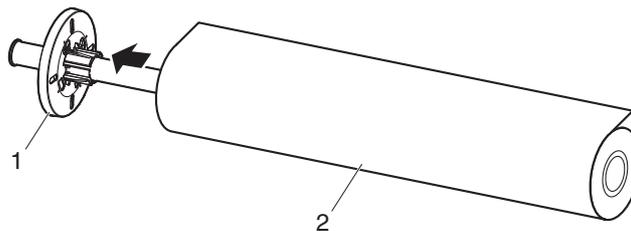


No.	Name
1	Fixed media stopper
2	Roll media

- Attach the movable media stopper firmly to the core of the roll media.

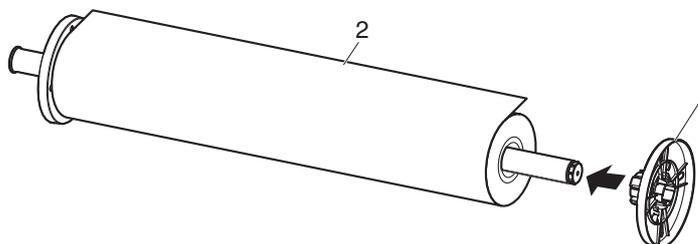

No.	Name
1	Movable media stopper
2	Roll media

5. Set the scroller on the holder with the fixed media stopper on the ink cartridge slot side.

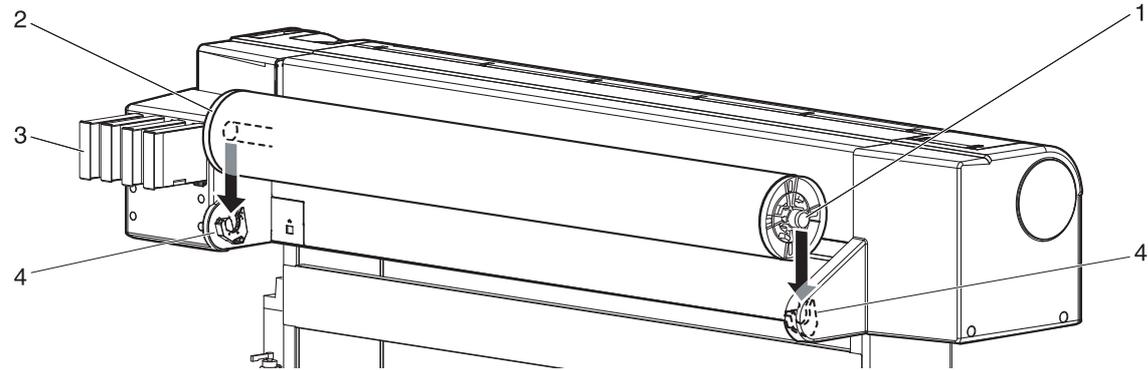


No.	Name
1	Scroller
2	Fixed media stopper
3	Ink cartridge slots
4	Scroller holder

### 3.4.2 Setting Roll Media

This section explains how to set the roll media.

Follow the procedure below to set the roll media.


1. Turn the printer ON.

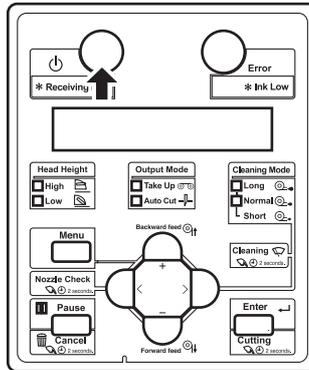

**CAUTION**

- Do not operate the media loading lever during the initial operation or printing. The print head portion may touch the pressurizing roller portion, and cause a malfunction.

2. Raise the media loading lever.
  - The printer starts the initializing operation.
  - “Media End” is displayed on the operation panel.

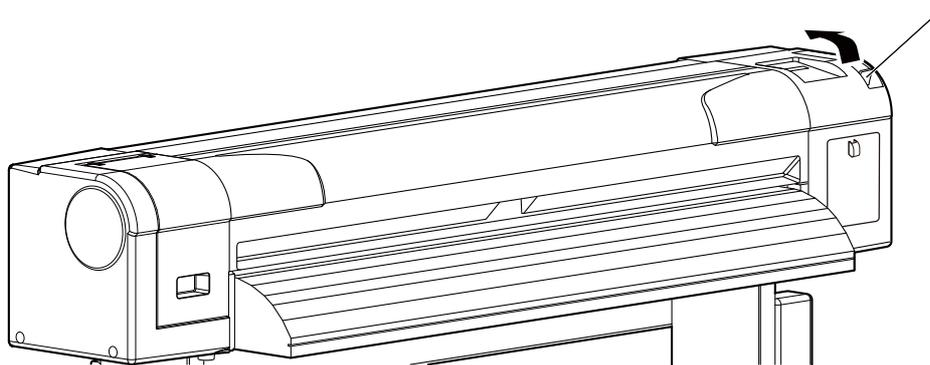


No.	Name
1	Media loading lever

- “Load Media” is displayed on the operation panel.

3. Set the roll media to the media feed slot.


**NOTE**

- If the end of the roll media is not wound tightly, wind it tightly again, and then load it.

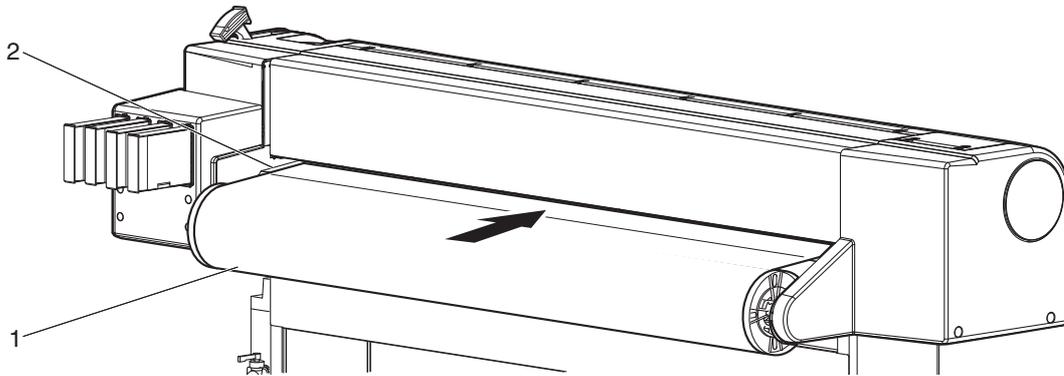


No.	Name
1	Roll media
2	Media feed slot

4. Open the front cover to pull out the roll media.

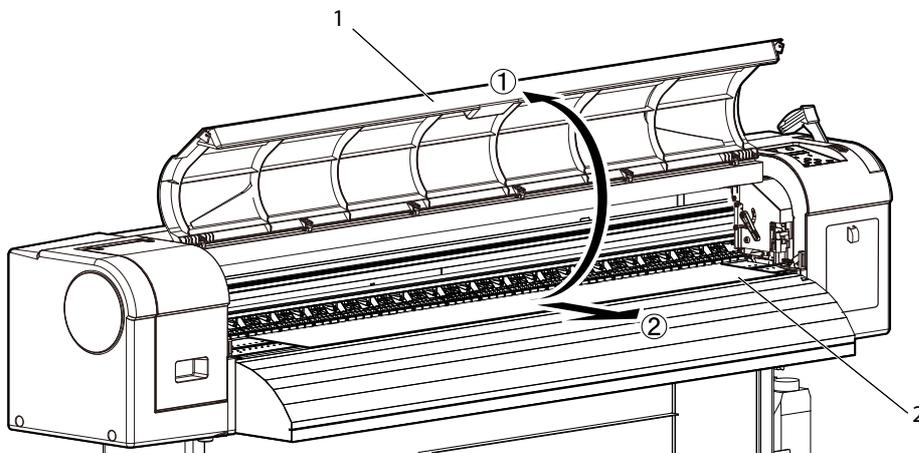


No.	Name
1	Front cover
2	Roll media

5. Wind back the roll media with the scroller to remove a media bend or slant.

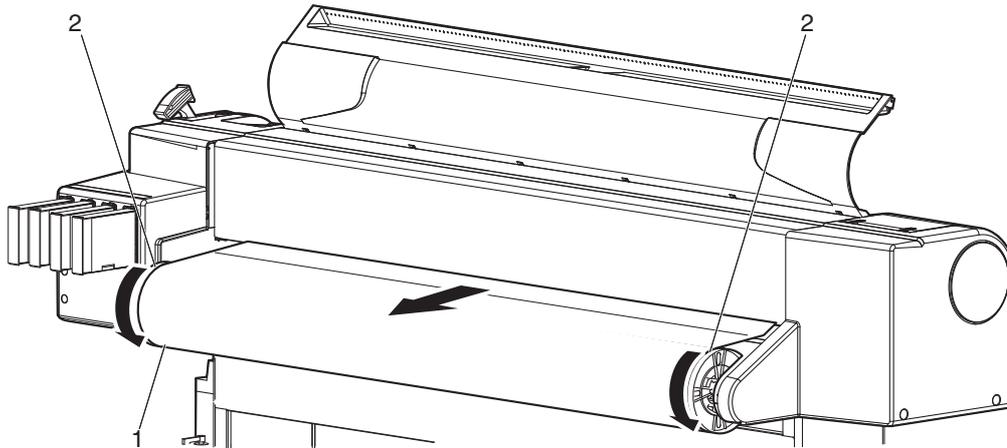

No.	Name
1	Roll media
2	Scroller

6. Lower the media loading lever.

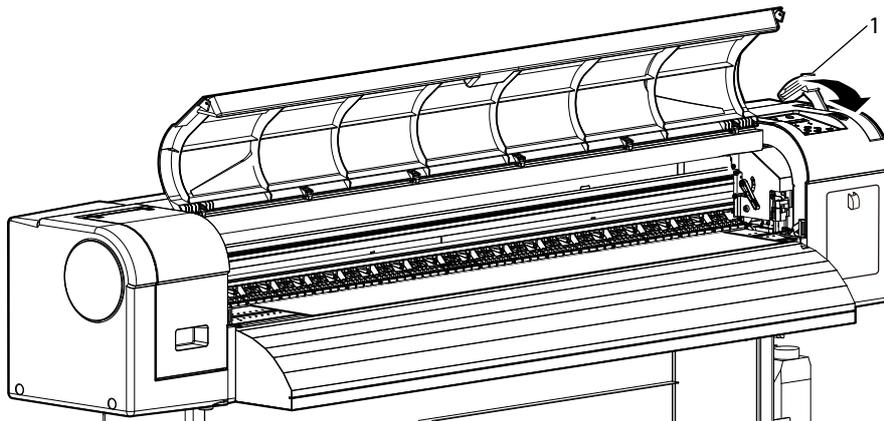


No.	Name
1	Media loading lever

**NOTE**

- When loading the new roll media, cut the front edge of the media if it is not straight.

[4.4.4 Cutting media](#)

7. Close the front cover.

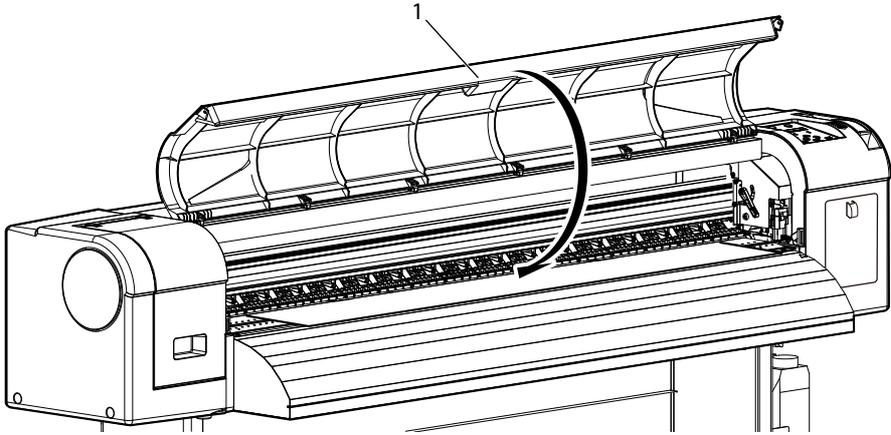

No.	Name
1	Front cover

- The User type setup menu is displayed on the operation panel.


**TIP**

To change the media type, follow “[3.4.4 Setting the User Type Setting](#)” and set the media type.

### 3.4.3 Releasing the Partial Function of Pressure Arms


If thin media is creased while printing, release some of Pressure arms. This may prevent getting creases. Follow the procedure below to release Pressure arms.

1. Raise the media loading lever.

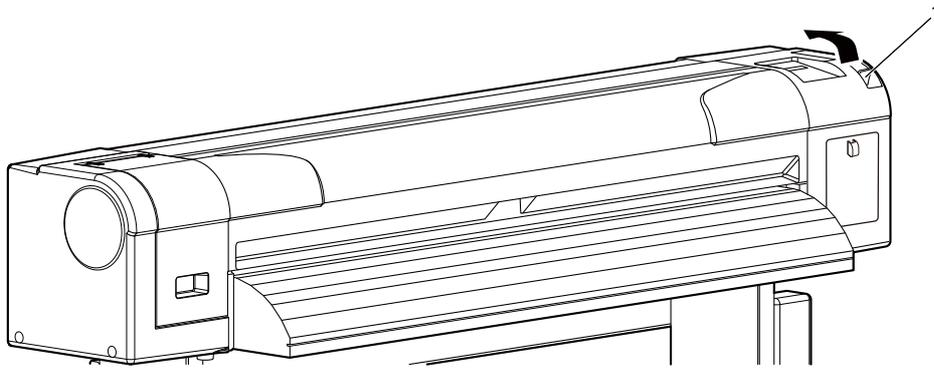

No.	Name
1	Media loading lever

2. Push the release switches of Pressure arms further in that are holding the sides of the media.
  - When the release switch is set further in, Pressure arms lose the pressure.

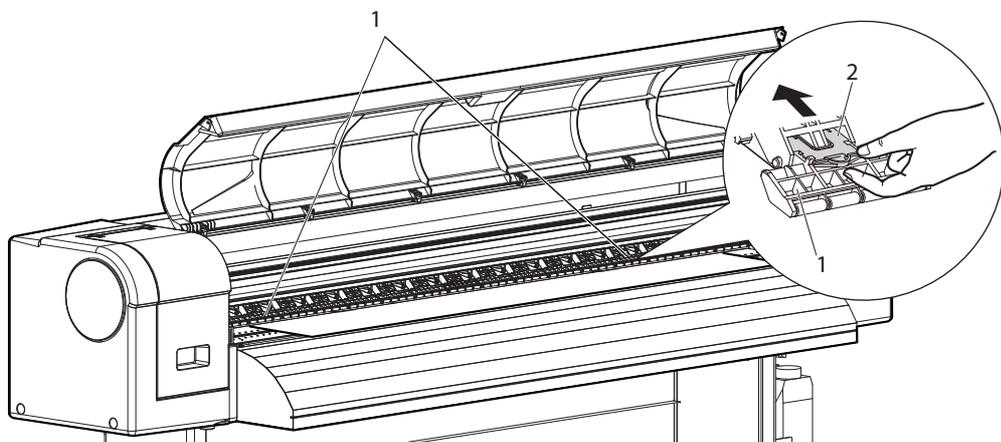

No.	Name
1	Pressure arms
2	Release switch

**NOTE**

- When releasing the function, make sure to release Pressure arms of both sides of the media as a set.

3. If media still gets creases, increase the number of Pressure arms to release.

**NOTE**


- The media may still get creases even when more Pressure arms are released.
-

### 3.4.4 Setting the User Type Setting

This section explains how to set the user type setting.

Follow the procedure below to set the user type setting.

1. Turn ON the printer and load media.

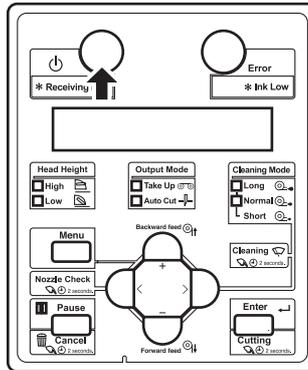


- After loading the media, the printer enters the user type setting menu.

#### TIP


Refer to the following for setting media.

 [3.4.2 Setting Roll Media](#)

2. Press the [+] key or [-] key to select the user type setting.

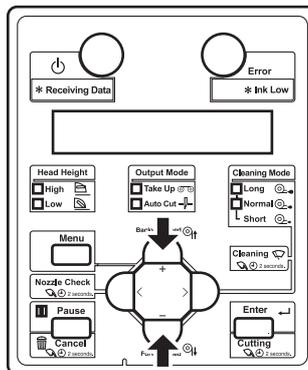

- Press the [Enter] key on the operation panel.

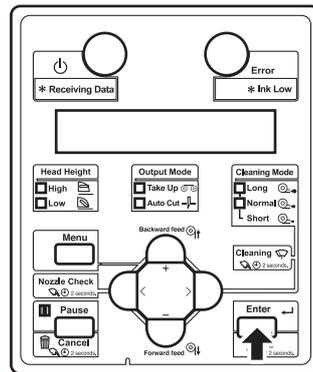

- The user type setting is set.
- “Media initial” is displayed on the operation panel and media initialization starts.


#### NOTE

If the following operations are performed in the user type setting menu, the printer starts media initial operation without specifying a user-defined setting.

- Pressing the [Cancel] key on the operation panel.
- No keys on the operation panel are pressed for 30 seconds.

- After media initial operation is complete, detected media width is displayed on the operation panel.  
Press the [Enter] key on the operation panel and the display shifts to Normal.

- When using the roll media, turn the scroller by hand to rewind the roll media and eliminate any slack.

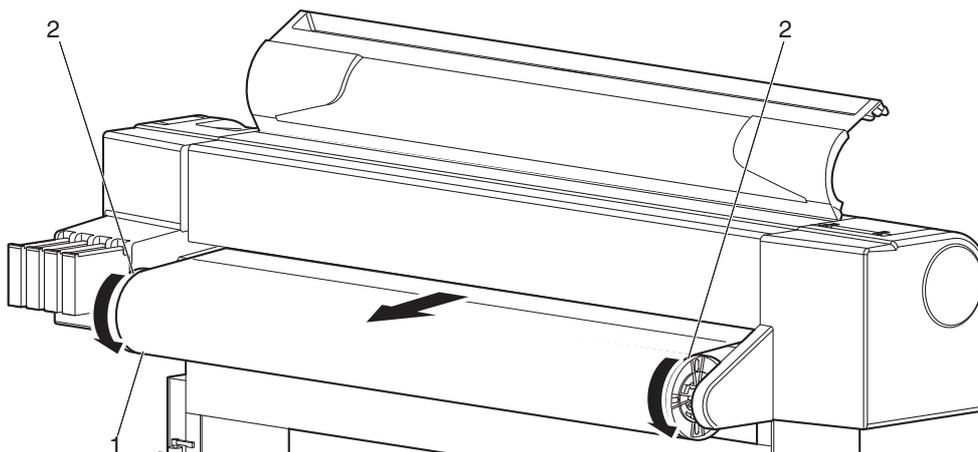


No.	Name
1	Roll media
2	Scroller

- Media set is complete.


## 3.5 Test print

Follow the procedure below to perform Test printing to confirm that the printer works correctly.


1. Turn ON the printer and load the media.  
 🔗 [3.4.2 Setting Roll Media](#)
2. Confirm that the printer functions normally.
3. Display the Test Print menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

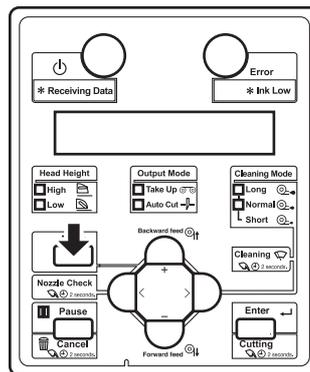

- “Menu 1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [+] key or [-] key to select “Menu2: Test Print>”.

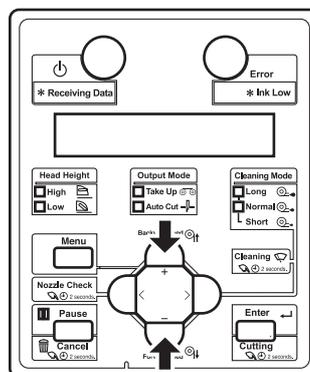


- c. Press the [>] key on the operation panel.

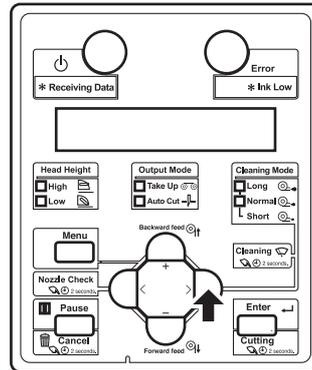

- “Test1: Nozzle Check” is displayed on the operation panel.
- The display shifts to the Test Print menu.

#### 5.2 Test Print Menu

4. Press the [+] key or [-] key on the operation panel to select an item for printing from the following items.
- Nozzle Check
  - Nozzle Check F
  - Mode Print
  - Setup List
  - Palette

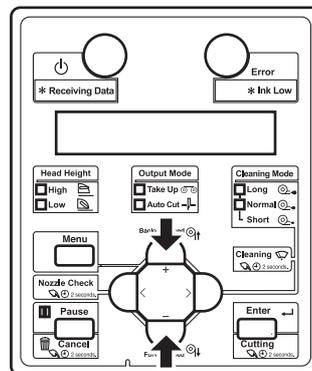


### NOTE

When the selected print mode of the user type is Quality or Production, Palette menu is not displayed.

#### 5.1.1.1 Print Mode menu

- Press the [Enter] key on the operation panel.

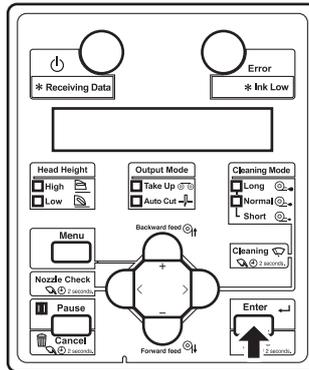


- Start performing Test Print for the selected item.

**TIP**

Refer to the following for details on each of the print list items.

☞ [3.5.1 Nozzle check](#) to [3.5.5 Palette print](#)

- Repeat step 4 to step 5 when performing test print for other items.
- Press the [Cancel] key on the operation panel to exit from test print.

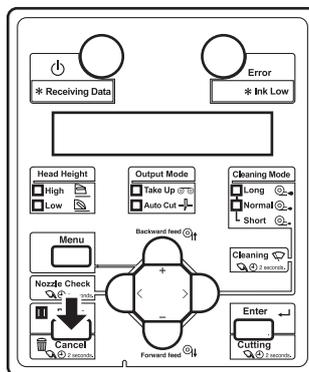

- The operation panel returns to Normal.
- The procedure for test printing is complete.

### 3.5.1 Nozzle check

It is used to check whether there are any clogged heads, or missing or blurred prints.  
Print a nozzle check pattern selected from Nozzle setting menu.

 [5.1.26 Select Nozzle menu](#)

#### NOTE

- If the nozzle check result indicates that the checked points are blurred or missing, clean the head.  
 [6.2.3 Head cleaning](#)  
Perform the nozzle check once again at the end of the work.



#### TIP

- Refer to the following for printing procedure.

 [3.5 Test print](#)

- The printer information (date and time of printing, printer's serial number, firmware version, Select Nozzle setting) is printed on the nozzle check pattern.

OK



### 3.5.2 Nozzle check F

It is used to check whether there are any clogged heads, or missing or blurred prints.  
Print a nozzle check pattern using all of the nozzles on the print head.


#### NOTE

- If the nozzle check result indicates that the checked points are blurred or missing, clean the head.  
➤ [6.2.3 Head cleaning](#)  
Perform the nozzle check once again at the end of the work.

#### TIP

- Refer to the following for printing procedure.  
➤ [3.5 Test print](#)
- The printer information (date and time of printing, printer's serial number, firmware version, Select Nozzle setting) is printed on the nozzle check pattern.

OK



### 3.5.3 Mode print

Used to confirm the following printing conditions.

- Print Mode
- Effect
- Preset Pre heater temperature
- Preset platen-heater temperature
- Preset dryer temperature
- Adjustment value

**TIP**

Refer to the following for printing procedure.

 **3.5 Test print**

2021/07/01 0:00 Quality-i-Screen/Pre:30°C/Platen:30°C/Dryer:30°C/PF Adjust:0.00%



### 3.5.4 Setup print

Used to check the current setup of the printer.

**NOTE**

- Keep the printed setup print at hand.

**TIP**

Refer to the following for printing procedure.

**3.5 Test print**

Setup List

<Information>		<Display>	
SerialNo. = XXX000001	Total print = XXX m <sup>2</sup>	Language = English	2021/07/01 0:00
Model = XZJ-1341SR-P	Firmware M = V1.00	Temperature = Celsius[ C]	
Memory Size = 256MB	Firmware C = V1.10	Length = mm	
<Menu Setup>		Head Height: Low Cleaning Mode: Normal	
[Number][Select]Menu = Setup	[1][User Type] = Type 1	[Number][Select]Menu = Setup	[19][*]IP Address = 192.168.001.253
[1][Print Mode] = High Quality (Effect = i-Screen)	[2][Adjust Print]	[20][*]Subnet Mask = 255.255.255.0	[21][*]Gateway = 192.168.001.254
[3][PF Adjust]	[1]Auto	[22][*]Header Dump = Off	[23][*]Start Feed = 0.0mm
[2]Initial Adj.Print	[2]Initial Adj.Print = 250.0/250mm	[24][*]Alert Buzzer = On	[25][*]FrontInterlace = Auto
[4]Confirm Adj.Print	[5]Micro Adj. Print = 0.00%	[26][*]Select Nozzle	[1]Print
[5]Micro Adj. Print	[6]PreHeater = 30 C	[2]Nozzle Settings = Nozzle ALL	
[6]PlatenHeater = 30 C	[7]Dryer = 30 C		
[7]Vacuum Fan = Medium	[8]Thickness = 170 mm	<Ink Status>	SmartChip KCMY 85/ 85/ 28/ 24
[8]Thickness = 170 mm	[9]UserCopy		
[9]UserCopy	[2][*]Spitting = On(Pass Count = 1cnt)	<Life Times>	
[10][*]Prevent Stick = Off	[3][*]Side Margin = 5mm	Head : E*****F	
[11][*]Standby Heating = 60min	[4][*]Media Initial = Width	Pump : E***F	
[12][*]Head Travel = Data	[5][*]Media Width = 1000mm	CR Motor : E*****F	
[13][*]Multi Strike = 1cnt	[6][*]Output Mode = Off	PF Motor : E***F	
[14][*]Strike Wait = 0.0sec	[7][*]Method of Cut = SingleCut-2steps(InkDryerTimer= 0sec)	<SleepModeSettings>	
[15][*]Media Slant = On	[8][*]Origin = Off	CleaningTimer = 24h	
[16][*]Auto Cleaning	[9][*]Prevent Stick = Off	<RollPaperRemain>	
WaitingTime = 360min	[10][*]Standby Heating = 60min	[1]Print	
PrintingTime = Off	[11][*]Head Travel = Data	[2]Simple Print	
Before Print = Off	[12][*]Multi Strike = 1cnt	[3]Scan	
[16][*]Longstore	[13][*]Strike Wait = 0.0sec	[4]Roll Length = Roll1 (Length = 200m)	
[17][*]CR Maintenance	[14][*]Media Slant = On	(PrintStop = On; NearEnd = 10m)	
[18][*]Initialization	[15][*]Auto Cleaning	[5]Auto Scan = On	
	PrintingTime = Off		
	Before Print = Off		
	[16][*]Longstore		
	[17][*]CR Maintenance		
	[18][*]Initialization		

<User Type List>					
User Type	Type 1	Type 2	Type 3	Type 4	Type 5
Print Mode	Quality	Quality	Quality	Quality	Quality
Print Mode>Effect	i-Screen	i-Screen	i-Screen	i-Screen	i-Screen
PF>Initial Adj	250.0 / 250mm				
PF>Micro Adjust	0.00%	0.00%	0.00%	0.00%	0.00%
PreHeater	Off	Off	Off	Off	Off
PlatenHeater	Off	Off	Off	Off	Off
Dryer	Off	Off	Off	Off	Off
Vacuum Fan	High	High	High	High	High
Thickness	170 μm				
User Type	Type 6	Type 7	Type 8	Type 9	Type10
Print Mode	Quality	Quality	Quality	Quality	Quality
Print Mode>Effect	i-Screen	i-Screen	i-Screen	i-Screen	i-Screen
PF>Initial Adj	250.0 / 250mm				
PF>Micro Adjust	0.00%	0.00%	0.00%	0.00%	0.00%
PreHeater	Off	Off	Off	Off	Off
PlatenHeater	Off	Off	Off	Off	Off
Dryer	Off	Off	Off	Off	Off
Vacuum Fan	High	High	High	High	High
Thickness	170 μm				
User Type	Type11	Type12	Type13	Type14	Type15
Print Mode	Quality	Quality	Quality	Quality	Quality
Print Mode>Effect	i-Screen	i-Screen	i-Screen	i-Screen	i-Screen
PF>Initial Adj	250.0 / 250mm				
PF>Micro Adjust	0.00%	0.00%	0.00%	0.00%	0.00%
PreHeater	Off	Off	Off	Off	Off
PlatenHeater	Off	Off	Off	Off	Off
Dryer	Off	Off	Off	Off	Off
Vacuum Fan	High	High	High	High	High
Thickness	170 μm				

### 3.5.5 Palette print

Palette print is executed for the color demonstration.

**NOTE**


When the selected print mode of the user type is Quality or Production, Palette menu is not displayed.

☞ [5.1.1.1.1 Print Mode menu](#)

**TIP**

Refer to the following for printing procedure.

☞ [3.5 Test print](#)

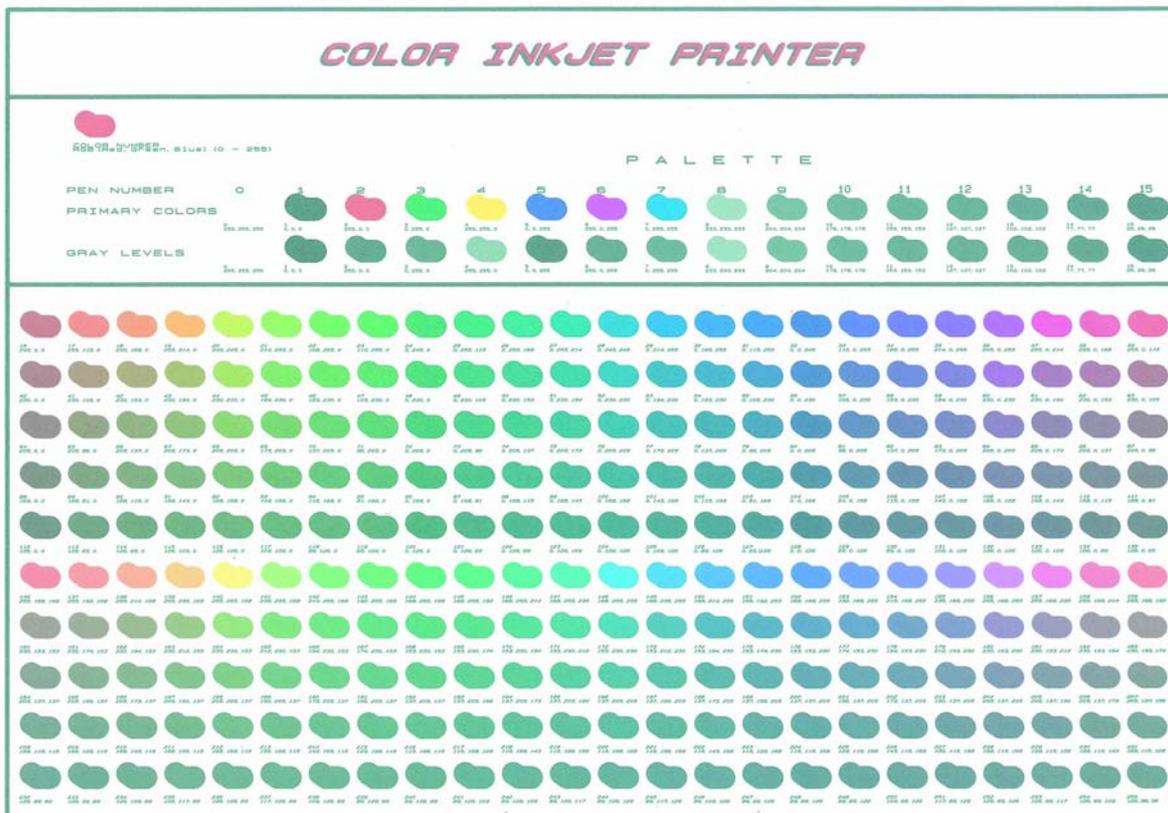

## 3.6 Adjust Print

It is used for optimizing the quality of image prints.  
Adjustment methods for this printer are as follows.

Adjustment method	Description	Reference
Auto	Perform an automatic calibration that the printer automatically prints and scans a pattern with the embedded color sensor to correct dot placement.	 <a href="#">3.6.2 Auto Adjust Print</a>
Standard	Adjusts only the print mode used by the current user definition. When you have adjusted the print mode using Standard, make the resolution, pass count, and print direction of the print mode on the RIP side equal to those of the user-defined print mode	 <a href="#">3.6.3 Standard Adjust Print</a>
Custom	Allows you to adjust also a print mode other than the print mode used by the current user definition. This method optimizes print quality even if the print mode on the RIP side is different from the user-defined mode.	 <a href="#">3.6.4 Custom Adjustment Pattern</a>


### NOTE

- When newly setting or changing the user type setting after adjusting Standard adjust print, make sure to adjust print.
- If print defects (like banding or grainy look) still appear on the print, try an auto calibration again, or go to "Standard" or "Custom" to perform calibration.  
 [3.6.3 Standard Adjust Print](#)  
 [3.6.4 Custom Adjustment Pattern](#)
- When the print mode is changed after Standard adjust print, perform Standard adjust print again.
- Since all print modes are adjusted at once after performing Custom adjust print, adjust print is not required even after changing the print mode.
- When specifying a print mode for RIP software, etc, that is different from the mode set in the usertype setting, perform Custom head adjustment and check all patterns (A to F), and then adjust any patterns that are misaligned beforehand.
- "Adjust Print" requires at least 21.6" (550 mm) printable width. Before printing, make sure that there is sufficient width on the media.  
If printable width is less than 21.6" (550 mm), your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.  
 [5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)

### 3.6.1 Periodic “Adjust Print” Message Prompt

The message appears on the operation panel every 30 days to prompt you to run an adjustment print.

1. The error LED in the operation panel flashes, and beep sound.
  - “Perform Adjust Print” is displayed on the operation panel.
2. Press the [Enter] key on the operation panel.

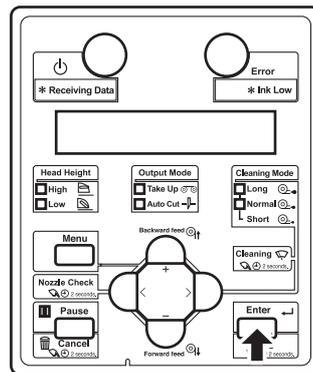

- When the message disappears, print an adjust print pattern.
  - ↳ [3.6.2 Auto Adjust Print](#)
  - ↳ [3.6.3 Standard Adjust Print](#)
  - ↳ [3.6.4 Custom Adjustment Pattern](#)

### 3.6.2 Auto Adjust Print

Perform the automatic adjustment using the embedded color sensor. This menu is made up with the following menus.


Menu Name	Description
All	Perform automatic adjustment for all patterns (A to F) using the color sensor.
Standard	Perform automatic adjustment for the currently selected print mode using the color sensor (calibrate the same print mode as " <a href="#">3.6.3 Standard Adjust Print</a> ").
Pattern A to F	Choose the adjustment pattern between A and F for automatic adjustment.

Follow the procedure below to adjust print quality.

1. Turn ON the printer and load the roll media.
  - ↳ [3.4.2 Setting Roll Media](#)


2. Display the Adjust Print menu on the operation panel.

- a. Press the [Menu] key on the operation panel.

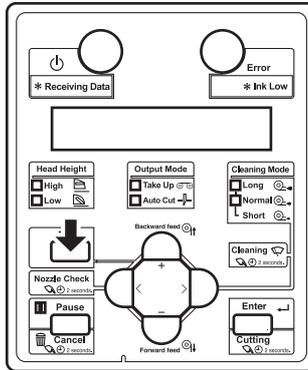


- “Menu1: Setup>” is displayed on the operation panel.

- b. Press the [>] key on the Operation panel.

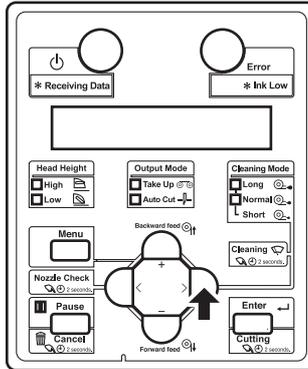


- “Set1: User Type” is displayed on the operation panel.

- c. Press the [Enter] key on the Operation panel.

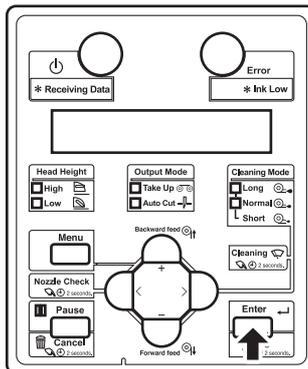


- “User: TypeXX” (XX is a number between 1 and 15) is displayed on the operation panel.

- d. Press the [+] key or [-] key on Operation panel to select the user type setting.

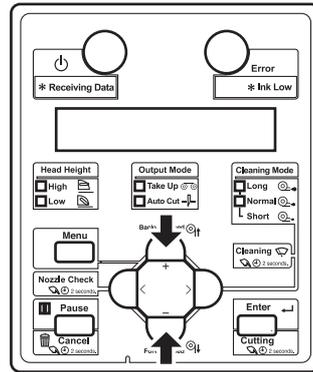


- e. Press the [Enter] key on the operation panel.

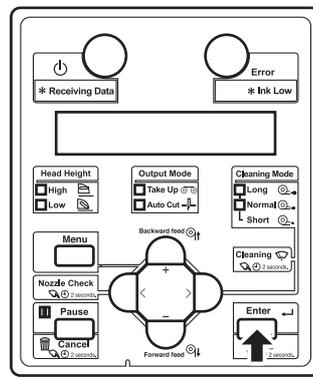


- “\*\*>1: Print Mode” is displayed on the operation panel.

- f. Press the [+] key or [-] key to select “\*\*>2: Adjust Print>”.

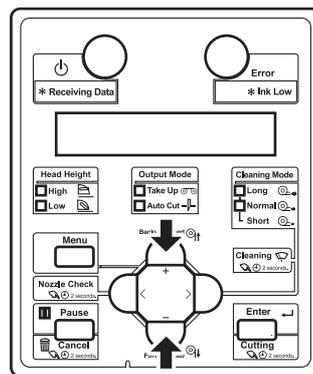


- g. Press the [>] key on the operation panel.

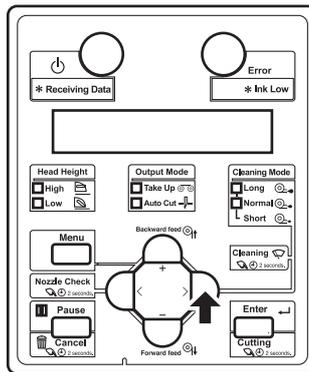


- “Thickness 170  $\mu\text{m}$ ” is displayed on the operation panel. (The default is set to 170  $\mu\text{m}$ . If the default value has been changed, the changed value is displayed.)
- h. Press the [+] key or [-] key and enter the thickness of the paper to use in the range of 80  $\mu\text{m}$  to 1,300  $\mu\text{m}$ .
- This setting is the same as “Media thickness menu”.

#### 5.1.1.1.9 Media thickness menu

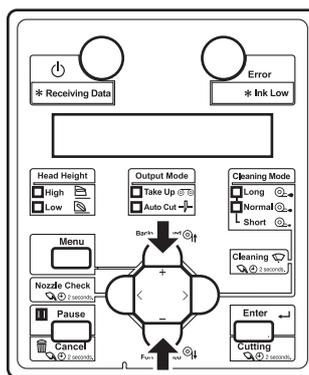


- i. Press the [Enter] key on the operation panel.

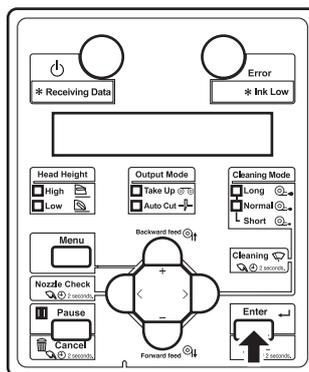

- Media thickness value is set.
- “Adj.Print1: Auto” is displayed on the operation panel.


- j. Press the [Enter] key on Operation panel.

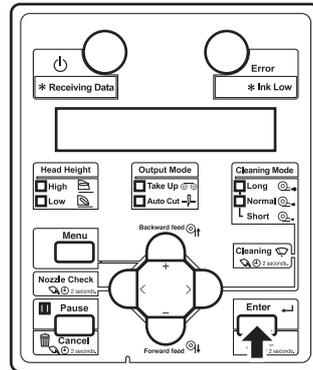


- “Auto1: All” is displayed on the operation panel.
- The display enters the Adjust Print menu.

#### 5.1.1.1.3 Adjust Print menu

- k. Press the [+] key or [-] key and enter the adjustment pattern from "ALL", "Standard", or any specific pattern between "Adjust Pattern A" and "Adjust Pattern F".

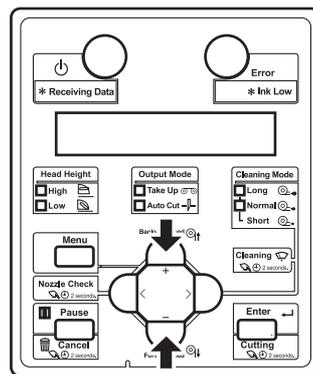

3. Press the [Enter] key on the Operation panel.

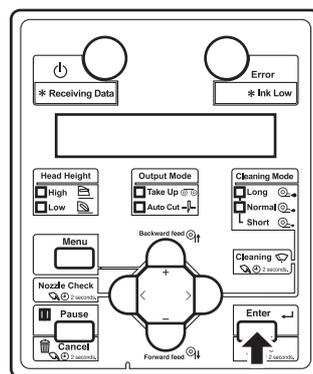

- “Warming Up Skip ->E” is displayed on Operation panel.


**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**

- You can start printing during warming up.  
 [4.4.8 Start Printing during Warm up](#)

- A confirmation pattern for print quality adjustment is printed.  
 (Starts printing after warming up is complete.)
- The printer scans the print using the embedded color sensor, then automatically corrects the dot placement.
    - Once successfully completed, the message “Auto Adjust Succeeded” will appear on the panel.
    - If failed, the message “Auto Adjust Failed” will appear on the panel.
  - Press the [Enter] key on the Operation panel.

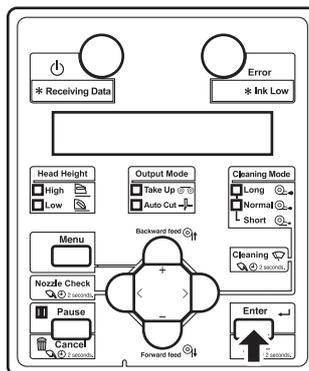

- The previous setup menu is displayed.

**NOTE**

- If failed in the middle of the calibration, the adjustment value for the pattern which has been successfully calibrated will be saved in the printer, but the adjustment value for the pattern which has been failed to calibrate or has not been calibrated yet will not be saved in the printer.
- If print defects (like banding or grainy look) still appear on the print, try an auto calibration again, or go to "Standard" or "Custom" to perform calibration.

 [3.6.3 Standard Adjust Print](#)

 [3.6.4 Custom Adjustment Pattern](#)

### 3.6.3 Standard Adjust Print

Adjusts only the print mode in the user type setting which is currently set.  
This menu is made up with the following menus.

Menu Name	Description	Reference
Standard Confirmation Pattern	Print the confirmation pattern and check the amount of misalignment.	 <a href="#">3.6.3.1 Standard Confirmation Pattern</a>
Standard Rough Adjustment Pattern	Perform this adjustment when the misalignment is large.	 <a href="#">3.6.3.2 Standard Rough Adjustment Pattern</a>
Standard Micro Adjustment Pattern	Perform this adjustment when the misalignment is small.	 <a href="#">3.6.3.3 Standard Micro Adjustment Pattern</a>

Follow the procedure below to adjust print quality.

1. Print the confirmation pattern and check the amount of misalignment.  
 [3.6.3.1 Standard Confirmation Pattern](#)
2. Perform rough adjustment when the misalignment is large.  
 [3.6.3.2 Standard Rough Adjustment Pattern](#)  
Perform micro adjustment when the misalignment is small.  
 [3.6.3.3 Standard Micro Adjustment Pattern](#)

#### NOTE

- Perform rough adjustment first when the degree of misalignment is difficult to determine.

3. Print the confirmation pattern and check if the printer is adjusted properly.  
 [3.6.3.1 Standard Confirmation Pattern](#)
4. If the printer is not adjusted, go back to Step 2.


#### NOTE

- When you are not satisfied with the result of rough adjustment, perform micro adjustment.


### 3.6.3.1 Standard Confirmation Pattern

Print the confirmation pattern for the print mode in the user type setting which is currently set.

1. Turn ON the printer and load the roll media.
  - ✎ **3.4.2 Setting Roll Media**
2. Display the Adjust Print menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

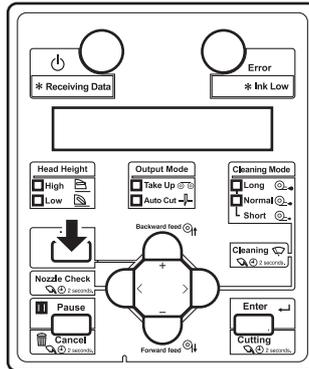


- “Menu1: Setup>” is displayed on the operation panel.
- b. Press the [>] key on the Operation panel.

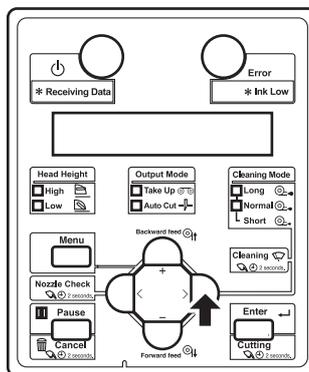


- “Set1: User Type” is displayed on the operation panel.

- c. Press the [Enter] key on the Operation panel.

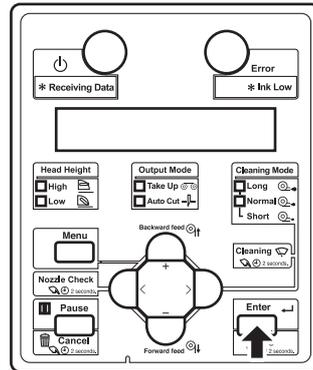


- “User: TypeXX” (XX is a number between 1 and 15) is displayed on the operation panel.

- d. Press the [+] key or [-] key on Operation panel to select the user type setting.

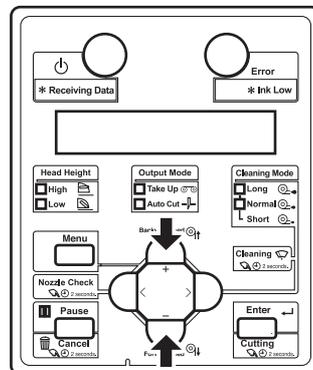


- e. Press the [Enter] key on the operation panel.

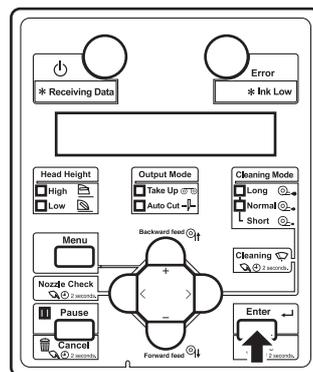


- “\*\*>1: Print Mode” is displayed on the operation panel.

- f. Press the [+] key or [-] key to select “\*\*>2: Adjust Print>”.

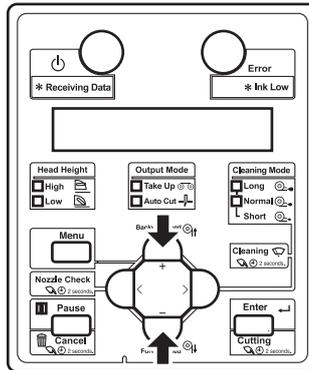


- g. Press the [>] key on the operation panel.

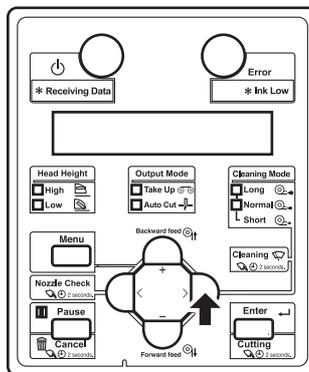


- “Thickness 170  $\mu\text{m}$ ” is displayed on the operation panel. (The default is set to 170  $\mu\text{m}$ . If the default value has been changed, the changed value is displayed.)
- h. Press the [+] key or [-] key and enter the thickness of the paper to use in the range of 80  $\mu\text{m}$  to 1,300  $\mu\text{m}$ .
- This setting is the same as “Media thickness menu”.


 **5.1.1.1.9 Media thickness menu**

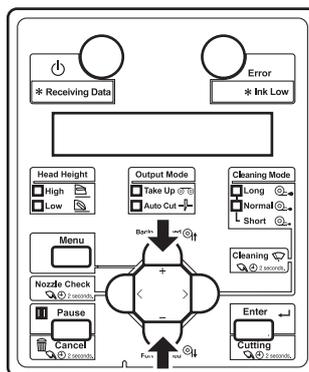


- i. Press the [Enter] key on the operation panel.

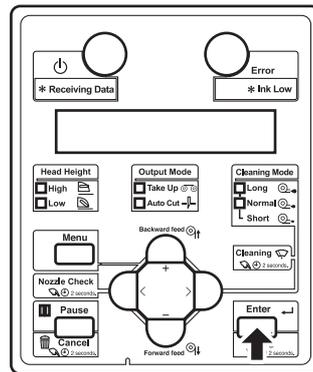

- Media thickness value is set.
  - “Adj.Print1: Auto” is displayed on the operation panel.
- j. Press the [+] key or [-] key to select “Adj.Print2: Standard”.

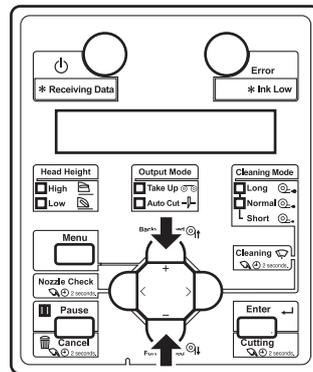


- k. Press the [Enter] key on the operation panel.

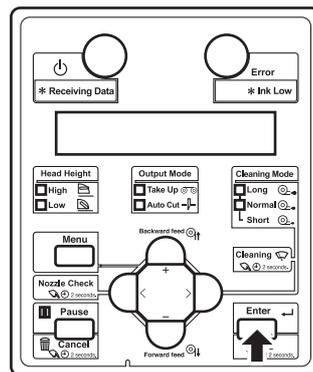

- “Adj.1: Confirm Ptn.” is displayed on the operation panel.
- The display enters the Adjust Print menu.

#### 5.1.1.1.3 Adjust Print menu

3. Press the [Enter] key on the Operation panel.

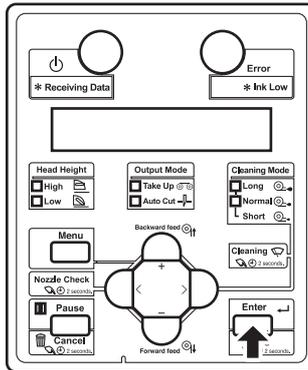

- “Warming Up Skip ->E” is displayed on Operation panel.


**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**



- You can start printing during warming up.  
[🔗 4.4.8 Start Printing during Warm up](#)

- A confirmation pattern for print quality adjustment is printed.  
 (Starts printing after warming up is complete.)

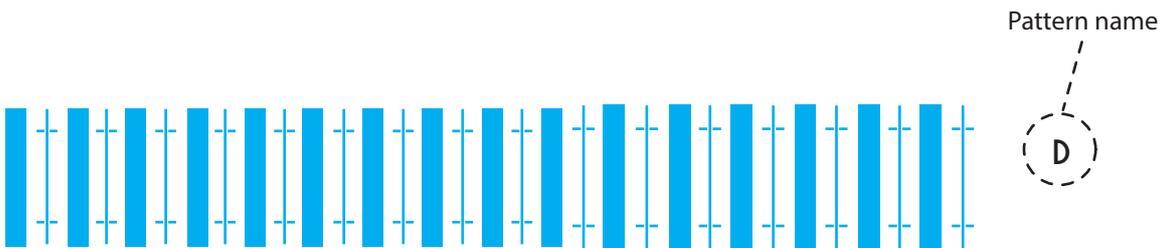

- After the confirmation pattern is printed, Operation panel returns to “Adj. 1: Confirm Ptn”.

4. Confirm that the confirmation pattern printing result is as follows.

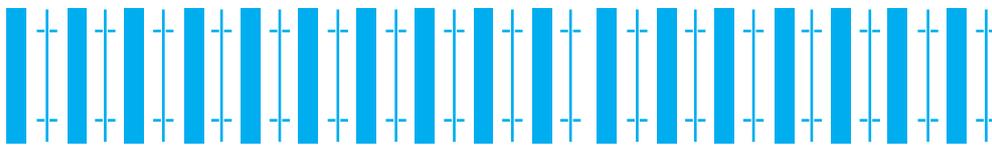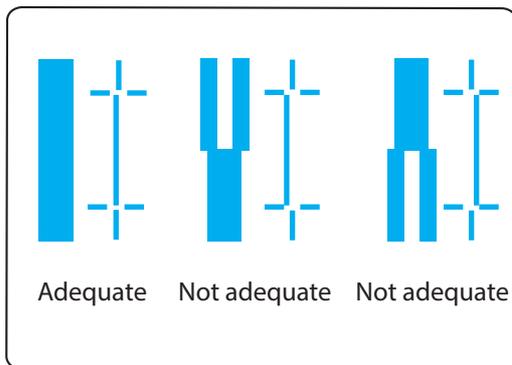


D

- a. When the printing result is Adequate;  
You do not need perform print quality adjustment.  
The procedure for print quality adjustment is complete.
- b. When the printing result is Not adequate;  
You need to perform print quality adjustment.
  - Perform rough adjustment when the misalignment is large.  
👉 [3.6.3.2 Standard Rough Adjustment Pattern](#)
  - Perform micro adjustment when the misalignment is small.  
👉 [3.6.3.3 Standard Micro Adjustment Pattern](#)


### 3.6.3.2 Standard Rough Adjustment Pattern

Perform rough adjustment when the degree of misalignment is large.  
Print rough adjustment pattern and register the set values.

1. Display the Standard Adjust Print menu on Operation panel in the same way as step 2 of “3.6.3.1 Standard Confirmation Pattern”.
2. Press the [+] key or [-] key to select “Adj.2: Rough Pattern”.

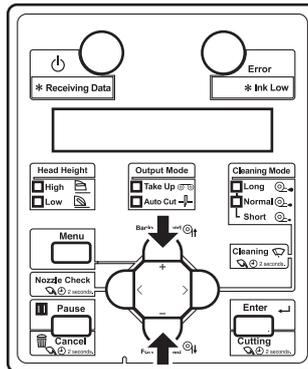

3. Press the [Enter] key on the operation panel.

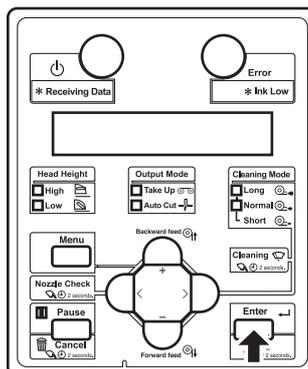

- “Warming Up Skip ->E” is displayed on Operation panel.


#### **CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.


#### **NOTE**

- You can start printing during warming up.  
 [4.4.8 Start Printing during Warm up](#)

- A rough adjustment pattern is printed.  
(The printer starts printing after warming up is complete.)

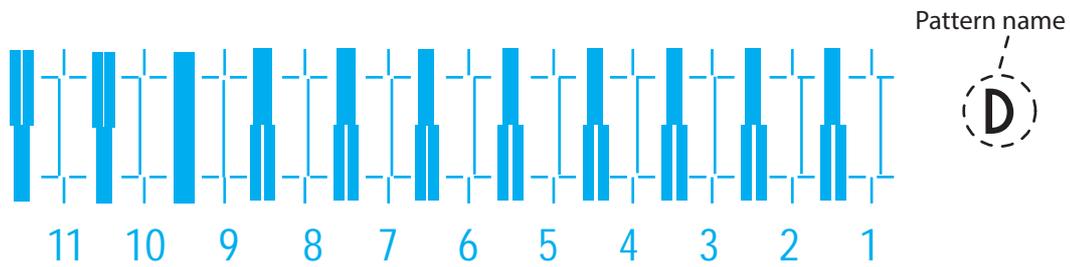

- For the rough adjustment pattern, the same patterns will be printed on both sides and center of the media.
4. Check the both ends and the center of the print result that printed with Adjust pattern, and select the number from 1 to 11 that is not out of alignment.
- “9” is selected in the next printing sample.

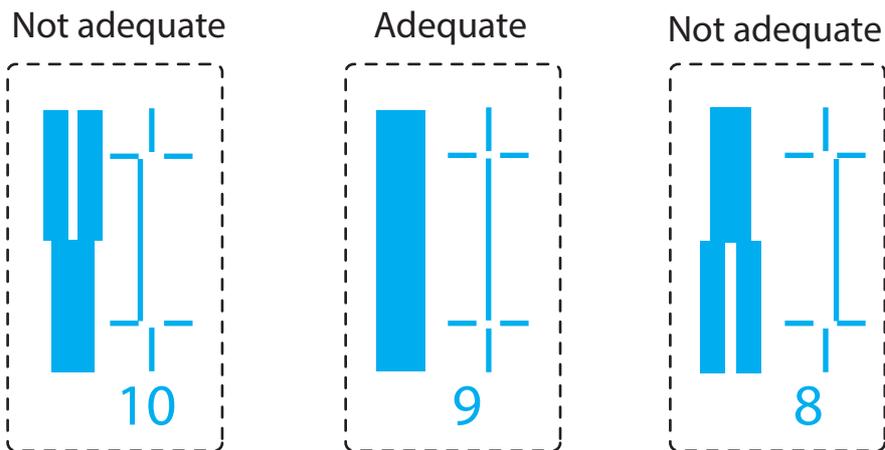

**NOTE**

- “6” is the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line in the middle.


- “Pattern \*: 6” (\* indicates a pattern name as shown below) is displayed on the operation panel.
- The print modes and their pattern names are as follows.

PrintMode	PatternName
High Quality	D
Quality	D
Production	D
High Speed	D

**NOTE**

- Refer to the following for Print mode.  
 [5.1.1.1.1 Print Mode menu](#)


5. Press the [+] key or [-] key to enter the number that you selected in Step 4.

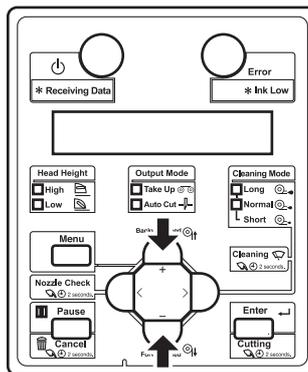

**NOTE**

- When you press the [Cancel] key, the input operation is not executed and “Adj.2: Rough Pattern” is displayed on the operation panel.

6. Press the [Enter] key on the operation panel.

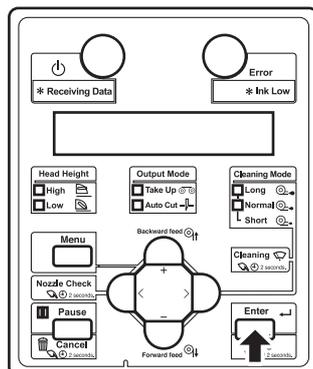


- Determines the setting.
- “Adj.2: Rough Pattern” is displayed on Operation panel.


### 3.6.3.3 Standard Micro Adjustment Pattern

Perform micro adjustment when the degree of misalignment is small.  
Print micro adjustment pattern and register the set values.

1. Display the Standard Adjust Print menu on Operation panel in the same way as step 2 of “3.6.3.1 Standard Confirmation Pattern”.
2. Press the [+] key or [-] key to select “Adj.3: Fine Pattern”.

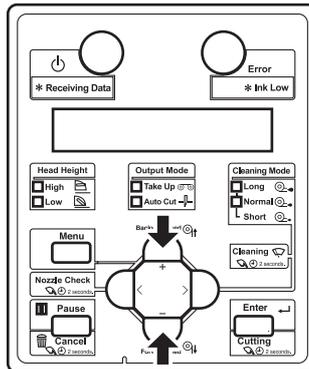

3. Press the [Enter] key on the operation panel.

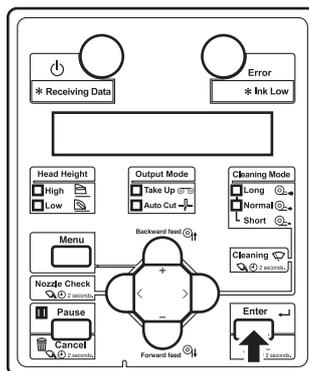

- “Warming Up Skip ->E” is displayed on Operation panel.


#### **CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.


#### **NOTE**

- You can start printing during warming up.  
👉 [4.4.8 Start Printing during Warm up](#)

- An micro adjust print pattern is printed.  
(Starts printing after warming up is complete.)

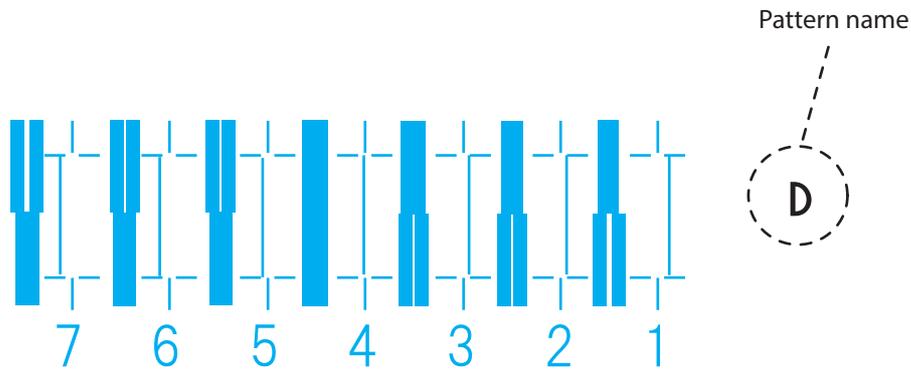

- For the micro adjustment pattern, the same patterns will be printed on both sides and center of the media.
4. Check the both ends and the center of the print result that printed with Adjust pattern, and select the number from 1 to 7 that is not out of alignment.
- “6” is selected in the next printing sample.

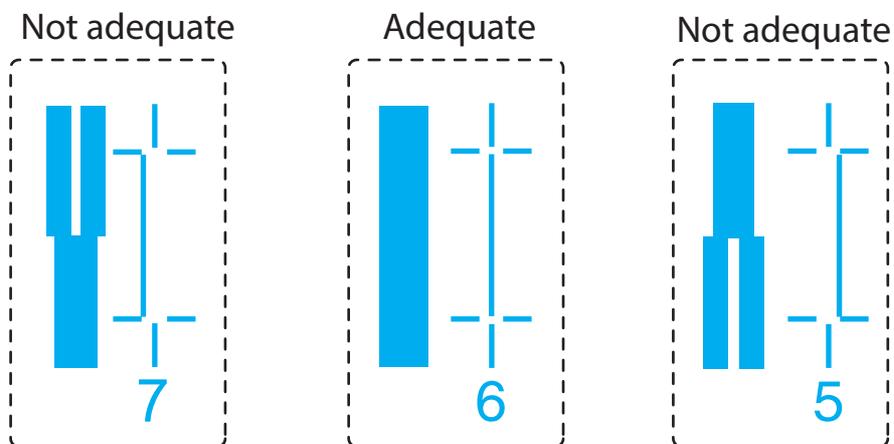

**NOTE**

- “4” is the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line in the middle.

- “Pattern \*: 4” (\* indicates a pattern name as shown below) is displayed on the operation panel.
- The print modes and their pattern names are as follows.


PrintMode	PatternName
High Quality	D
Quality	D
Production	D
High Speed	D

**NOTE**

- Refer to the following for Print mode.

 [5.1.1.1.1 Print Mode menu](#)


5. Press the [+] key or [-] key to enter the number that you selected in Step 4.

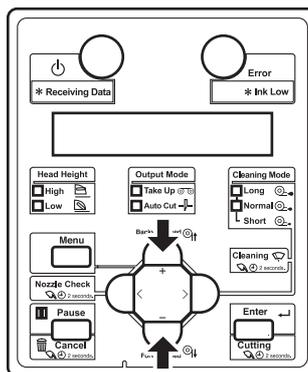

**NOTE**

- When you press the [Cancel] key on Operation panel, the display returns to “Adj.3: Fine Pattern”.

6. Press the [Enter] key on the operation panel.

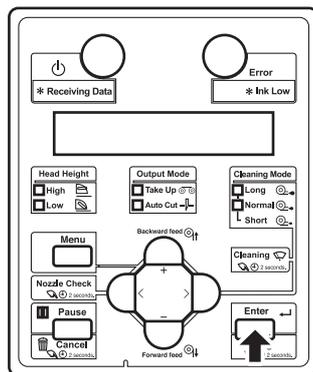

- Determines the setting.
- “Adj.3: Fine Pattern” is displayed on Operation panel.

### 3.6.4 Custom Adjustment Pattern

Perform adjustment for all patterns (A to F).

All print modes will be adjusted.

This menu consists of the following menus.

Menu Name		Description	Reference
Custom confirmation pattern		Print out the confirmation patterns (A to F) and check the degree of misalignment.	 <a href="#">3.6.4.1 Custom Confirmation Pattern</a>
Custom rough adjustment pattern	Rough PatternALL	Perform this when the degree of misalignment is large. All confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.2.1 Rough Pattern ALL</a>
	Individual Rough Adj. pattern	Perform this when the degree of misalignment is large. One of the confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.2.2 Rough Pattern A to F</a>
Custom micro adjustment pattern	Adj. PatternALL	Perform this when the degree of misalignment is small. All confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.3.1 Fine Pattern ALL</a>
	Individual Adj. pattern	Perform this when the degree of misalignment is small. One of the confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.3.2 Fine Pattern A to F</a>

Follow the procedure below to adjust print quality.

1. Print the confirmation pattern and check the amount of misalignment.

 [3.6.4.1 Custom Confirmation Pattern](#)

2. Perform rough adjustment when the misalignment is large.

 [3.6.4.2 Custom Rough Adjustment Pattern](#)

Perform micro adjustment when the misalignment is small.

 [3.6.4.3 Custom Micro Adjustment Pattern](#)

#### NOTE

- Perform rough adjustment first when the degree of misalignment is difficult to determine.
- Perform adjustment for A to F patterns if they are misaligned.

3. Print the confirmation pattern and check if the printer is adjusted properly.

 [3.6.4.1 Custom Confirmation Pattern](#)

- If the printer is not adjusted, go back to Step 2.

### NOTE

- Perform micro adjustment if the printer is not fully adjusted after rough adjustment.
- In adjustment patterns, there are Adjust pattern ALL where all patterns will be adjusted and Individual Adj. pattern where the patterns A to F can be adjusted individually.


 **3.6.4.3.1 Fine Pattern ALL**

 **3.6.4.3.2 Fine Pattern A to F**

### 3.6.4.1 Custom Confirmation Pattern


Using this menu, you can print out all of the confirmation patterns (A to F) and check the degree of misalignment.

- Turn ON the printer and load the roll media.
  -  **3.4.2 Setting Roll Media**
- Display the Adjust Print menu on the operation panel.
  - Press the [Menu] key on the operation panel.

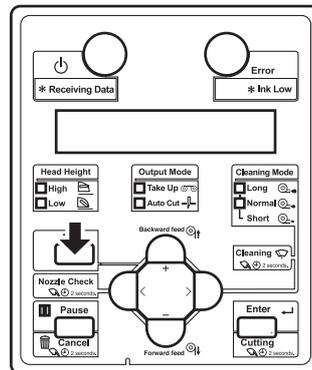


- "Menu1: Setup>" is displayed on the operation panel.

- b. Press the [>] key on the Operation panel.

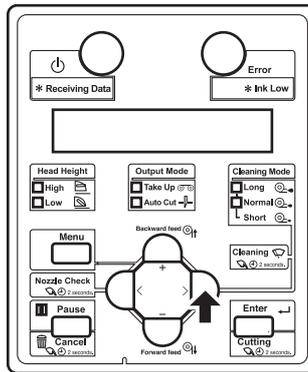


- “Set1: User Type” is displayed on the operation panel.

- c. Press the [Enter] key on the Operation panel.

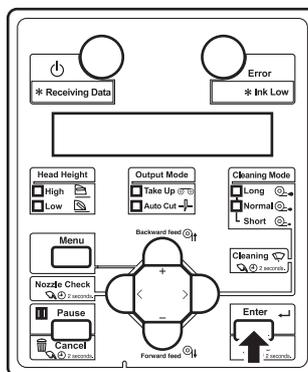


- “User: TypeXX” (XX is a number between 1 and 15) is displayed on the operation panel.


- d. Press the [+] key or [-] key on Operation panel to select the user type setting.

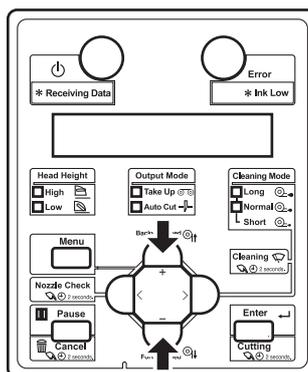


- e. Press the [Enter] key on the operation panel.

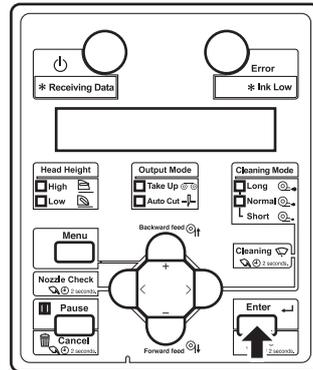

- “\*\*>1: Print Mode” is displayed on the operation panel.
- f. Press the [+] key or [-] key to select “\*\*>2: Adjust Print>”.

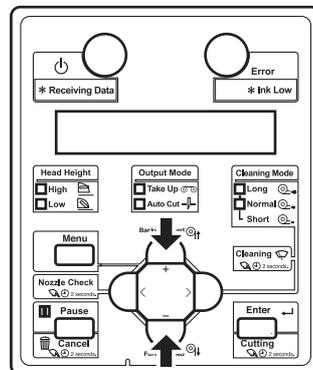

- g. Press the [>] key on the operation panel.

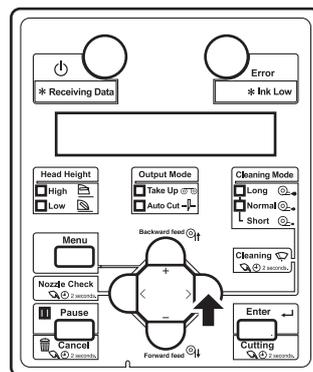


- “Thickness 170  $\mu\text{m}$ ” is displayed on the operation panel. (The default is set to 170  $\mu\text{m}$ . If the default value has been changed, the changed value is displayed.)


- h. Press the [+] key or [-] key and enter the thickness of the paper to use in the range of 80 μm to 1,300 μm.

- This setting is the same as “Media thickness menu”.

 **5.1.1.1.9 Media thickness menu**

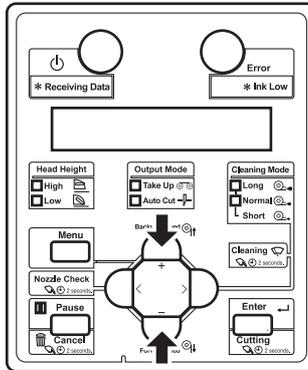


- i. Press the [Enter] key on the operation panel.

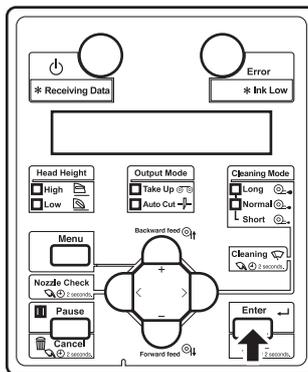


- Media thickness value is set.
- “Adj.Print1: Auto” is displayed on the operation panel.

- j. Press the [+] key or [-] key to select “Adj.Print3: Custom”.

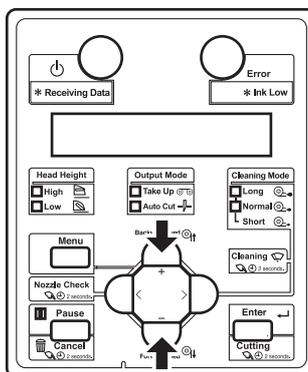


- k. Press the [Enter] key on the operation panel.

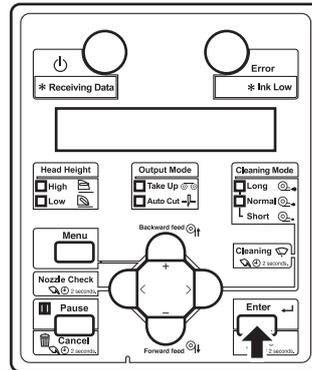

- “Adj.1: Confirm Ptn.” is displayed on the operation panel.
- The display enters the Adjust Print menu.

**5.1.1.1.3 Adjust Print menu**

3. Press the [Enter] key on the operation panel.

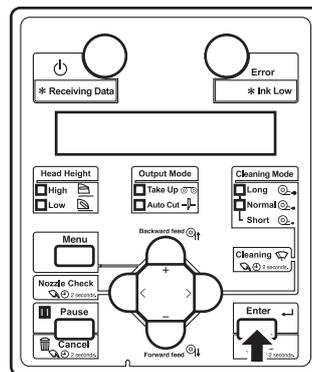

- “Warming Up Skip ->E” is displayed on Operation panel.

**CAUTION**


- **While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.**

**NOTE**

- You can start printing during warming up.  
 **4.4.8 Start Printing during Warm up**

- A confirmation pattern for print quality adjustment is printed.  
(Starts printing after warming up is complete.)


- Six confirmation patterns of A to F will be printed.

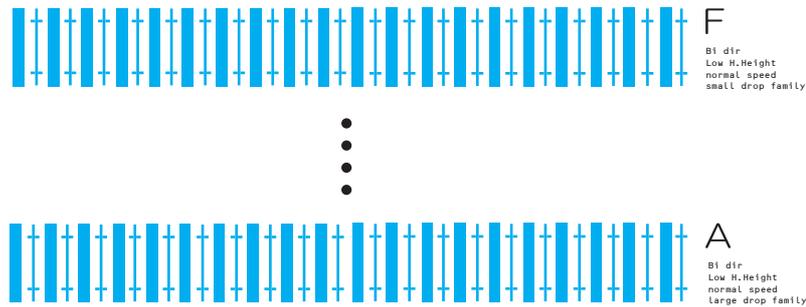

- After the confirmation pattern is printed, Operation panel returns to “Adj.1: Confirm Ptn.”.

4. Confirm that the confirmation pattern printing result is as follows.

- Check each of the confirmation patterns A to F.

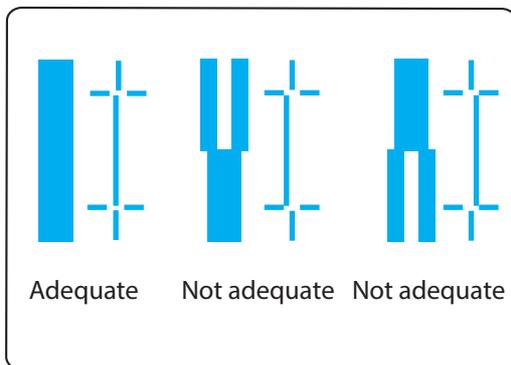

- When the printing result is Adequate;  
You do not need perform print quality adjustment.  
The procedure for print quality adjustment is complete.
- When the printing result is Not adequate;  
You need to perform print quality adjustment.
  - Perform rough adjustment when the misalignment is large.  
🔗 [3.6.4.2 Custom Rough Adjustment Pattern](#)
  - Perform micro adjustment when the misalignment is small.
    - When all patterns A to F require adjustment: 🔗 [3.6.4.3.1 Fine Pattern ALL](#)
    - When any pattern of A to F requires adjustment: 🔗 [3.6.4.3.2 Fine Pattern A to F](#)


### 3.6.4.2 Custom Rough Adjustment Pattern

Perform micro adjustment when the degree of misalignment is large.  
This menu consists of the following menus.


Menu name	Description	Reference
Custom rough adjustment pattern	Rough Pattern ALL	All confirmation patterns (A to F) will be adjusted.  <a href="#">3.6.4.2.1 Rough Pattern ALL</a>
	Rough Pattern A to F	One of the confirmation patterns (A to F) will be adjusted.  <a href="#">3.6.4.2.2 Rough Pattern A to F</a>

#### 3.6.4.2.1 Rough Pattern ALL

1. Display the Custom Adjust Print menu on Operation panel in the same way as Step 2 of “[3.6.4.1 Custom Confirmation Pattern](#)”.
2. Press the [+] key or [-] key on Operation panel to select “Adj.2: RoughPtn. ALL”.

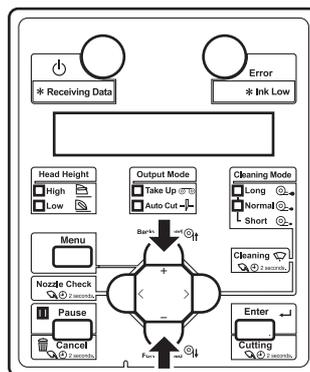

3. Press the [Enter] key on Operation panel.

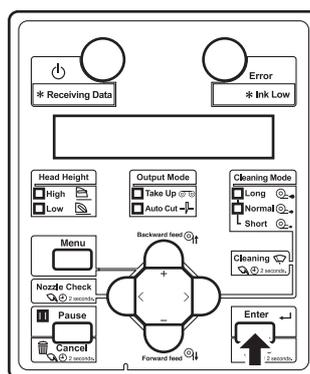

- “Warming Up Skip ->E” is displayed on Operation panel.


**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**


- You can start printing during warming up.  
 **4.4.8 Start Printing during Warm up**

- Starts a rough adjustment pattern printing.  
 (Starts printing after warming up is complete.)

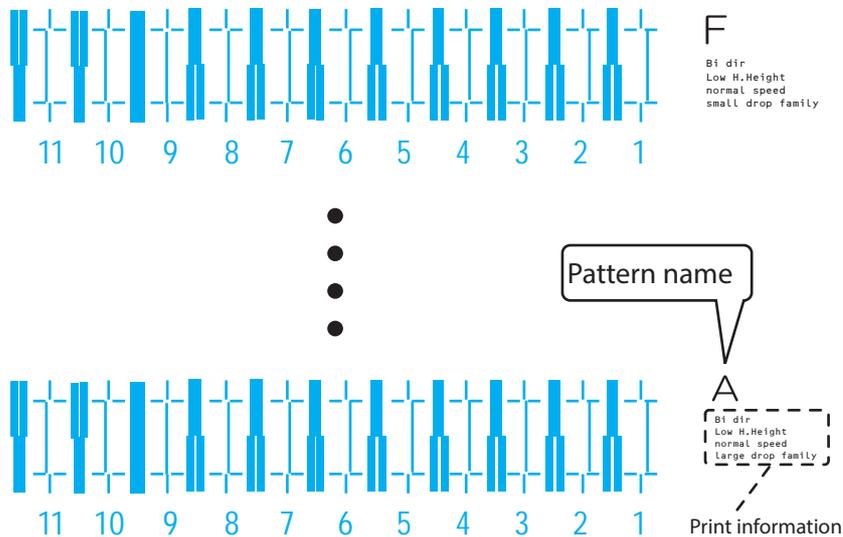

- For the rough adjustment pattern, the same patterns will be printed on both sides and center of the media.
- 6 rough adjustment patterns (A to F) are printed. Enter the adjusted values.


4. Check the both ends and the center of the print result that printed with Adjust pattern, and select the number from 1 to 11 that is not out of alignment.
  - “9” is selected in the following pattern.

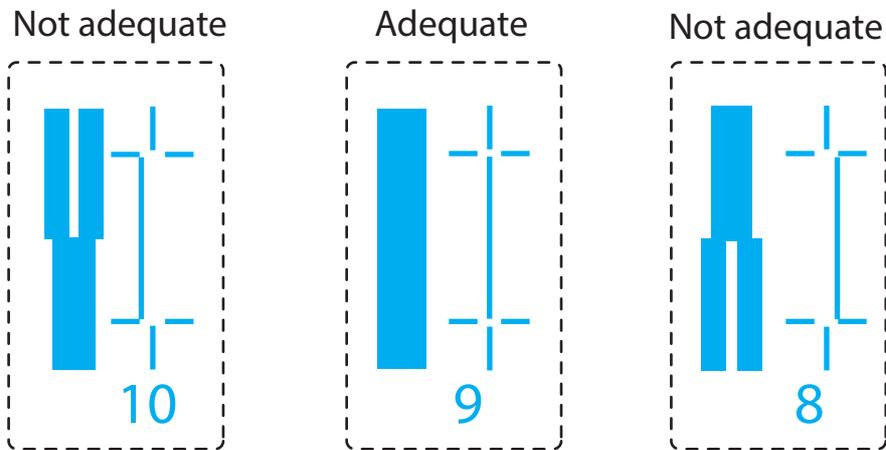**NOTE**

- “6” is the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line in the middle.


- “PatternA: 6” is displayed on the operation panel.

5. Press the [+] key or [-] key to enter the number that you selected in Step 4.

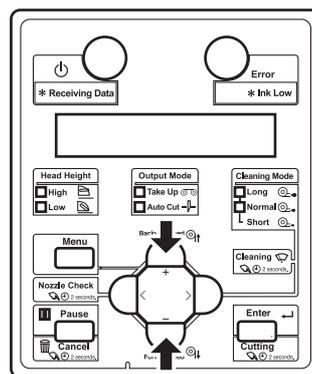**NOTE**

- When you press the [Cancel] key on Operation panel, the setting value is not entered and the display returns to “Adj.2: RoughPtn. ALL”.

- Press the [Enter] key on the operation panel.

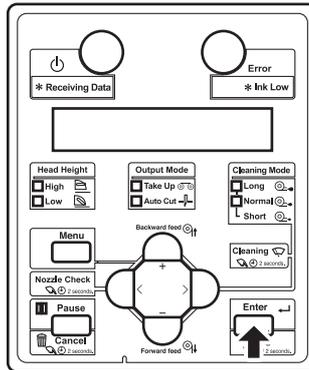


- Determines the setting.
- Enter the values for patterns B to F in the same way.
    - Press the [Enter] key to set the values.
    - Once all set values have been entered, press the [Enter] key to register the set values of “Pattern A” to “Pattern F” to the printer.
    - “Adj.2: RoughPtn. ALL” is displayed on Operation panel.


### 3.6.4.2.2 Rough Pattern A to F

Print one adjustment pattern from A to F and register the set value.  
The following describes how to adjust pattern A only.

- Display the Custom Adjust Print menu on Operation panel in the same way as Step 2 of [3.6.4.1 Custom Confirmation Pattern](#).
- Press the [+] key or [-] key on Operation panel to select “Adj.3: RoughPattern A”.

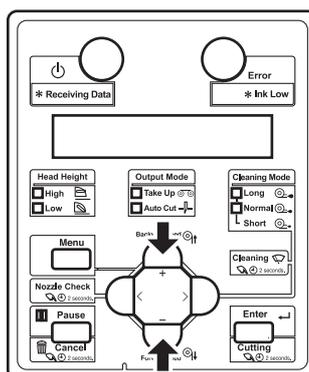

3. Press the [Enter] key on Operation panel.

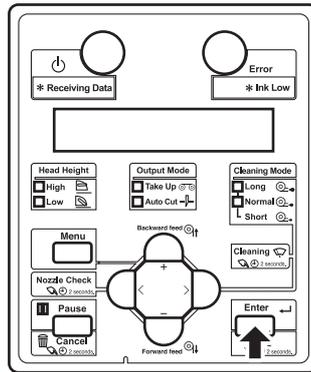

- “Warming Up Skip ->E” is displayed on Operation panel.


**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**


- You can start printing during warming up.  
 ⓘ **4.4.8 Start Printing during Warm up**

- A rough adjust print pattern is printed.  
 (Starts printing after warming up is complete.)

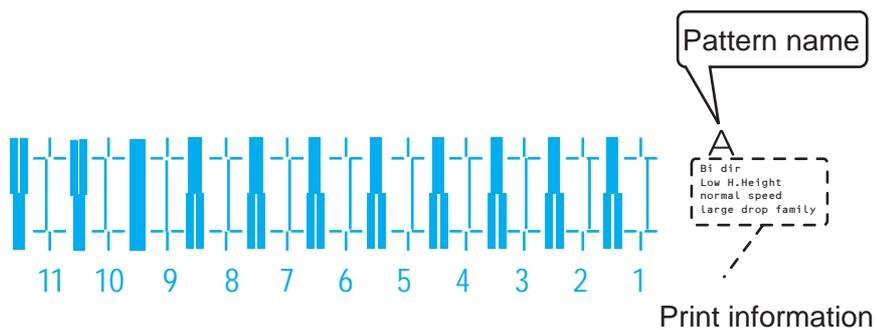

- For the Adjust print pattern, the same patterns will be printed repeatedly on both sides and center of the media.

4. Check the print results on both sides and center of the media and select the number that looks most aligned between 1 and 11.
  - “9” is selected in the next printing sample.

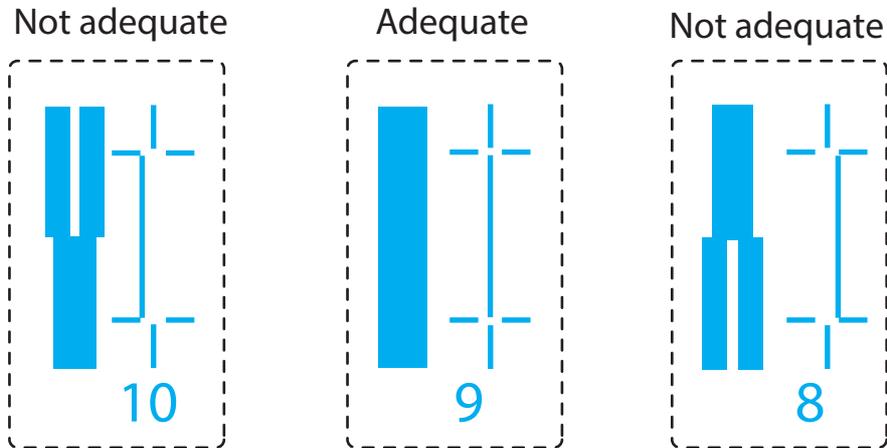


**NOTE**

- “6” represents the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line.

- “PatternA: 6” is displayed on Operation panel.


5. Press the [+] key or [-] key on Operation panel to enter the number that you selected in Step 4.

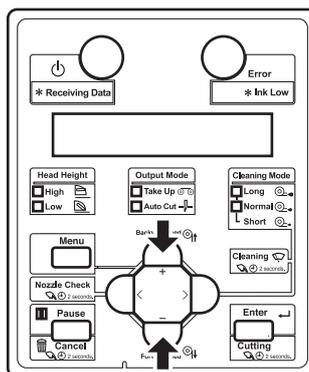

**NOTE**

- When you press the [Cancel] key on Operation panel, the display returns to “Adj.3: RoughPatternA”.

6. Press the [Enter] key on Operation panel.

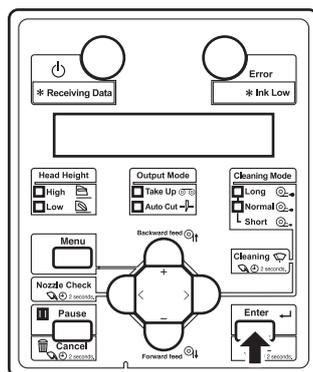

- Determines the setting.
- “Adj.3: RoughPatternA” is displayed on Operation panel.

### 3.6.4.3 Custom Micro Adjustment Pattern


Perform micro adjustment when the degree of misalignment is small.  
This menu consists of the following menus.

Menu Name		Description	Reference
Custom Micro Adjustment Pattern	Fine PatternALL	All confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.3.1 Fine Pattern ALL</a>
	Fine Pattern A to F	One of the confirmation patterns (A to F) will be adjusted.	 <a href="#">3.6.4.3.2 Fine Pattern A to F</a>


#### 3.6.4.3.1 Fine Pattern ALL

Print micro adjustment pattern ALL and register the set values.

1. Display the Custom Adjust Print menu on the operation panel in the same way as in step 2 of “[3.6.4.1 Custom Confirmation Pattern](#)”.
2. Press the [+] key or [-] key on Operation panel to select “Adj.9: Fine Ptn. ALL”.

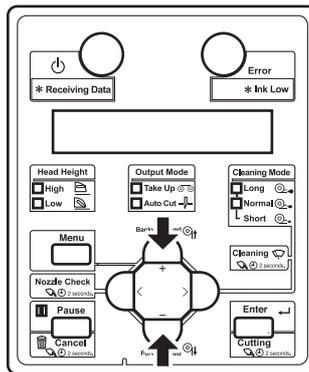

3. Press the [Enter] key on the operation panel.

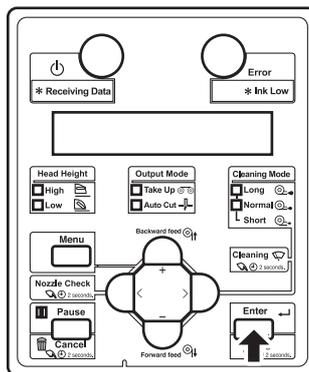

- “Warming Up Skip ->E” is displayed on Operation panel.


**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**


- You can start printing during warming up.  
 🖨️ **4.4.8 Start Printing during Warm up**

- An adjust print pattern is printed.  
 For Adjust print pattern printing, 6 adjust print patterns (A to F) are printed. Enter the adjusted values.  
 (Starts printing after warming up is complete.)

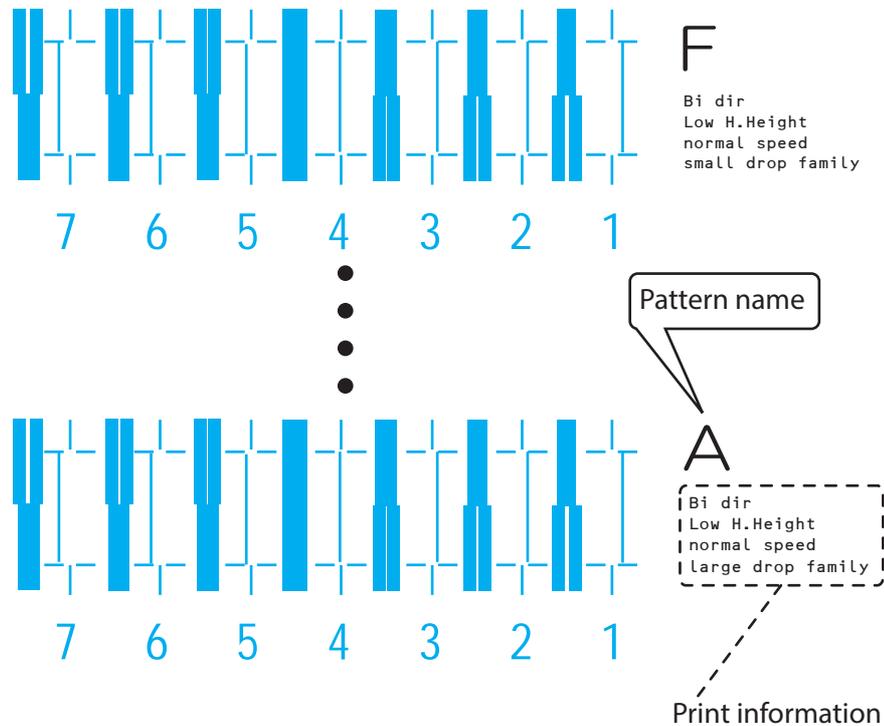

- For the Adjust print pattern, the same patterns will be printed repeatedly on both sides and center of the media.

4. Check the print results on both sides and center of the media and select the number that looks most aligned between 1 and 7.
  - “6” is selected in the following pattern.

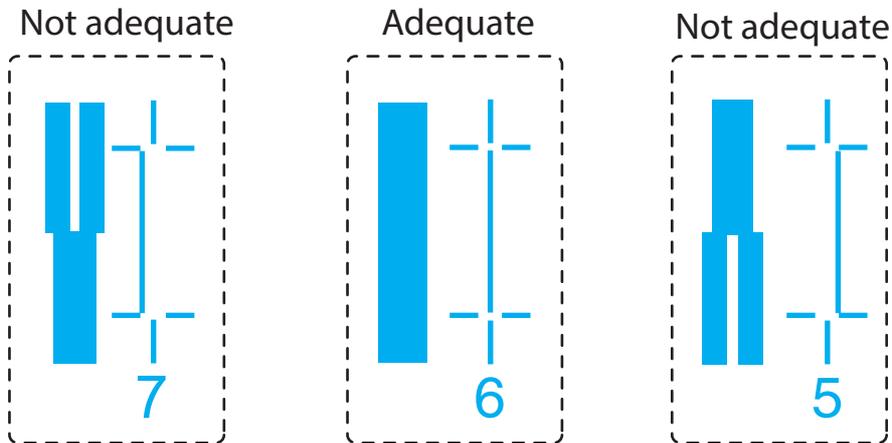


**NOTE**

- “4” represents the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line in the middle.

- “PatternA: 4” is displayed on the operation panel.


5. Press the [+] key or [-] key to enter the number that you selected in Step 4.

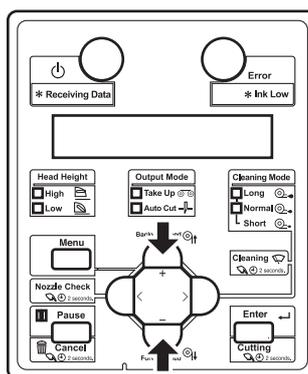

**NOTE**

- When you press the [Cancel] key, the input operation is not executed and “Adj.9: Fine Ptn. ALL” is displayed on the operation panel.

6. Press the [Enter] key on the operation panel.

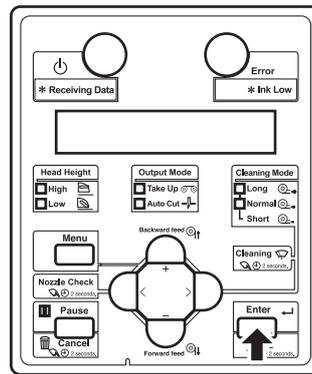


- Determines the setting.
7. Enter the values for patterns B to F in the same way.
- Press the [Enter] key to set the value.
  - Once all set values have been entered, press the [Enter] key to register the set values of patterns A to F.
  - “Adj.9: Fine Ptn. ALL” is displayed on Operation panel.


### 3.6.4.3.2 Fine Pattern A to F

Print one adjustment pattern from A to F and register the set value.  
The following describes how to adjust pattern A only.

1. Display the Custom Adjust Print menu on Operation panel in the same way as Step 2 of “3.6.4.1 Custom Confirmation Pattern”.
2. Press the [+] key or [-] key on Operation panel to select “Adj.10: Fine PatternA”.

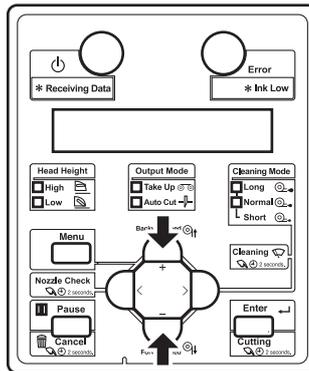

3. Press the [Enter] key on the operation panel.

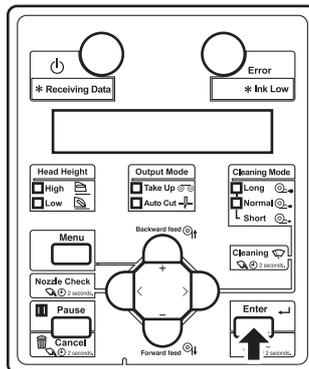

- “Warming Up Skip ->E” is displayed on Operation panel.


#### **CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.


#### **NOTE**

- You can start printing during warming up.  
👉 [4.4.8 Start Printing during Warm up](#)

- An micro adjust print pattern is printed.  
(Starts printing after warming up is complete.)

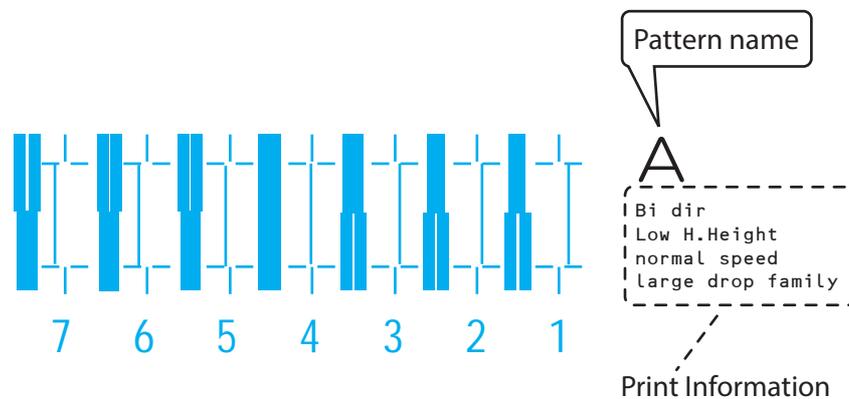

- For the Adjust print pattern, the same patterns will be printed repeatedly on both sides and center of the media.
4. Check the print results on both sides and center of the media and select the number that looks most aligned between 1 and 7.
- “6” is selected in the next printing sample.

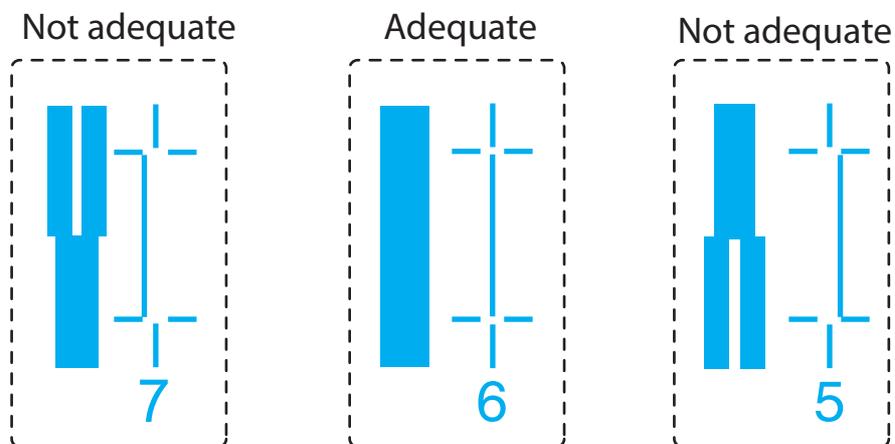


#### NOTE

- “4” represents the current setting value.
- When the line is aligned, the bold line on its left side does not have a white vertical line.

- “PatternA: 4” is displayed on Operation panel.


5. Press the [+] key or [-] key on Operation panel to enter the number that you selected in Step 4.

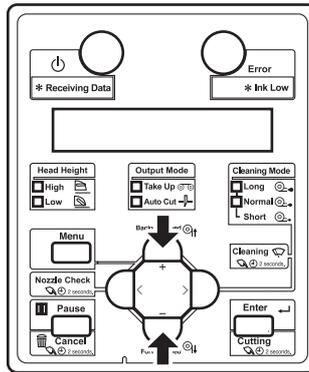

### NOTE

- When you press the [Cancel] key on Operation panel, the display returns to “Adj10: Fine PatternA”.

6. Press the [Enter] key on Operation panel.

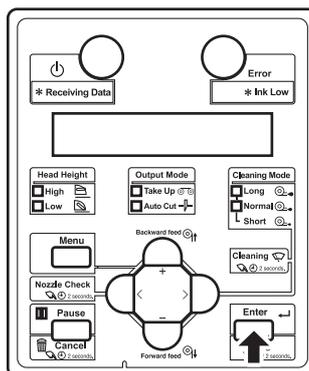

- Determines the setting.
- “Adj. 10: Fine PatternA” is displayed on Operation panel.

## 3.7 Connecting the printer to your PC

This section explains how to connect the printer and a PC.

### 3.7.1 System requirements

The following are the system requirements for this printer.

Operating system	Windows 11, Windows 10, Windows 8.1
------------------	-------------------------------------

#### NOTE

- The required memory varies depending on the application software or the print data type.
- A large hard disk and memory are recommended.

### 3.7.2 Preparing cables

The printer is equipped with a network interface for connecting with a PC.

You need a network interface cable to connect a PC with this printer.

Prepare the cable depending on the PC that it will be connected to.

An ethernet crossover cable should have been supplied with your printer purchase.s

#### TIP


- About connecting a network interface cable, refer to “[3.7.3 Connecting a network interface cable](#)”.
- For the recommended cable specifications, refer to “[8.2 Interface specification](#)”.

### 3.7.3 Connecting a network interface cable

This section explains how to connect a network interface cable.


Follow the procedure below to connect this printer to your PC.

1. Turn OFF both the printer and PC.
2. Insert the network interface cable into the network interface connector located on the back of the printer.

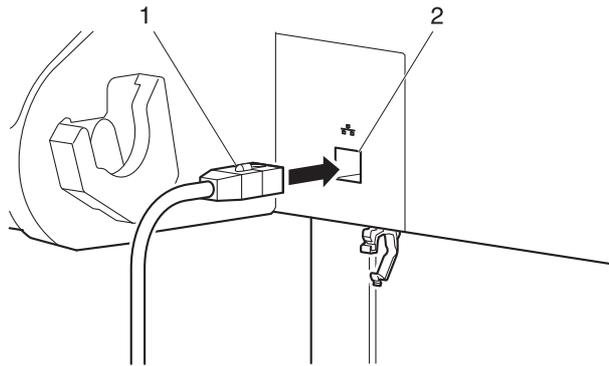

No.	Name
1	Network interface cable
2	Network interface cable connector

3. Fix the network interface cable to the cable clamp.

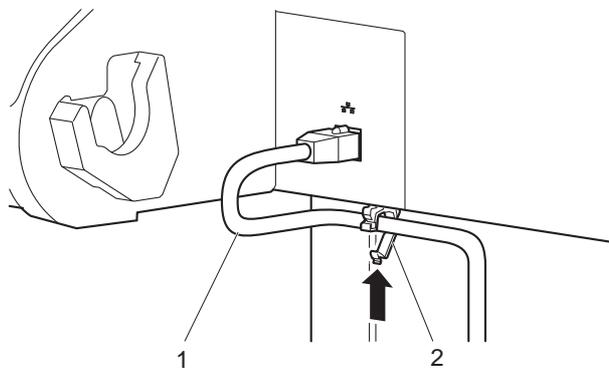

No.	Name
1	Network interface cable
2	Cable clamp

4. Connect the other connector of the network interface cable to your PC.

**TIP**


- About connecting to your PC, refer to the operation manual included with the PC.
- For network setting on the side of the printer, refer to “[4.3.2 Panel setup menu overview](#)”.

## 4 Handling the printer

This chapter explains how to handle the printer.

## 4.1 Print flow chart

The following flow chart illustrates the procedure to perform printing with the printer. Refer to each section as required.

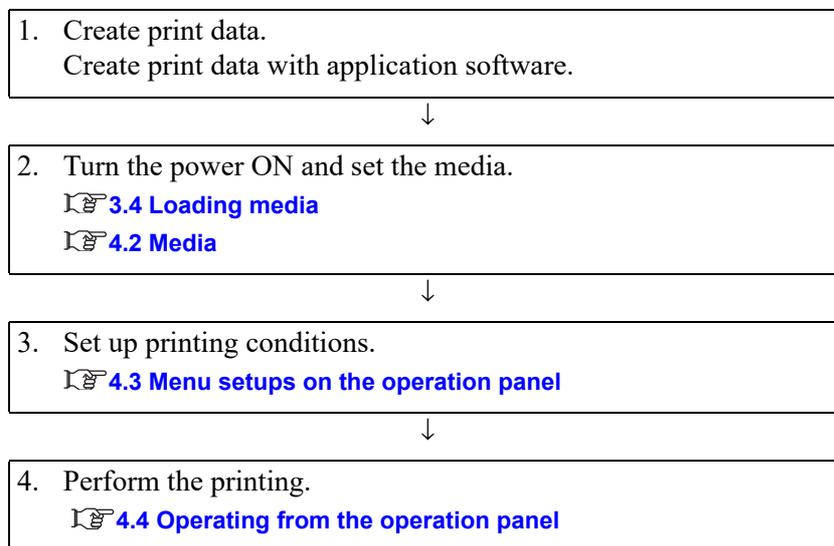

### WARNING

- Do not place any combustible materials on the platen while the heater is working. There may be a risk of fire.
- Do not spill flammable liquid on the platen. This could lead to a fire.

### CAUTION

- Do not touch the media guide while printing. The media guide becomes very hot and you could burn yourself.
- Do not touch the media feed slot, platen, and media guide while the heater is working. The media feed slot, platen, and media guide become very hot and you could burn yourself.
- Ventilate the workplace. Not doing so may make you feel sick or may lead to a fire.

### NOTE

Do not open the front cover and maintenance cover during printing. If the front cover/maintenance cover is opened, printing will be interrupted. Printing restarts if you close the front cover/maintenance cover. However, the result of your print is not guaranteed.

## 4.2 Media

This section explains details of available media for this printer.

### 4.2.1 Media type

The type and quality of media greatly influence the print result. Use media that matches the application, taking the following information into account. Contact your local MUTOH dealer about roll media recommended for your printer.

### 4.2.2 Cautions on handling media

Note the following points when handling the media.

#### NOTE

- Use the media under an appropriate environment.  
The appropriate temperature and humidity for printing are as follows.

	Temperature	Humidity
Guaranteed range of printing accuracy	22 °C to 30 °C	40% to 60%
Change rate	Within 2 °C per hour	Within 5 % per hour

- Do not use media which is folded, cut, or torn.
- The size of media can change according to changes in humidity in the printing environment. Before using media, leave media for 1 hour in the printing environment to adapt it to the environment.  
Performing printing without adapting media to the printing environment may cause media jams due to gaps or wrinkles in the media.  
Print quality is also affected.
- When using the printer in a low-humidity environment, the cut media may stuck and may not come down. In such a case, open the front cover after the media is cut to remove the media.
- Do not touch the print side.  
Moisture and oil on your hands may affect the print quality.
- Do not leave media set in the printer for a long time.  
Some media has a tendency to bend, causing media jams and degradation of print quality. Avoid using such media especially in winter, in dry conditions, and when printing formal documents.
- Do not discard the individual box and bag. Use them for storing media.

### 4.2.3 Precaution on storing media after use


When storing roll media after use, follow these precautions to avoid print defects caused by cockling.

#### NOTE

- After removing your roll media from the scroller, wind it back onto the roll properly and put it in the original plastic bag. Then store it in the package it came in.
- Avoid high temperature, high humidity, and direct sunlight when storing media.
- Keep the media dry.

### 4.2.4 Printing area

The printable area of this printer is as follows.

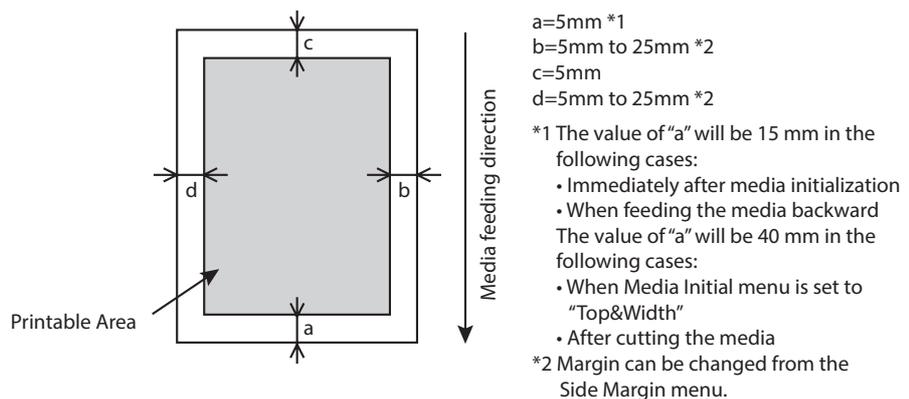

## 4.2.5 Head height adjustment

Printing with high printing rate or using strongly-curved media can cause print heads to rub. Changing the distance from the print head surface to media (head height) may allow you to avoid headrub.

Head height can be changed to three levels.  
Follow the procedure below to change the head height.


### 4.2.5.1 When raising the print head

#### NOTE

- If the head height adjustment lever is raised, high print quality is not guaranteed.
- Do not open the front cover or change the head height during printing.  
If the head height is changed, the alignment will be changed and high print quality will not be guaranteed.
- After you change the head height, make sure to perform the print quality calibration.


➤ [3.6 Adjust Print](#)

1. Open the front cover.

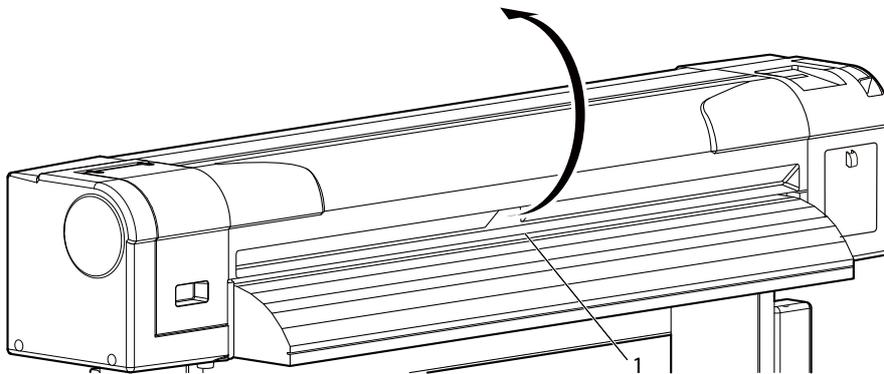

No.	Name
1	Front cover


2. Change the head height by moving the head height adjustment lever (orange).

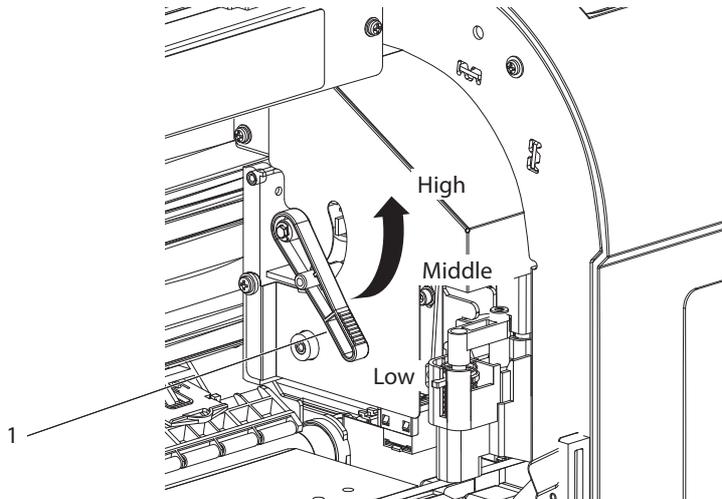

No.	Name
1	Head height adjustment lever

- High: The highest head height setting.  
The High lamp on the operation panel lights up in green, and Low lamp lights off.
- Middle: Use this option for media between 0.3 mm to 0.8 mm thick or when the head strikes occurs with Low1 setting.  
The High lamp and Low lamp on the operation panel lights up in green.
- Low: Default head height. The lowest head height setting.  
The Low lamp on the operation panel lights up in green, and High lamp lights off.

3. Close the front cover.

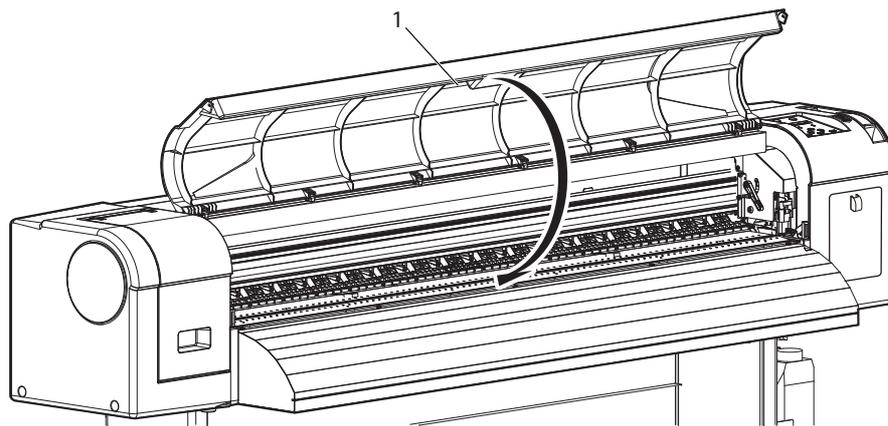

No.	Name
1	Front cover


#### 4.2.5.2 When returning the print head to the original position

**NOTE**

- Do not open the front cover or change the head height during printing.  
If the head height is changed, the alignment will be changed and high print quality will not be guaranteed.
- After you change the head height, make sure to perform the print quality calibration.


👉 [3.6 Adjust Print](#)

1. Open the front cover.

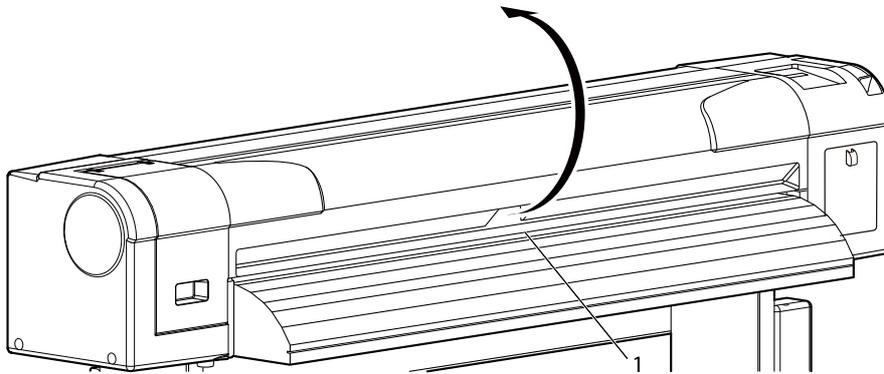

No.	Name
1	Front cover


2. Change the head height by moving the head height adjustment lever (orange).

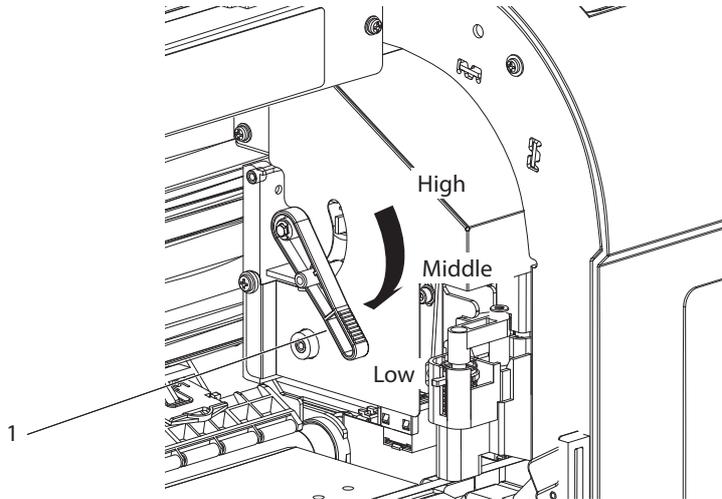

No.	Name
1	Head height adjustment lever

- High: The highest head height setting.  
The High lamp on the operation panel lights up in green, and Low lamp lights off.
- Middle: Use this option for media between 0.3 mm to 0.8 mm thick or when the head strikes occurs with Low1 setting.  
The High lamp and Low lamp on the operation panel lights up in green.
- Low: Default head height. The lowest head height setting.  
The Low lamp on the operation panel lights up in green, and High lamp lights off.

3. Close the front cover.

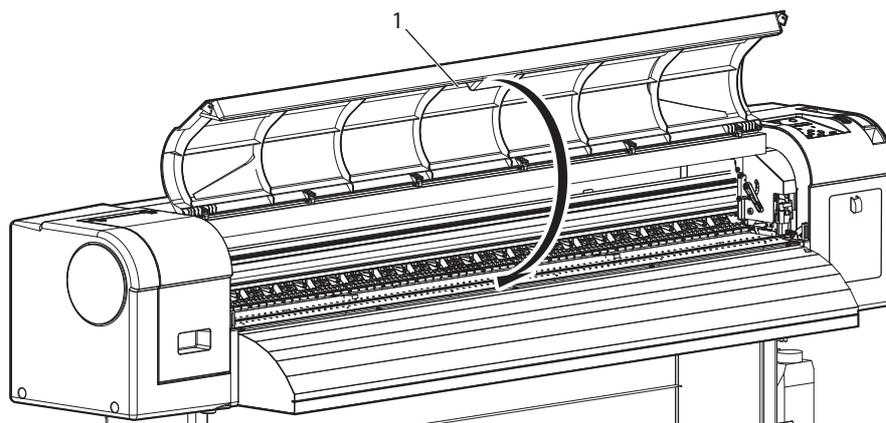

No.	Name
1	Front cover

## 4.2.6 Media feed adjustment

This section explains the Media feed adjustment.

The feeding length depends on the media type. The following or similar results may be seen in prints.

- Printed images overlap.
- White lines are printed on images.

The accuracy of media feeding may be improved with the following methods.

1. Display the Dist.Adj menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.
    - “Menu1: Setup>” is displayed on the operation panel.
    - The operation panel shifts to the Setup menu display.
  - b. Press the [>] key on the operation panel.
    - “Set1: User Type” is displayed on the operation panel.
  - c. Press the [Enter] key on the operation panel.
    - “User: Type 1” is displayed on the operation panel.
  - d. Press the [+] key or [-] key on the operation panel to select the media type to use.
  - e. Press the [Enter] key on the operation panel.
    - “\*\*>1: Print Mode” is displayed on the operation panel.

### TIP

•The selected media (Type 1 to 15) is displayed in “\*\*”.

 [5.1.1 User Type menu](#)

- f. Press the [+] key or [-] key to select “\*\*>3: PF Adjust>”.
- g. Press the [>] key on the operation panel.
  - “PF1: Auto” is displayed on the operation panel.
  - Proceed to Dist.Adj menu.
    -  [5.1.1.1.4 Dist.Adj menu](#)

**NOTE**

- "PF Adjust" requires at least 15.7 inches (400 mm) printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 15.7", your printer will not print. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

🔗 [5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)

#### 4.2.6.1 Automatic PF adjustment method

1. Press the [+] key or [-] key to select "PF1: Auto".
  - a. Press the [Enter] key on the operation panel.
    - The printer performs an automatically PF adjustment.
    - If the print defect persists after automatic PF adjustment, perform manual PF adjustment.  
🔗 [4.2.6.2 Manual PF adjustment method using adjustment print](#)

#### 4.2.6.2 Manual PF adjustment method using adjustment print

You will need a ruler to perform this adjustment.

1. Press the [+] key or [-] key to select "PF2: Initial Print".
  - a. Press the [Enter] key on the operation panel.
    - "Feed Length: 250 mm" is displayed on the operation panel.

**TIP**

- The length of media that is fed (feeding length) for Initial Print is normally set at 250 mm.
- If you increase the feeding length, the accuracy of the Media feed adjustment improves.  
To change the feeding length, press the [+] key or [-] key on the operation panel and change the set value.

- b. Press the [Enter] key on the operation panel.
  - “Printing” is displayed on the operation panel.
  - Starts Initial Print.



No.	Name
1	Feed length
2	Media feeding direction

- When the Initial Print is complete, the printer enters Normal.
- c. After the Initial Print, the media is cut.
    - ↳ **4.4.4 Cutting media**
2. Measure the distance between the two pluses (+) in the Initial Print using a ruler.
  3. Sets up Initial Adjust Change.
    - a. Press the [+] key or [-] key on the operation panel to select “PF3: Initial Change”.
    - b. Press the [Enter] key on the operation panel.
      - “Init.: 250.0/250 mm” is displayed on the operation panel.
    - c. Press the [+] key or [-] key on the operation panel and enter the measured value in step 2.
    - d. Press the [Enter] key on the operation panel.
      - The initial adjustment value is saved.
      - “PF3: Initial Change” is displayed on the operation panel.
  4. Performs Confirm Print.
    - a. Press the [+] key or [-] key on the operation panel to select “PF4: Confirm Print”.
    - b. Press the [Enter] key on the operation panel.
      - “Feed Length: 250 mm” is displayed on the operation panel.

**TIP**

- The length of media that is fed (feeding length) for Confirm Print is normally set at 250 mm.
- If you increase the feeding length, the accuracy of the Media feed adjustment improves.
- To change the feeding length, press the [+] key or [-] key on the operation panel and change the set value.

c. Press the [Enter] key on the operation panel.

- “Printing” is displayed on the operation panel.
- Starts Confirm Print.



No.	Name
1	Feed length
2	Media feeding direction

- When the Confirm Print is complete, the printer enters Normal.

d. After the Confirm Print, the media is cut.

**4.4.4 Cutting media**

5. Measure the distance between the two pluses in the Confirm Print using a ruler. Then, confirm that the distance matches the feeding length when printing.

- If the distance does not match the feeding length, follow the procedure from Step 1 to Step 4 and readjust.
- If the distance matches the feeding length, proceed to step 6.

6. Perform Micro Print.

- Display the Dist.Adj menu on the operation panel in the same way as in step 1.
- Press the [+] key or [-] key on the operation panel to select “PF5: Micro Print”.
- Press the [Enter] key on the operation panel.
  - “Warming Up Skip ->E” is displayed on Operation panel.



**CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

**NOTE**

- You can start printing during warming up. [☞ 4.4.8 Start Printing during Warm up](#)

- “Printing” is displayed on Operation panel.  
(The printer starts printing after warming up is complete.)
- Starts micro adjustment printing.
- In the pattern, look for a place that has least white lines or overlapping in images. The number printed below the adequate pattern is the micro change value.

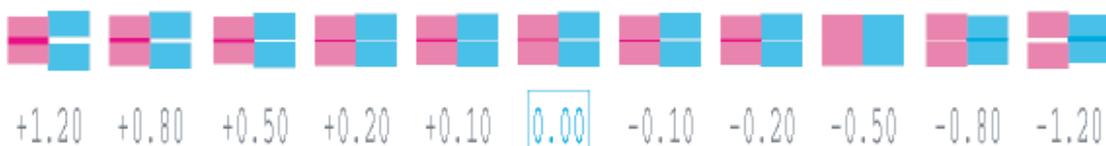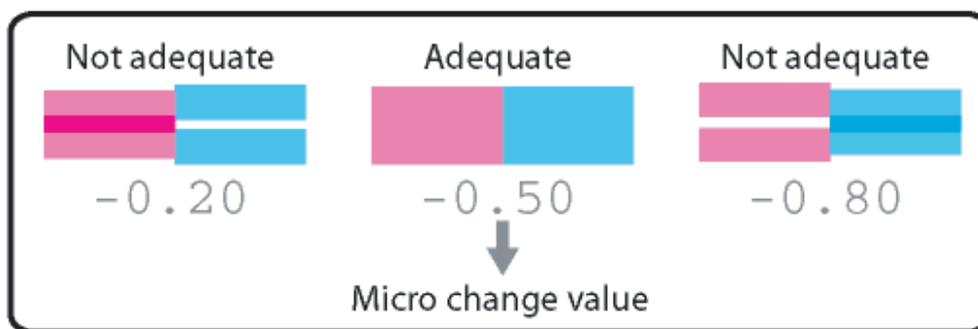

- After the micro adjustment printing is completed, “Micro Change: 0.00%” is displayed on Operation panel.

## 7. Sets up Micro Adjustment Change.

- Press the [+] key or [-] key and enter the micro adjustment value according to the printing result in Step 6.
- Press the [Enter] key on Operation panel.
  - The micro adjustment value is saved. (The saved micro change value will be always shifted to the base value for the pattern printing.)
  - “PF5: Micro Print” is displayed on Operation panel.
  - The adjustment of media feed adjustment value is complete.

#### **4.2.6.3 When you know the adjustment value (when changing the media or for similar operations)**


1. Press the [+] key or [-] key to select “PF6: Micro Change”.
  - a. Press the [Enter] key on the operation panel.
2. Enter the adjustment value.
  - a. Press the [+] key or [-] key to enter the adjustment value.
  - b. Press the [Enter] key on the operation panel.
    - The micro adjustment value is saved. (The saved micro change value will be always shifted to the base value for the pattern printing.)
    - “PF6: Micro Change” is displayed on Operation panel.
  - c. The adjustment of media feed adjustment value is complete.

## 4.3 Menu setups on the operation panel


### 4.3.1 Menu setup procedure

Follow the procedure below to configure each setup menu.

1. Confirm that the operation panel is Normal.
2. Press the [Menu] key on the operation panel.

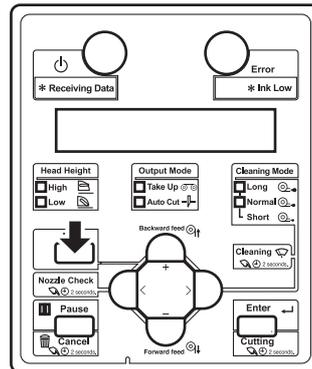

- “Menu1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
3. Press the [+] key or [-] key on the operation panel to select a setup item and press the [Enter] key.

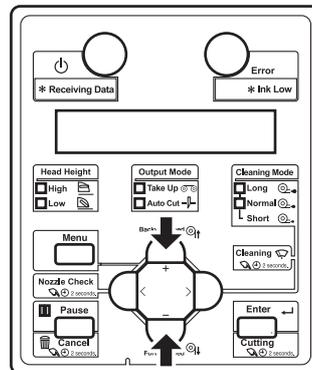


- The settings will be confirmed.
- When setup items have a submenu, the display shifts to the next menu.


#### NOTE

- When a setup item has a submenu, “>” is displayed on the right end of the LCD monitor of the operation panel.
- For the general outline of each setup item, refer to “[4.3.2 Panel setup menu overview](#)”.

4. The setting in the blinking part on the LCD monitor of the operation panel can be changed. Press the [+] key or [-] key to change the set value.

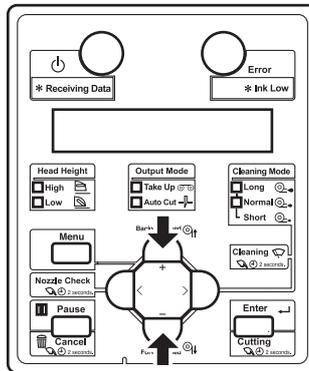

5. To save the changed setting, press the [Enter] key on the operation panel.

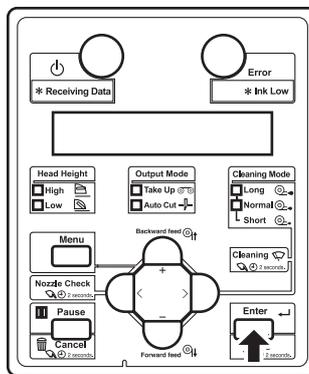


- The setting is saved and the next setup item is displayed.

**NOTE**

- If you press the [Cancel] key, [+] key or [-] key without pressing [Enter] key after changing a setting, the change will not be saved.

6. Press the [Cancel] key on the operation panel to exit from the setup.

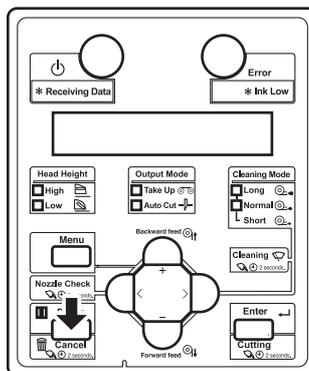

- The previous setup menu is displayed.
- When the main menu is displayed, the screen turns to Normal.

### 4.3.2 Panel setup menu overview

This section explains the Panel setup menu of the printer.  
There are the following items in the Panel setup menu.

Setup item	Description
Setup menu	Various settings of the printer are configured.
Test Print menu	Performs nozzle check of the print head and setup list.
Cleaning menu	Performs head cleaning.
Menu Option menu	Sets up the contents of the Setup menu.
System Info menu	Display the system information on your printer.
Sleep Mode menu	Sleep mode settings are configured.
Display menu	Sets the language and unit displayed on the LCD monitor of the operation panel.
Job status	Displays information about the previous printing result.
Roll Length Manage menu	Set the remaining roll length settings.

**TIP**

- For details of each setup item, refer to “**5 Panel setup menu**”.

## 4.4 Operating from the operation panel

This section explains various functions that can be operated from the operation panel.

### TIP


•For names and functions of each key, refer to “[2.1.3 Operation panel](#)”.

### 4.4.1 Feeding media

You can feed the roll media at a position that you want.

Follow the procedure below to feed media.

1. Confirm that the operation panel is Normal.
2. Make sure that the media loading lever is lowered.
3. Press the [Forward↓] key or the [Backward↑] key on the operation panel.

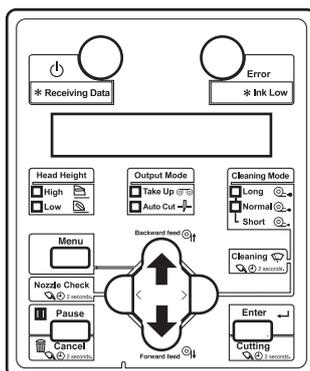

- Media is fed forward or backward.
4. Release the [Backward↑] key or [Forward↓] key on the operation panel after feeding media to the desired position.

## 4.4.2 Automatic PF adjustment

You can automatic PF adjustment that you want.


### NOTE

- "PF Adjust" requires at least 15.7 inches (400 mm) printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 15.7", your printer will not print. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

☞ [5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)


Follow the procedure below to Automatic PF adjustment.

1. Confirm that the operation panel is Normal.
2. Make sure that the media loading lever is lowered.
3. Press the [Enter] key on the operation panel.

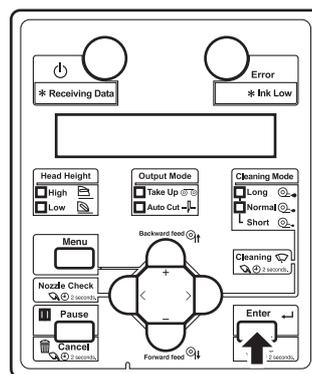


- "Auto PF adjust? No" is displayed on the operation panel.

4. Press the [+] key or [-] key to select "Auto PF adjust? Yes".

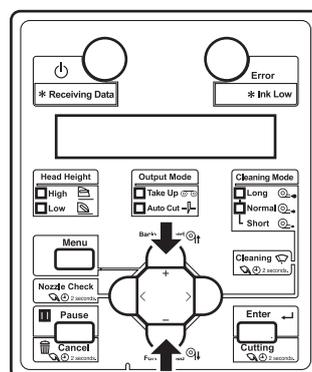

- Press the [Enter] key on the operation panel.

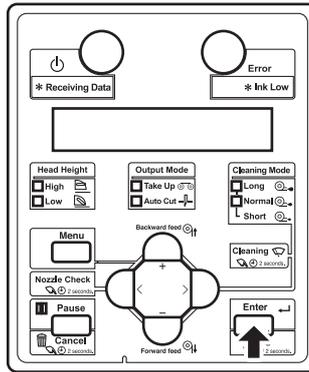

- “Warming Up Skip ->E” is displayed on Operation panel.

### **CAUTION**

- While “Warming Up” is displayed, do not touch Platen and Media guide. They become very hot and you could burn yourself.

### **NOTE**


- You can start printing during warming up.  
[🔗 4.4.8 Start Printing during Warm up](#)

- A confirmation pattern for Automatic PF adjustment is printed.  
(Starts printing after warming up is complete.)
- The printer scans the print using the embedded color sensor, then automatically performs a PF adjustment.
    - Once successfully completed, the message “Auto Adjust Succeeded” will appear on the panel.
    - If failed, the message “Auto Adjust Failed” will appear on the panel.
    - In the following cases, perform manual PF adjustment.  
[🔗 4.2.6 Media feed adjustment](#)
      - If the print defect persists after automatic PF adjustment.
      - If the automatic PF adjustment failed.

### 4.4.3 Stopping printing operation

If you want to stop printing for some reason, operate as follows.

1. Stop sending printing data from the computer to the printer.
2. Press the [Cancel] key on the operation panel for two seconds.

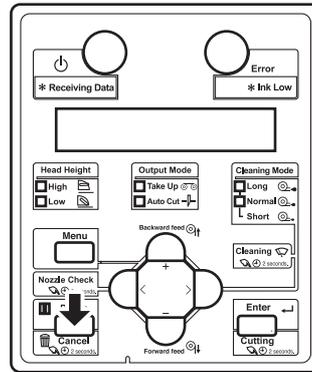

- The printer operates as follows.

Printer status	Operation with the [Cancel] key pressed for two seconds
During printing	Terminates the printing, and deletes one data remaining in the printer.
Receiving data/analyzing data	Deletes the data already received and converted.

#### NOTE

- If a large amount of data is saved on the printer, the operation panel may not return to Normal by a single [Cancel] key operation.  
In such cases, wait for a few seconds and press the [Cancel] key again.

## 4.4.4 Cutting media

This section explains how to cut media.


If Media ejection mode is set to “Cut”, the printer cuts the media automatically after printing.

### ✎ 5.1.6 Output Mode menu

If you press the [Cutting] key on the operation panel more than two seconds while the operation panel is Normal, you can cut the media at the desired position.

Follow the procedure below to cut the roll media.

1. Confirm that the operation panel is Normal.
2. Press the [Cutting] key on the operation panel for more than two seconds.

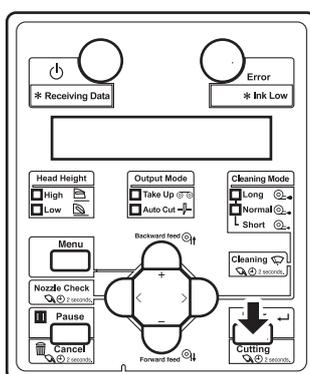

- The printer feeds the roll media to the length of the margin and cuts the media.

### NOTE

- When loading the new roll media, cut the front edge of the media if it is not straight.
- The cutter is a consumable component. Replace it periodically.
- ✎ 6.1.3 Replacing Cutter
- When the media detection is set to "Off", the media cannot be cut automatically.

## 4.4.5 Cutting media manually

This section explains how to cut the roll media manually.

### CAUTION


- **Right after printing, the media guide becomes very hot. Allow the media guide to cool down before the next operation.**

Follow the procedure below to cut the roll media.

1. Verify the following regarding the operational condition of the product.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.
2. To change the position to cut the roll media, refer to “[4.4.1 Feeding media](#)” and advance the roll media to the desired cut position.
3. Place a razor blade on the media cut groove on the media guide, and cut the roll media.

### CAUTION

- **Pay attention to the following points when cutting roll media. Mishandling the razor blade may cause a cut on your finger or hand.**
  - **When you hold media, do not place your finger on the media cut groove.**
  - **Move the razor blade along the media cut groove.**

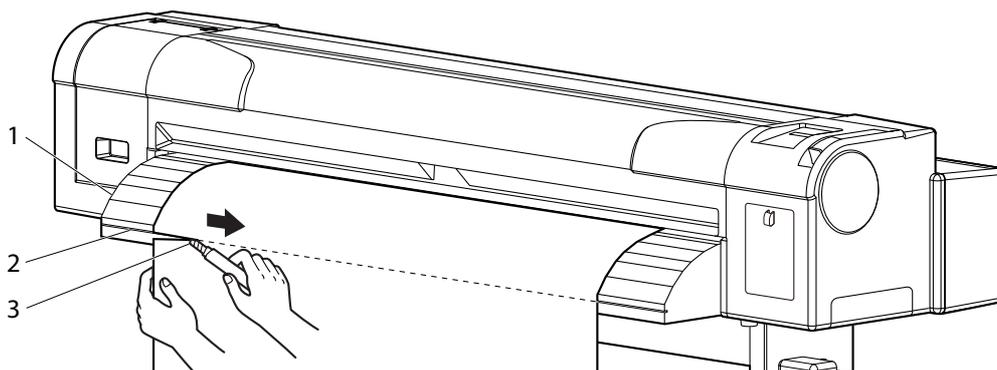

No.	Name
1	Media guide
2	Media cut groove
3	Razor blade

- The procedure for cutting the roll media is complete.

**NOTE**

- When loading the new roll media, cut the front edge of the media if it is not straight.


## 4.4.6 Changing and confirming settings while printing

While the printer is operating, you can change or confirm settings for the Panel setup menu.

### 4.4.6.1 Procedure for changing and confirming settings while printing

Follow the procedure below to change or confirm settings for the Panel setup menu.

1. Confirm that the printer is in one of the following conditions.
  - Receiving data
  - Analyzing data
  - Printing
2. Press the [Menu] key on the operation panel.

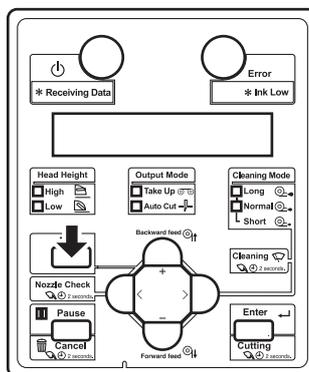

- “Menu5: Temperature” is displayed on the operation panel.
3. Press the [+] key or [-] key to change or confirm settings.

**NOTE**

- For the setting items whose settings can be changed or confirmed, refer to “[4.4.6.2 Settings that can be changed or confirmed while printing](#)”.

#### 4.4.6.2 Settings that can be changed or confirmed while printing

##### NOTE

- When you change a setting during operation, be sure to select “Backup” to save the setting that you changed.  
If the printer returns to Normal without “Backup” being selected, the changed setting is not saved.
- Check the following before using the Job status items
  - The values displayed in the Job status items are rough indications. They do not guarantee the strict accuracy.
  - If the length information is not included in the print data, “0” is displayed for all items.
  - You can check the “remaining print” and “remaining time” in the way described in [☞ 4.4.9 Normal Display while Printing](#).
  - To check the information about the printed data, refer to the following.

Setup item	Setting	Description	Reference
Temperature	Pre	Checks the current temperature of the pre-heater.	—
	Platen	Checks the current temperature of the platen heater.	
	Dryer	Checks the current temperature of the dryer.	
Pre heater	Off / 30 °C to 50 °C	Changes the temperature of the pre-heater.	<a href="#">☞ 5.1.1.1.5 Pre-heater menu</a>
Platen heater	Off / 30 °C to 50 °C	Changes the temperature of the platen heater.	<a href="#">☞ 5.1.1.1.6 Platen heater menu</a>
Dryer	Off / 30 °C to 50 °C	Changes the temperature of the dryer.	<a href="#">☞ 5.1.1.1.7 Dryer menu</a>
PF Adjust	-5.00% to 0.00 to 5.00%	Change the feed adjustment value.	<a href="#">☞ 5.1.1.1.4 Dist.Adj menu</a>
Backup	—	• [Enter] key: Save the changed setting.	—
Job Status	ToDo Length	• Check the whole length of the data (media feed direction) currently being printed.	—
	Done	• Check the printed length of the data currently being printed.	
	Remain	• For the data currently being printed, check the length of the data that has not been printed.	
	Remain Time	• Displays the time remaining for printing.	
	—	• [Cancel] key: The printer returns to Normal.	—

## 4.4.7 Pausing printing


It is possible to pause to print during printing.

Follow the procedure below to pause or restart printing.


### NOTE

- If the printing is paused, the print quality will not be guaranteed.

1. Check that the printer is in operating.
2. Press the [Pause] key on the operation panel.

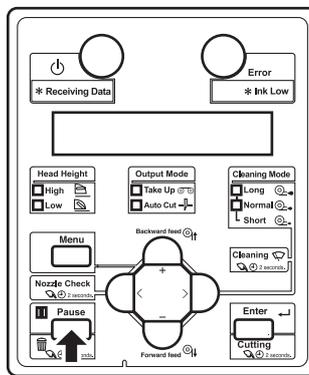

- The printer pauses printing.
  - “PrintRestart -> Enter” is displayed on the operation panel.
3. To restart printing, press the [Enter] key on the operation panel.

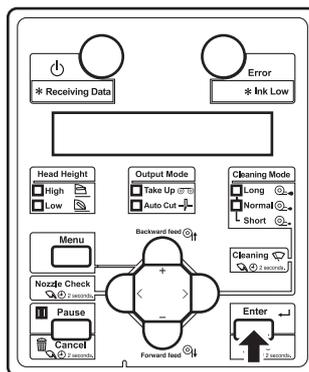

- The printer restarts printing.

## 4.4.8 Start Printing during Warm up

You can start printing even when the heater temperature has not reached the preset value while the printer is being warmed up.

### NOTE


- Even when printing is started during warm up, the printer continues to be warmed up until the preset temperature has been reached.
- When printing is started during warm up, the print quality is not guaranteed.

1. Check if the printer is the printer is being warmed up.
  - “Warming Up” is displayed on the operation panel.
2. Send the data.
  - “Warming Up” “Skip -> Enter” is displayed on the operation panel.

### CAUTION

- **While “Warming Up” is displayed, do not touch Platen and Media guide. You could burn yourself.**

3. When printing during warm up, press the [Enter] key on the operation panel.

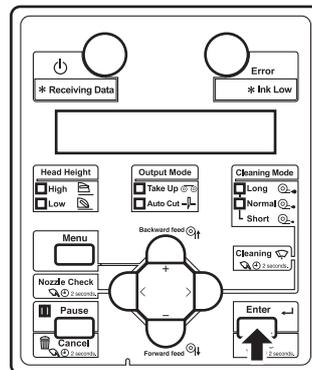

- The printer starts printing.

### 4.4.9 Normal Display while Printing


The remaining length and remaining time to complete the currently printing data can be displayed by an easy operation.

#### NOTE

- The values displayed in this function are just standard values, not guarantee the accuracy.
- If the print data includes no length data, all information will be displayed as “0”.
- To check more detailed information of currently printing data, please refer to the below.  
[☞ 4.4.6.2 Settings that can be changed or confirmed while printing](#)
- To check the information of printed data, please refer to the below.  
[☞ 5.8 Job Status Menu](#)

Follow the procedures below to display the information.

1. Check if the printer is printing a data.
2. Press [-] key on the operation panel to display “Print Remain”.

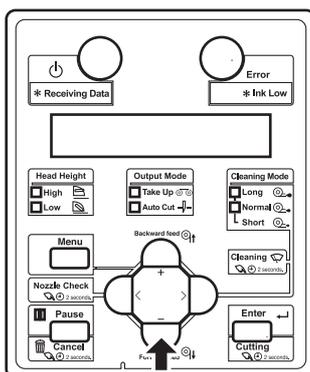


- The remaining length of data currently printing will be displayed.

P r i n t   R e m a i n   x x x . x m

#### TIP

- When the length display setting is set to inch, the length will be displayed in inch.  
[☞ 5.7.3 Length menu](#)
- The [+] key on the operation panel also can switch the display. In that case, “Remain Time” (Step 3) will be displayed first.

3. Press [-] key on the operation panel to display “Remain Time”.

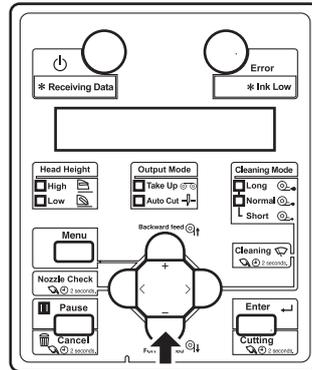

- The remaining length of data currently printing will be displayed.

R e m a i n T i m e    x x x x m i n

4. To return the display to [Printing], press [-] key on the operation panel.

P r i n t i n g



## 5 Panel setup menu

The section explains the Setup menu of the printer.

Setup item	Description
Setup menu	Various settings of the printer are configured. ☞ <a href="#">5.1 Setup menu</a>
Test Print menu	Performs nozzle check of the print head and setup list. ☞ <a href="#">5.2 Test Print Menu</a>
Cleaning menu	Performs head cleaning. ☞ <a href="#">5.3 Cleaning menu</a>
Menu Option menu	Sets up the contents of the Setup menu. ☞ <a href="#">5.4 Menu Option menu</a>
System Info menu	Display the system information on your printer. ☞ <a href="#">5.5 System Information menu</a>
Sleep Mode menu	Sleep mode settings are configured. ☞ <a href="#">5.6 Sleep Mode menu</a>
Display	Sets the language and unit displayed on the LCD monitor of the operation panel. ☞ <a href="#">5.7 Display menu</a>
Job Status menu	Displays information about the previous printing result of the Job status. ☞ <a href="#">5.8 Job Status Menu</a>
Roll Length Manage menu	Set the remaining roll length settings. ☞ <a href="#">5.9 Roll Length Manage menu</a>

### TIP

The <> parts in each list are factory default settings (default).

## 5.1 Setup menu

Various settings of the printer are configured.

Setup item	Description
User Type	Sets the user type setting for printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.1 User Type menu</a>
Spitting	Sets up the spitting operation while printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.2 Spitting menu</a>
Side Margin	Specifies the right and left margins of printed media. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.3 Side Margin menu</a>
Media Initial	Sets whether to detect the media width and edge while initializing the media. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.4 Media Initial menu</a>
Media Width	Specifies the media width between the loading mark and the left end if media detection is not performed during media initialization. Displays the detected media width if media detection is performed during media initialization. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.5 Media Width menu</a>
Output mode	Sets the media ejection method after printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.6 Output Mode menu</a>
Method of Cut	Sets the media cutting method after printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.7 Method of Cut menu</a>
Origin	Sets the beginning of printing (origin) of the print data. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.8 Origin menu</a>
Prev. Stick	Sets up to prevent media from sticking when printing starts. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.9 Prev. Stick menu</a>
StandbyHeating	Sets the time to preheat the heater while the printer is n standby mode. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.10 StandbyHeating menu</a>
Head Travel	Sets up the range that the print head moves while printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.11 Head Travel menu</a>
Multi Strike	Sets up the overwrite count per line. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.12 Multi Strike menu</a>
Strike Wait	Sets up the waiting time while overwrite printing. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.13 Strike Wait menu</a>

Setup item	Description
Slant Check	Sets up slanting detection during media loading. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.14 Slant Check menu</a>
Auto Cleaning	Sets up the time for auto cleaning during standby, before printing, and during printing. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.15 Auto Cleaning menu</a>
Longstore	Wash the print head with the cleaning fluid. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.16 Longstore menu</a>
CR Maintenance	Performs maintenance. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.17 CR Maintenance menu</a>
Initialization	Returns the settings of the printer to default. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.18 Initialization menu</a>
IP Address	Sets the IP address of the printer. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.19 IP Address menu</a>
Subnet Mask	Sets the subnet mask of the printer. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.20 Subnet Mask menu</a>
Gateway	Sets the gateway. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.21 Gateway menu</a>
Header dump	Set whether or not to print the dump data of print data. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.22 Header Dump menu</a>
Start Feed	Rewinds or feeds the media the amount specified by the set value. <ul style="list-style-type: none"> <li>• [Enter] key: Moves to the sub menu.</li> </ul>  <a href="#">5.1.23 Start Feed Menu</a>
Alert Buzzer	Selects how to turn off the printer beep sound when an error occurs. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.24 Alert Buzzer menu</a>
Front Interlace	Sets the media edge treatment function. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the previous menu.</li> </ul>  <a href="#">5.1.25 Front Interlace Menu</a>
Nozzle Select	You can set whether to reduce the print head nozzles for printing. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <a href="#">5.1.26 Select Nozzle menu</a>
Temporary	Displays the menus which have been set to hide in the Menu Option menu temporarily. <ul style="list-style-type: none"> <li>• [Enter] key: returns to the previous menu with all set up items displayed.</li> <li>• [Cancel] key: returns to the previous status in the Selection menu when the Setup menu is displayed.</li> </ul>  <a href="#">5.4 Menu Option menu</a>

Setup item	Description
—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu.</li> </ul>  <b>5 Panel setup menu</b>

### 5.1.1 User Type menu

Sets the user type setting for printing.

Setup item	Setting	Description
User Type	Type 1	Settings for the media type to print are configured. It is possible to set 15 different user settings as “Type 1 to 15” for printing. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1 User Type menu</b>
	Type 2	
	...	
	Type 14	
	Type 15	
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: saves the setting and shifts to the previous menu.</li> </ul>  <b>5.1 Setup menu</b>

### 5.1.1.1 User Type menu

Various settings on the user type settings are configured.

In the user type menu, 15 different settings can be set as Type 1 to 15 for the following printing operation.

Setup item	Setting	Description
Type 1 to 15	PrintMode	Sets up the Print Mode according to the usage of print data or print speed. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.1 Print Mode menu</b>
	Effect	Sets up the Effect menu. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.2 Effect menu</b>
	Adjust Print	Sets up when adjusting the printer for the optimum quality of image print. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.3 Adjust Print menu</b>
	PF Adjust	Sets up various settings on the media feed adjustment. <ul style="list-style-type: none"> <li>[&gt;] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.4 Dist.Adj menu</b>
	Pre heater	Sets the temperature of the pre-heater. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.5 Pre-heater menu</b>
	Platen heater	Sets the temperature of the platen heater. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.6 Platen heater menu</b>
	Dryer	Sets the temperature of the dryer. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.7 Dryer menu</b>
	Vacuum Fan	Sets up vacuum fan operation. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.8 Vacuum Fan menu</b>
	Media Thickness	Set the thickness of the media you are using. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.9 Media thickness menu</b>
	User Copy	Collectively copies the setting values of the user type currently selected to a different user type. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>5.1.1.1.10 User Copy menu</b>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.</li> </ul>  <b>5.1.1 User Type menu</b>

### 5.1.1.1.1 Print Mode menu

Settings for print quality (Print Mode) are set according to the usage of print data or print speed.

Setup item	Setting	Description
Mode	High Quality	Set the print mode. <ul style="list-style-type: none"> <li>• High Quality: Select this if you are looking for better print quality than the Quality print mode. This mode prints with maximum print resolution at minimum print speed.</li> <li>• Quality: Select this for high quality printing. This mode prints with high print resolution at low print speed.</li> <li>• Production: Select this for high-speed printing. This mode prints at fast print speed with low print resolution.</li> <li>• High Speed: Select this if you want to maximize productivity. This mode prints at maximum print speed with minimum print resolution.</li> </ul> ⓘ <a href="#">5.1.1.1.2 Effect menu</a>
	<Quality>	
	Production	
	High Speed	
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> ⓘ <a href="#">5.1.1.1 User Type menu</a>

#### NOTE

The colors of the image may become irregular depending on the media and print mode you are using. In such a case, use the following mode to improve irregular colors.

- When using Production or High Speed, change it to High Quality or Quality.

### 5.1.1.1.2 Effect menu

Sets up the Effect menu.

Set up this menu when you want to improve print quality by adjusting the set Print Mode.

#### NOTE

- The print quality may not be improved depending on the printing condition.

Setup item	Setting	Description
Effect	None	The Effect function is not used.
	Wave	The printing joint will be the wave form. The print quality may be improved than “None”.
	Fine & Fuzz	The printing joint will shade off as the wave form. Perform the printing at slower speed than “Wave”.
	Fine & Fog *1	The printing joint will shade off. Set up this menu to improve horizontal banding with “Fine & Fuzz”. Perform the printing at a slower speed than “Fine & Fuzz”.
	i-Weave EX	Edges between each pass are barely noticeable and seamless.
	i-Screen *1	Edges between each pass are barely noticeable and more seamless.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <b>5.1 Setup menu</b>

\*1 The default value of the effect differs depending on the selected print mode as shown below.

Print Mode	Effect Default Value
High Quality	i-Screen
Quality	
Production	
High Speed	Fine&Fog

### 5.1.1.1.3 Adjust Print menu

Sets up when adjusting the printer for the optimum quality of image print.

This setting is different for each user type setting.

#### NOTE

- This printer was adjusted at the factory shipment so that it obtains the optimum printing quality. Adjust the quality if the print quality changes after the installation environment or the media is changed.
- If print defects (like banding or grainy look) still appear on the print, try an auto calibration again, or go to "Standard" or "Custom" to perform calibration.
  - ☞ [3.6.3 Standard Adjust Print](#)
  - ☞ [3.6.4 Custom Adjustment Pattern](#)
- After performing Standard adjust print and changing the user type setting, make sure to perform Adjust print.
- When performing Custom adjust print, the print modes are adjusted all at once. Therefore, you do not need to perform print adjustment even when the user type setting has been newly set or changed.
- When using RIP software, etc, and setting the resolution which is different from the setting in the user type setting, make sure to perform adjustment for all print modes by Custom Adjust Print.
- "Adjust Print" requires at least 21.6 inches (550 mm) printable width. Before printing, make sure that there is sufficient width on the media.
 

If printable width is less than 21.6", your printer will not print. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

  - ☞ [5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)

Setup item	Setting	Description
Adjust Print	Media Thickness	Shifts to the menu where you can enter the thickness of the media you are using. ☞ <a href="#">5.1.1.9 Media thickness menu</a>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> ☞ <a href="#">5.1.1.1 User Type menu</a>

### Media thickness menu

Setup item	Setting	Description
Media Thickness	80μm to <170μm> to 1300μm	Enter the thickness of the media you are using. <ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.</li> </ul> ☞ <a href="#">Auto Adjust Print Menu</a> ☞ <a href="#">Standard Adjust Print Menu</a> ☞ <a href="#">Custom Adjust Print Menu</a>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> ☞ <a href="#">5.1.1.1 User Type menu</a>

**NOTE**

- The settings here are the same as [5.1.1.1.9 Media thickness menu](#).

## Auto Adjust Print Menu

Perform the automatic adjustment using the embedded color sensor.

Setup item	Setting	Description
Adj. Print1: Auto	ALL	Perform automatic adjustment for all patterns (A to F) using the color sensor.  <a href="#">3.6.2 Auto Adjust Print</a>
	Standard	Perform automatic adjustment for the currently selected print mode using the color sensor (calibrate the same print mode as "Standard Adjust Print Menu").  <a href="#">3.6.2 Auto Adjust Print</a>
	Pattern A to F	Choose the adjustment pattern between A and F for automatic adjustment.  <a href="#">3.6.2 Auto Adjust Print</a>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.3 Adjust Print menu</a>

## Standard Adjust Print Menu

Adjusts only the print mode in the user type setting which is currently set.

Setup item	Setting	Description
Adj. Print2: Standard	Confirm Ptn.	Print the test pattern for the alignment. Check before adjusting.  <a href="#">3.6.3.1 Standard Confirmation Pattern</a>
	Rough Pattern	Perform this adjustment when the misalignment is large. Print adjustment patterns and enter the set values.  <a href="#">3.6.3.2 Standard Rough Adjustment Pattern</a>
	Fine Pattern	Perform this adjustment when the misalignment is small. Print adjustment patterns and enter the set values.  <a href="#">3.6.3.3 Standard Micro Adjustment Pattern</a>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.3 Adjust Print menu</a>

## Custom Adjust Print Menu

Perform adjustment for all patterns (A to F).  
All print modes will be adjusted.

Setup item	Setting	Description
Adj. Print3 : Custom	Confirm Ptn.	The test patterns of A to F will be printed for Adjust print. Check before adjusting.  <a href="#">3.6.4.1 Custom Confirmation Pattern</a>
	Rough Ptn. ALL	Perform this when the degree of misalignment is large. Print Adjust patterns A to F and enter the set values.  <a href="#">3.6.4.2.1 Rough Pattern ALL</a>
	Rough Pattern A to F	When the degree of misalign is big, print out an adjust pattern selected from A to F and enter the value.  <a href="#">3.6.4.2.2 Rough Pattern A to F</a>
	Fine Ptn. ALL	Perform this when the degree of misalignment is small. Print Adjust patterns A to F and enter the set values.  <a href="#">3.6.4.3.1 Fine Pattern ALL</a>
	Fine Pattern A to F	When the degree of misalign is small, print out an adjust pattern selected from A to F and enter the value.  <a href="#">3.6.4.3.2 Fine Pattern A to F</a>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.3 Adjust Print menu</a>

## 5.1.1.1.4 Dist.Adj menu

Sets up various settings on the media feed adjustment.

Setup item	Setting	Description
PF	Auto	The printer performs an automatically PF adjustment. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(1) Auto menu</b>
	Initial Print	Performs Initial Adjust Print. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(2) Initial Print menu</b>
	Initial Change	Sets up Initial Adjust Change. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(3) Init.Adj.Change menu</b>
	Confirm Print	Performs Confirm Print. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(4) Confirm Print menu</b>
	Micro Print	Performs Micro Adjustment Print. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(5) Micro Print menu</b>
	Micro Change	Sets up Micro Adjustment Change. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul>  <b>(6) Micro Adj.Change menu</b>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.</li> </ul>  <b>5.1.1.1 User Type menu</b>

**NOTE**

- "PF Adjust" requires at least 15.7 inches (400 mm) printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 15.7", your printer will not print. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

 **5.1.3 Side Margin menu, 5.1.5 Media Width menu, 5.1.8 Origin menu**

### (1) Auto menu

The printer performs an automatically PF adjustment.

Setting	Description
—	<ul style="list-style-type: none"> <li>• [Enter] key: “Warming Up” is displayed on the operation panel and printer performs an automatically PF adjustment.</li> </ul>
	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.4 Dist.Adj menu</a>

### (2) Initial Print menu

Performs Initial Adjust Print.

Setup item	Setting	Description
FeedLength	100mm to <250mm> to 500mm	Changes the length (feed length) of the media feed direction for Initial Print. <ul style="list-style-type: none"> <li>• [Enter] key: Determines the setting. “Printing” is displayed on the operation panel and Initial Print starts. After printing, the printer enters Normal.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.4 Dist.Adj menu</a>

### (3) Init.Adj.Change menu

Sets up Initial Adjust Change.

Setup item	Setting	Description
Init.	The set value $\pm 50.0$ mm in “Feed length” of Initial adjust print	Sets up Initial Adjust Change. e.g) When the set value in “Feed length*” of Initial adjust print is set to 250mm, the adjustment range in this menu is 200mm to 300mm.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1.4 Dist.Adj menu</a>

#### (4) Confirm Print menu

Performs Confirm Print.

Setup item	Setting	Description
FeedLength	100mm to <250mm> to 500mm	<p>Changes the length (feed length) of the media feed direction for Confirm Print.</p> <ul style="list-style-type: none"> <li>[Enter] key: Determines the setting. “Printing” is displayed on the operation panel and Initial Print starts. After printing, the printer enters Normal.</li> </ul>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1.1.1.4 Dist.Adj menu</a></p>

#### (5) Micro Print menu

Performs Micro Adjustment Print.

Setup item	Setting	Description
Micro Print	-5.00% to <0.00%> to 5.00% (After printing)	<ul style="list-style-type: none"> <li>Prints a micro adjustment pattern based on the currently set micro adjustment value with each of the following values applied to it. ±0.10%、±0.20%、±0.50%、±0.80%、±1.20%</li> <li>After printing, enter a micro adjustment value in the following range: -5.00% ~ &lt;0.00%&gt; ~ 5.00%</li> </ul>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu. Stops printing and returns to the previous menu if printing is in progress.</li> </ul> <p> <a href="#">5.1 Setup menu</a></p>

#### (6) Micro Adj.Change menu

Sets up Micro Adjustment Change.

Setup item	Setting	Description
Micro Adj.Change	-5.00% to <0.00> to 5.00%	Sets up Micro Adjustment Change.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1 Setup menu</a></p>


### 5.1.1.1.5 Pre-heater menu

Sets the temperature of the pre-heater.

Set to curb a rapid temperature change at the printing portion by pre-heating the media before printing.

**NOTE**

- The set temperature of the pre-heater differs depending on the media.

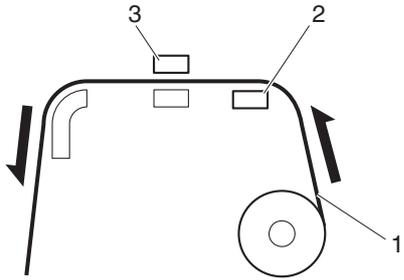Setup item	Setting	Description
Pre heater	Off / <30 °C> to 50 °C	<p>Sets the temperature of the pre-heater.</p>  <p>1.Roll media 2.Pre heater 3.Print head</p>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1.1.1 User Type menu</a></p>


## 5.1.1.1.6 Platen heater menu

Sets the temperature of the platen heater.

Set to improve print quality by allowing the ink to settle by heat.

**NOTE**

- The set temperature of the platen heater differs depending on the media.

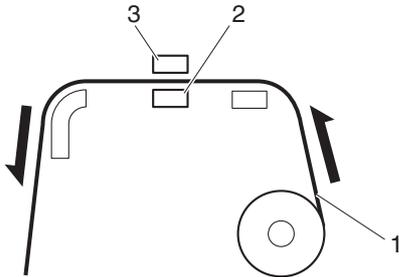
Setup item	Setting	Description
Platen heater	Off / <30 °C> to 50 °C	Sets the temperature of the platen heater.  1.Roll media 2.Platen heater 3.Print head
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1.1.1 User Type menu</a></p>

### 5.1.1.1.7 Dryer menu

Sets the temperature of the dryer.  
Set to dry the print side after printing.

**NOTE**

- The set temperature of the dryer differs depending on the media.

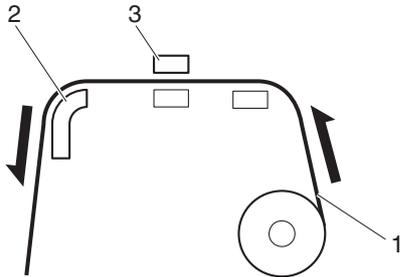Setup item	Setting	Description
Dryer	Off / <30 °C> to 50 °C	<p>Sets the temperature of the dryer.</p>  <p>1.Roll media 2.Dryer 3.Print head</p>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1.1.1 User Type menu</a></p>

### 5.1.1.1.8 Vacuum Fan menu

Sets up vacuum fan operation.

Setup item	Setting	Description
Vacuum Fan	Off	The Vacuum fan operation is not performed.
	Low	Set when there is a possibility of a paper jam caused by failure in media loading when the setting is Medium.
	Medium	Set this when there is a possibility that media feeding may fail and paper may be jammed with the High setting.
	<High>	Set when using general media.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <p> <a href="#">5.1.1.1 User Type menu</a></p>

### 5.1.1.1.9 Media thickness menu

Sets the thickness of the media you are using.

Once the media thickness is entered, print quality is automatically adjusted.

Setup item	Setting	Description
Media Thickness	80 $\mu$ m to <170 $\mu$ m> to 1300 $\mu$ m	Enter the thickness of the media you are using in increments of 10 $\mu$ m.
	-	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">👉 5.1.1.1 User Type menu</a>

#### NOTE

- This menu is to automatically adjust print quality to a certain extent. If you want to improve print quality, manually adjust it.  
👉 [3.6 Adjust Print](#)
- There is no problem even if you adjust print quality without setting the media thickness.

### 5.1.1.1.10 User Copy menu

Collectively copies the setting values of the user type currently selected to a different user type. The following setting values are copied.

- Print mode
- Effect
- Adjustment value for the adjustment print
- Feed adjustment (initial adjustment printing length, initial adjustment value, micro adjustment value)
- Pre-heater/Platen/Dryer
- Vacuum Fan
- Media Thickness


Setup item	Setting	Description
User Copy	<1> to 15, ALL  When user type is set to 1: <2> to 15, ALL	<ul style="list-style-type: none"> <li>• The setting values of the current user type are copied to the selected user type.</li> <li>• When you have selected ALL, the setting values of the current user type are copied to the all other user types.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: copies the settings and shifts to the previous menu.</li> <li>• [Cancel] key: shifts to the previous menu without copying the settings.</li> </ul> <p> <a href="#">5.1.1.1 User Type menu</a></p>

## 5.1.2 Spitting menu

Sets up the spitting operation while printing.

### NOTE

- When Spitting is set to “Off”, the nozzle will become easily clogged because spitting is not performed. In this instance, print quality cannot be guaranteed.
- When the spitting setting is “On Media”, the maximum printable media width becomes 0.4inches (10mm) narrower.  
Therefore, the side margins become “value set on side margin menu” +5mm.
- Depending on the setting, the right margin is a sum of the following.  
“Y (print head transferring distance) of the Origin menu” + “5mm (when the spitting setting is “On Media”)” + “value set on side margin menu”

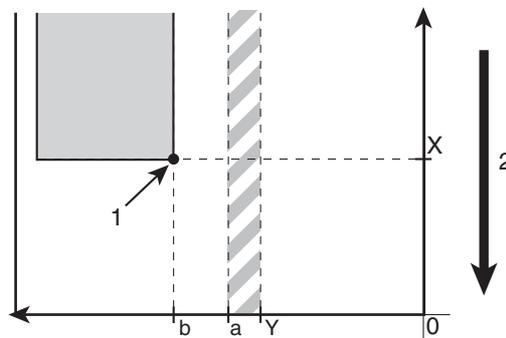

1. Starting position
2. Media feed direction

X (media feeding distance)

Y (print head transferring distance)

a (0mm/5mm: The spitting setting is On, Off/On Media)

b (5mm to 25mm: Side margin setting amount)

[☞ 5.1.3 Side Margin menu](#)

[☞ 5.1.8 Origin menu](#)

Setup item	Setting	Description
Spitting	<On>	Perform the flushing operation on the capping unit located on the origin side for every shuttle. <ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the sub menu.</li> </ul>  <b>5.1 Setup menu</b>
	On Media	Perform the spitting operation on the page margins. The printing speed will be improved since the number of time to return to the capping unit is reduced. <ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the sub menu.</li> </ul>  <b>5.1.2.1 Spitting Pass count menu</b>
	Off	Spitting operation is not performed. <ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> </ul>  <b>5.1 Setup menu</b>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <b>5.1 Setup menu</b>

### 5.1.2.1 Spitting Pass count menu

Set the frequency (spitting return count) that the print head returns to the capping unit (located) on the origin side when setting “On” or “On Media” in the Spitting menu.

#### NOTE

- If you set the flushing return count to a high number, the nozzle will become easily clogged when printing for a long time because flushing is not performed over the capping unit.

Setup item	Setting	Description
ReturnCount	1 time to <2 times> to 999 times	Set the spitting return count.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">5.1.2 Spitting menu</a>

<Example of spitting operation>


Spitting setting	Return Count setting	Operation
On	1 time	Performs the spitting operation on the capping unit on the origin side every time the print head returns to the origin position. Spitting is not performed over the media.
On	5 times	Performs the spitting operation on the capping unit on the origin side every five times the print head returns to the origin position. Spitting is not performed over the media.
On Media	1 time	Performs the spitting operation on the capping unit on the origin side every time the print head returns to the origin position. Flushing is performed over the media every time the print head shuttles back and forth.
On Media	5 times	Performs the spitting operation on the capping unit on the origin side every five times the print head returns to the origin position. Flushing is performed over the media every time the print head shuttles back and forth.
Off	—	Spitting is not performed on the capping unit or the media.

### 5.1.3 Side Margin menu

Set up the right and left margins (side margins) while printing.

**NOTE**

- When the spitting setting is “On Media”, the maximum printable media width becomes 0.4inches (10mm) narrower.  
Therefore, the side margin becomes “value set on side margin menu” +5mm.  
☞ [5.1.2 Spitting menu](#)
- Depending on the setting, the right margin is a sum of the following.  
“Y (print head transferring distance) of the Origin menu” + “5mm (when the spitting setting is “On Media”)” + “value set on side margin menu”

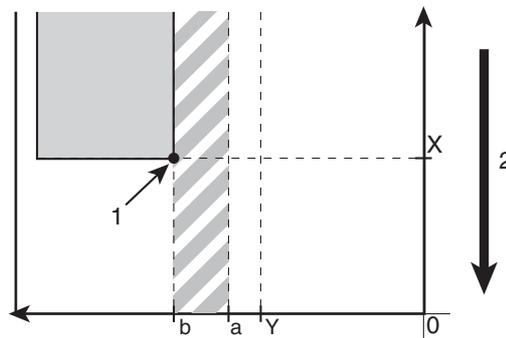

1. Starting position
2. Media feed direction

X (media feeding distance)

Y (print head transferring distance)

a (0mm/5mm: The spitting setting is On, Off/On Media)

b (5mm to 25mm: Side margin setting amount)

☞ [5.1.2 Spitting menu](#)

☞ [5.1.8 Origin menu](#)

Setup item	Setting	Description
Side Margin	<5mm> to 25mm	Set the side margins.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> ☞ <a href="#">5.1 Setup menu</a>

## 5.1.4 Media Initial menu

Sets whether to detect the media width and edge while initializing the media.

### NOTE

- Set the media width that is set in the Media Width menu when setting “Off” in the Media detection menu.  
 [5.1.5 Media Width menu](#)
- When the Media detection menu is set to “Off”, the media cannot be cut automatically.

Setup item	Setting	Description
Init.	Off	The media is not detected.
	Top & Width	Detect the media width and edge while initializing the media.
	<Width>	Detect the media width while initializing the media.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>


### 5.1.5 Media Width menu

Specifies the media width between 0.27" (7 mm) away from the right edge of the platen and the left end if media detection is not performed during media initialization.

 **(1) Media Width menu**

Displays the detected media width if media detection is performed during media initialization.

 **(2) MediaWidth menu**

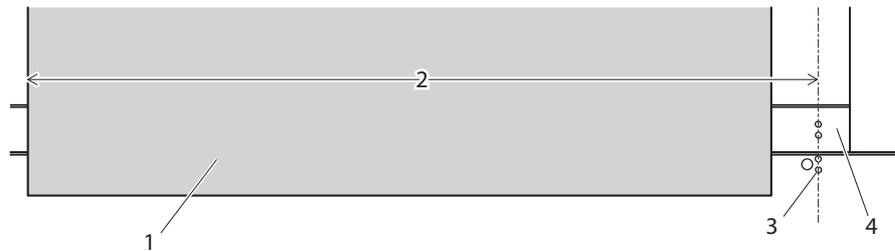

No.	Name
1	Roll media
2	Media width (when not using media detection)
3	Media loading mark
4	Platen

#### NOTE

- If the media is loaded as shown in the illustration and media detection is not performed, the printing may be performed between the right edge of the platen and the media.

 **5.1.8 Origin menu**

## (1) Media Width menu

**NOTE**

- Setting a larger value than the media width set in the Media Width menu may cause ink to leak on the media or printer.

Setup item	Setting	Description
Media Width	210mm to <1000mm> to 1371mm	Set the media width.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1 User Type menu</a>

## (2) MediaWidth menu

Setup item	Setting	Description
MediaWidth	**** mm	Display the media width that is detected while initializing.
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

## 5.1.6 Output Mode menu

Sets the media operation after printing.

### NOTE

- When the take-up unit is not installed, do not set Output mode to “Take-up”.  
By doing so, the product will be unable to function properly.
- When the Output Mode menu is set to “Take-up”, the setting for the Prev. Stick menu is disabled.  
☞ [5.1.9 Prev. Stick menu](#)

Setup item	Setting	Description
Output mode	<Off>	Set when not cutting the media automatically after printing. (Set it to Off even when cutting the media manually.) • [Enter] key: saves the setting and shifts to the sub menu. ☞ <a href="#">5.1.6.1 Ink Drying Time Menu</a>
	Take-up	Set when using the take-up unit. (The media will not be cut after printing.) • [Enter] key: saves the setting and shifts to the sub menu. ☞ <a href="#">5.1.6.2 Page Gap menu</a>
	Auto Cut	Set when cutting the media automatically. • [Enter] key: saves the setting and shifts to the sub menu. ☞ <a href="#">5.1.6.1 Ink Drying Time Menu</a>
	—	• [Cancel] key: cancels the setting and shifts to the previous menu. ☞ <a href="#">5.1 Setup menu</a>

### 5.1.6.1 Ink Drying Time Menu

This menu is used to set ink drying time.

Setup Item	Setting	Description
Ink drying time	<0sec> to 60min	Set the ink drying time.
	—	• [Enter] key: Saves the set value and shifts to the previous menu. • [Cancel] key: Cancels the setting and shifts to the previous menu. ☞ <a href="#">5.1.6 Output Mode menu</a>

### 5.1.6.2 Page Gap menu

If you set the media ejection mode to “Take-up”, the menu shifts to the Page Gap menu.

In the Page Gap menu, you can change the margins between the print results.

Setup item	Setting	Description
Page Gap	<Normal>	Does not change the margin between print results.
	Narrow	The margin between print results becomes narrower than when it is set to “Normal”.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the sub menu.  <a href="#">☞ 5.1.6.1 Ink Drying Time Menu</a></li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.  <a href="#">☞ 5.1.6 Output Mode menu</a></li> </ul>

### 5.1.7 Method of Cut menu

Sets the media cutting operation after printing.

#### NOTE

- When the the media detection is set to “Off”, the media cannot be cut automatically.
- Some media may not be cut (cannot be cut at all or cannot be cut finely). In such a case, set the “Output Mode menu” to “Off” and cut the media manually.

[☞ 5.1.6 Output Mode menu](#)

[☞ 4.4.5 Cutting media manually](#)

- The cutting direction is different depending on the firmware version.

Setup item	Setting	Description
Method of Cut	SingleCut-2 steps	Cuts at a shorter process than SingleCut-3 steps method. Suitable for media with a narrow width.
	<SingleCut-3 steps>	Normal cutting method.
	DoubleCut-2 steps	Set when the media is not cut with SingleCut-2 steps method. Suitable for media with a narrow width.
	DoubleCut-3 steps	Set when the media is not cut with SingleCut-3 steps method.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.  <a href="#">☞ 5.1.7.1 Cut Pressure menu</a></li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.  <a href="#">☞ 5.1 Setup menu</a></li> </ul>

### 5.1.7.1 Cut Pressure menu

Sets the media cutting pressure for the cutting operation.

Setup item	Setting	Description
Cut Pressure	Low	Cut the media at low pressure. Suitable for thin media or if the “High” pressure setting is too strong.
	<High>	Normal cutting pressure
	-	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and return to the previous menu.</li> <li>• [Cancel] Key: Cancel the set value, and return to the previous menu.</li> </ul> <a href="#">☞ 5.1.7 Method of Cut menu</a>


### 5.1.8 Origin menu

Sets the beginning of printing (origin) of the print data.

Set the menu when reprinting on the margin with changing the printing data position to the printed media.

#### NOTE

- When Output Mode menu is set to “Take-up”, the set value X (media feeding distance) becomes 0 mm to 15000 mm.  
[☞ 5.1.6 Output Mode menu](#)
- Depending on the set value of the side margin, the maximum set value of Y (print head transferring distance) decreases.  
[☞ 5.1.3 Side Margin menu](#)

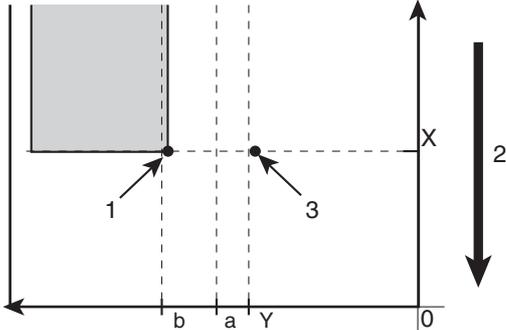Setup item	Setting	Description
Origin	<ul style="list-style-type: none"> <li>X (media feeding distance): -15000 mm to 15000 mm</li> <li>Y (print head transferring distance): 0 mm to 1151 mm</li> </ul>	<p>Change the print head position and media feeding distance with the following keys.</p> <ul style="list-style-type: none"> <li>[&gt;] key: Decreases the print head transferring distance</li> <li>[&lt;] key: Increases the print head transferring distance</li> <li>[+] key: Increase the media feeding distance.</li> <li>[-] key: Decrease the media feeding distance.</li> </ul>  <p>1. Starting position 2. Media feeding direction 3. Setting position of "Origin menu"</p> <p>X (media feeding distance) Y (print head transferring distance) a (0mm/5mm: The spitting setting is On, Off/On Media) b (5mm to 25mm: Side margin setting amount)</p> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>Depending on the setting, the right margin is a sum of the following. "Y (print head transferring distance) of the Origin menu" + "5mm (when the spitting setting is "On Media")" + "value set on side margin menu"</li> </ul> <p><a href="#">5.1.2 Spitting menu</a> <a href="#">5.1.3 Side Margin menu</a></p>
Confirm Position -> Enter		<ul style="list-style-type: none"> <li>[Enter] key or after a certain period of time: Determines the setting. Print head returns to the original position. Save the setting and shift to the previous menu. <a href="#">5.1 Setup menu</a></li> </ul>
—		<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu. <a href="#">5.1 Setup menu</a></li> </ul>

### 5.1.9 Prev. Stick menu

Sets up to prevent media from sticking when printing starts.

#### NOTE

- When the Output Mode menu is set to “Take-up”, the setting for the Prev. Stick menu is disabled.  
 [5.1.6 Output Mode menu](#)

Setup item	Setting	Description
Prev. Stick	<Off>	The stick-prevent operation is not performed.
	On	The stick-prevent operation is performed. Feed the media back and forth to prevent from sticking.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

### 5.1.10 StandbyHeating menu

Sets the time to preheat the heater while the printer is in standby mode.

Setup item	Setting	Description
Standby Heating	10 minutes - <60 minutes>	Sets the time to pre-heat the heater. When the preset time has passed, each heater turns Off.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.1.1 User Type menu</a>

### 5.1.11 Head Travel menu

Sets up the range that the print head moves while printing.

Setup item	Setting	Description
Distance	<Data>	The print head moves the range of the print data width. The printing speed will be improved since the moving range of the print head is optimized.
	Machine	The print head moves from origin to the maximum printable media width.
	<Media Width>	The print head moves the range of the media width.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

#### NOTE

- The minimum travel range of the printer's CR is 19.7 inches (500mm).
- Note that even when the media with a width that is below 19.7" is loaded while the printer is set to "Data" or "Media Width", the actual CR travel range does not go below 19.7".

### 5.1.12 Multi Strike menu

Sets up the overwrite count per line.

Setup item	Setting	Description
Multi Strike	<1 time> to 9 times	Set the overwrite count.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

### 5.1.13 Strike Wait menu

Sets up the waiting time while overwrite printing.

#### NOTE

- When using the media with a narrow width, the media cannot be warmed up adequately, therefore the print quality may not be preserved.  
In such a case, set up the Strike Wait time while overwrite printing to warm up the media adequately before printing.

Setup item	Setting	Description
Strike Wait	<0.0 sec.> to 0.1 sec. to 5.0 sec.	Sets the overwrite wait time.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">5.1 Setup menu</a>

### 5.1.14 Slant Check menu

Sets up slanting detection during media loading.

Setup item	Setting	Description
Slant Check	Off	Slant Check is not performed.
	<On>	Slant Check is performed.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">5.1 Setup menu</a>

### 5.1.15 Auto Cleaning menu

Configure the settings for the auto-cleaning operation.

**TIP**

•The cleaning mode reflects the settings in the operation panel.

☞ **6.2.3 Head cleaning**

Setup item	Setting	Description
Auto Cleaning	WaitingTime	Set the value for auto-cleaning in standby mode. ☞ <b>5.1.15.1 Idle Auto Cleaning</b>
	Print time	Set the value for auto-cleaning in printing mode. ☞ <b>5.1.15.2 Printing Mode Auto Cleaning</b>
	Before printing	Set the value for auto-cleaning in pre-printing mode. ☞ <b>5.1.15.3 Pre-printing Mode Auto Cleaning</b>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.</li> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> ☞ <b>5.1 Setup menu</b>

#### 5.1.15.1 Idle Auto Cleaning

Set the auto cleaning interval for standby mode.

Setup item	Setting	Description
WaitingTime	Off / 10 mins to <360 mins> to 1440 mins	Sets the time for auto-cleaning in WaitingTime mode. <ul style="list-style-type: none"> <li>• Off: Auto cleaning is not performed.</li> <li>• Others: Perform the head cleaning selected in Cleaning menu after the setting time has elapsed.</li> </ul> ☞ <b>6.2.3 Head cleaning</b>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> ☞ <b>5.1.15 Auto Cleaning menu</b>

### 5.1.15.2 Printing Mode Auto Cleaning

Set the auto cleaning interval for printing mode.

Setup item	Setting	Description
PrintingTime	<Off> / 5 mins to 180 mins	Selects the time for auto-cleaning while printing. <ul style="list-style-type: none"> <li>• Off: Auto cleaning is not performed.</li> <li>• Others: Perform the head cleaning selected in Cleaning menu after the setting time has elapsed.</li> </ul>  <a href="#">6.2.3 Head cleaning</a>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.15 Auto Cleaning menu</a>

### 5.1.15.3 Pre-printing Mode Auto Cleaning

Set the value for auto-cleaning in pre-printing mode.

Setup item	Setting	Description
Before Print	<Off>	The auto cleaning is not performed.
	On	<ul style="list-style-type: none"> <li>• Perform the head cleaning selected in the Cleaning menu before printing.</li> </ul>  <a href="#">6.2.3 Head cleaning</a>
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1.15 Auto Cleaning menu</a>

### 5.1.16 Longstore menu

Wash the print head with the cleaning fluid.

#### NOTE

- Make sure to use the dedicated cleaning fluid (Part number: PRNI-SW-EIP-220-CLN-MUT or VJ-MS31-CL220U).

Setup item	Setting	Description
Longstore	Start	Wash the print head with the cleaning fluid. <ul style="list-style-type: none"> <li>• [Enter] key: Performs the head washing operation. The following content is displayed on the operation panel. ☞ <b>6.5.1 Long-term storage</b></li> </ul>
	Remove Cartridges	Remove the ink cartridge, and install the cleaning cartridge. ☞ <b>6.1.1 Replacing ink cartridges</b>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu without Head washing. ☞ <b>5.1 Setup menu</b></li> </ul>

### 5.1.17 CR Maintenance menu

Performs maintenance.

Used in the following cases.

- Cleaning the cleaning wiper  
 [6.2.4 Cleaning the cleaning wiper](#)
- Cleaning around the print head  
 [6.2.6 Cleaning around the print head](#)
- Replacing Cutter  
 [6.1.3 Replacing Cutter](#)

Setup item	Setting	Description
CR Maintenance	Start	Performs maintenance. <ul style="list-style-type: none"> <li>• [Enter] key: Print head moves to the left. Cleaning wiper rises.</li> </ul>
		The following content is displayed on Operation panel. “CR Maint.: End” <ul style="list-style-type: none"> <li>• [Enter] key: Cleaning wiper returns to the original position. Print head returns to the original position.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: shifts to the previous menu without maintenance.</li> </ul>  <a href="#">5.1 Setup menu</a>
	—	<ul style="list-style-type: none"> <li>• Perform the pumping operation (start/stop) by pressing the “-” key while displaying “CR Maint.: End”.</li> </ul>

### 5.1.18 Initialization menu

Returns the settings of the printer to default.

Setup item	Setting	Description
Initialization	ALL	All settings can be returned to factory default.
	User Type	The setting of the User Type is returned to factory default.
	Except User Type	The setting other than the User Type is returned to factory default.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: “Initial. Parameter? No” is displayed on the operation panel. Select “Yes”, then press [Enter] key, and the printer initializes the setting.</li> <li>• [Cancel] key: shifts to the previous menu without initialization.</li> </ul>  <a href="#">5.1 Setup menu</a>

### 5.1.19 IP Address menu

Sets the IP address of the printer.

#### NOTE

- Be sure to set the IP address after consulting the network administrator.

Setup item	Setting	Description
IP Address	000.000.000.000 to <192.168.001.253> to 255.255.255.255	Change the IP address by operating the following keys. <ul style="list-style-type: none"> <li>• [+] key: increases the setting value.</li> <li>• [-] key: decreases the setting value.</li> <li>• [Enter] key: changes the setting for the next segment.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: saves the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

### 5.1.20 Subnet Mask menu

Sets the subnet mask of the printer.

#### NOTE

- Be sure to set the subnet mask after consulting the network administrator.

Setup item	Setting	Description
Subnet Mask	000.000.000.000 to <255.255.255.000> to 255.255.255.255	Change the subnet mask by operating the following keys. <ul style="list-style-type: none"> <li>• [+] key: increases the setting value.</li> <li>• [-] key: decreases the setting value.</li> <li>• [Enter] key: changes the setting for the next segment. In the 4th segment, it saves the setting and shifts to the previous menu.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <a href="#">5.1 Setup menu</a>

### 5.1.21 Gateway menu

Sets the gateway.

**NOTE**

- Be sure to set the gateway after consulting the network administrator.

Setup item	Setting	Description
Gateway	000.000.000.000 to <192.168.001.254> to 255.255.255.255	Change the gateway by operating the following keys. <ul style="list-style-type: none"> <li>• [+] key: increases the setting value.</li> <li>• [-] key: decreases the setting value.</li> <li>• [Enter] key: changes the setting for the next segment. In the 4th segment, it saves the setting and shifts to the previous menu.</li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">🔍 5.1 Setup menu</a>

## 5.1.22 Header Dump menu

This function is to specify whether to print the following information (dump data) of print data.

- Data header
- Data dot number (printed only when Header dump setting is “On”)
- Printing date and time
- Printer serial number
- Firmware version
- Receiving time (printed only when Header dump setting is “Dump”)
- Receiving size (printed only when Header dump setting is “Dump”)

### NOTE

- The dump data will be used as a reference material to receive technical supports.

### TIP

When a print is executed in connection with computer, the setting of RIP software will be printed in the “Data Header”.

Setup Item	Set Value	Description
Header Dump	<Off>	<ul style="list-style-type: none"> <li>• Only a print data will be printed.</li> <li>• Dump data will not be printed.</li> </ul>
	On	After printing of print data, the dump data will be printed.
	Dump	<ul style="list-style-type: none"> <li>• Only a dump data will be printed, but the “Number of Dot in Data” will not be printed.</li> <li>• Print data will not be printed.</li> </ul>
	Print	Prints the last header dump. If no history is available, “No Print Data” will appear on the operation panel.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul>  <b>5.1 Setup menu</b>

### 5.1.23 Start Feed Menu

If you set the start feed beforehand, you can change the margins between the print results.

Setup Item	Description	Setup Item
Start Feed	-10 mm to <0 mm> to 500 mm	<ul style="list-style-type: none"> <li>When the value is bigger than 0: the margins are bigger than when it is set to "0".</li> <li>When the value is 0: the margin between print results does not change.</li> <li>When the value is smaller than 0: the margins are smaller than when it is set to "0".</li> </ul>
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">🔗 5.1 Setup menu</a>

#### NOTE

- When the media roll surface becomes wavy due to the influence of the pre-heater, set a wider margin before printer starts to stop the degradation of print quality.
  - When using the take-up device and setting the "Start Feed" as less than 0, set the "Page Gap" as "Narrow". If it is set as "Normal", the settings for "Start Feed" is not applied correctly.
- [🔗 5.1.6.2 Page Gap menu](#)

### 5.1.24 Alert Buzzer menu

Selects how to turn off the printer beep sound when an error occurs.

For unattended printing, you can select "Off" setting to avoid continuous buzzer beep.

Setup item	Setting	Description
Alert Buzzer	<On>	Press any key on Operation panel to turn off beep sound. This is the initially set value.
	Off	After several beeps, the printer automatically turns off beep sound.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">🔗 5.1 Setup menu</a>

## 5.1.25 Front Interlace Menu

This menu is used to set media edge treatment menu. Select Auto under normal condition.

Setup item	Setting	Description
FrontInterlace	<Auto>	Performs media edge treatment automatically when required.
	Off	Media edge treatment is not performed.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> <a href="#">🔗 5.1 Setup menu</a>

### NOTE

To set Paper Interlace OFF, set the “FrontInterlace” setting value as ON (display) in the Menu Option menu, and then change the set values of “FrontInterlace” from the Setup menu.

[🔗 5.4 Menu Option menu](#)

## 5.1.26 Select Nozzle menu

If missing lines still persist after several attempts of cleaning, you can check the nozzle conditions by printing the select nozzle patterns and choose only good nozzles for printing.

Setup item	Setting	Description
Select Nozzle	Print	Print the select nozzle patterns and find the pattern that does not have missing lines. <ul style="list-style-type: none"> <li>• [Enter] key: “Printing” is displayed on the operation panel and Print the select nozzle patterns starts.</li> </ul>
	Settings	Goes to the nozzle settings menu. <ul style="list-style-type: none"> <li>• [Enter] key: shifts to the sub menu.</li> </ul> <a href="#">☞ 5.1.26.1 Nozzle Settings menu</a>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting value and shifts to the previous menu.</li> </ul> <a href="#">☞ 5.1 Setup menu</a>

### 5.1.26.1 Nozzle Settings menu

Setup item	Setting	Description
Settings	Nozzle ALL	Using all of the nozzles on the print head.
	Nozzle A to F	Choose from A to F for the pattern that does not have missing lines.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting value and shifts to the previous menu.</li> </ul> <a href="#">☞ 5.1 Setup menu</a>

## 5.2 Test Print Menu

Performs nozzle check of the print head and setup list.

### NOTE

When the selected print mode of the user type is Quality or Production, Palette menu is not displayed.

☞ [5.1.1.1.1 Print Mode menu](#)

### TIP

•Refer to the following for the operation procedure of test print.

☞ [3.5 Test print](#)

Setup item	Description
Nozzle Check	Perform the nozzle check printing. It is used to check whether there are any clogged heads, or missing or blurred prints. ☞ <a href="#">3.5.1 Nozzle check</a> Print a nozzle check pattern selected from Nozzle setting menu. ☞ <a href="#">5.1.26.1 Nozzle Settings menu</a>
Nozzle Check	Perform the nozzle check printing. It is used to check whether there are any clogged heads, or missing or blurred prints. ☞ <a href="#">3.5.2 Nozzle check F</a> Print a nozzle check pattern using all of the nozzles on the print head.
Mode Print	Mode print can be performed. Used to confirm the following printing conditions. <ul style="list-style-type: none"> <li>• Print quality</li> <li>• Effect</li> <li>• Pre-heater temperature</li> <li>• Platen heater temperature</li> <li>• Dryer temperature</li> <li>• Adjustment value</li> </ul> ☞ <a href="#">3.5.3 Mode print</a>
Setup List	Setup list printing is performed. Used to check the setup item and the user type. ☞ <a href="#">3.5.4 Setup print</a>
Palette	Palette print is executed for the color demonstration. ☞ <a href="#">3.5.5 Palette print</a>
—	<ul style="list-style-type: none"> <li>• [Enter] key: “Printing” is displayed on the operation panel and test printing starts.</li> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> ☞ <a href="#">5 Panel setup menu</a>

## 5.3 Cleaning menu

Performs head cleaning.

### TIP

- Head cleaning can be operated when the printer is Normal.  
Refer to the following for operation procedures.

☞ [6.2.3 Head cleaning](#)

Setup item	Description
Short	Discharges smaller amount of ink compared to “Normal”.
Normal	Select this mode normally.
Long	Discharges larger amount of ink compare to “Normal”. Used when the print head does not improve by normal Head cleaning.
Little Charge	Discharges larger amount of ink compare to “Long”. Charge a small amount of ink when printing is not stable after initial ink charge. ☞ <a href="#">3.3 Installing ink cartridges</a>
Initial Charge	Perform this when using the high capacity pack adapter for the first time, for the printer whose ink is charged. ☞ <a href="#">3.3.3 When using the high capacity pack adapter for the printer whose ink is charged for the first time</a>
—	<ul style="list-style-type: none"> <li>• [Enter] key: “Cleaning **%” is displayed on the operation panel and Head cleaning starts. Progress on the Head cleaning is displayed in % on the operation panel.</li> <li>• [Cancel] key: shifts to the previous menu.</li> </ul> ☞ <a href="#">5 Panel setup menu</a>

## 5.4 Menu Option menu

Sets up the contents of the Setup menu.

You can make setup items that you do not normally use invisible.

Switch the setting “On (displayed)” to “Off (undisplayed)” using the [<] key or [>] key on the operation panel.

When the setting is On, “\*” is displayed on the operation panel.

### NOTE

- Even if you select “Off” in the Menu Option menu, you can display the settings temporarily by selecting “Temporary” in the Setup menu.

 [5.1 Setup menu](#)

Setup item	Setting	Description
User Type	Off	Sets up whether to display the User Type menu.
	<On>	
Spitting	Off	Sets up whether to display the Spitting menu.
	<On>	
Side Margin	Off	Sets up whether to display the Side Margin menu.
	<On>	
Media Initial	Off	Sets up whether to display the Media Initial menu.
	<On>	
MediaWidth	Off	Sets up whether to display the MediaWidth menu.
	<On>	
Output Mode	Off	Sets up whether to display the Output Mode menu.
	<On>	
Method of Cut	Off	Sets up whether to display the Method of Cut menu.
	<On>	
Origin	Off	Sets up whether to display the Origin menu.
	<On>	
Prev. Stick	Off	Sets up whether to display the Prev. Stick menu.
	<On>	
Standby Heating	Off	Sets up whether to display the StandbyHeating menu.
	<On>	
Head Travel	Off	Sets up whether to display the Head Travel menu.
	<On>	
Multi Strike	Off	Sets up whether to display the Multi Strike menu.
	<On>	

Setup item	Setting	Description
Strike Wait	Off	Sets up whether to display the Strike Wait menu.
	<On>	
Slant Check	Off	Sets up whether to display the Slant Check menu.
	<On>	
Auto Cleaning	Off	Sets up whether to display the Auto Cleaning menu.
	<On>	
Longstore	Off	Sets up whether to display the Longstore menu.
	<On>	
CR Maintenance	Off	Sets up whether to display the CR Maint. menu.
	<On>	
Initialization	Off	Sets up whether to display the Initialization menu.
	<On>	
IP Address	Off	Sets up whether to display the IP Address menu.
	<On>	
Subnet Mask	Off	Sets up whether to display the subnet mask.
	<On>	
Gateway	Off	Sets up whether to display the Gateway menu.
	<On>	
Header dump	Off	Specify whether to display the header dump menu.
	<On>	
Start Feed	Off	Sets up whether or not to display the Start Feed menu
	<On>	
Alert Buzzer	Off	Set whether or not to display the Alert Buzzer menu.
	<On>	
FrontInterlace	Off	Sets up whether to display the FrontInterlace menu.
	<On>	
Select Nozzle	Off	Sets up whether to display the Select Nozzle menu.
	<On>	
ALL On		Displays all items in the Setup menu. <ul style="list-style-type: none"> <li>Pressing the [Enter] key displays “*” for all items in the Menu Option menu.</li> </ul>
ALL Off		No items in the Setup menu are displayed. <ul style="list-style-type: none"> <li>Pressing the [Enter] key deletes “*” for all items in the Menu Option menu.</li> <li>Even if you select “ALL Off”, you can display the items temporarily by selecting “Temporary” in the Setup menu.</li> </ul>
—		<ul style="list-style-type: none"> <li>[Cancel] key: saves the setting and shifts to the previous menu.</li> </ul>  <b>5 Panel setup menu</b>

## 5.5 System Information menu

Display the system information on your printer.

Setup item	Setting	Description
Ver. M/C	*.***(Main side)/ *.***(Controller side)	Displays the versions of the firmware of the main side (M) and controller side (C).
Model	*****	Displays the model name of your printer.
Serial	*****	Displays your printer's serial number.
T. Area	*****m2	Displays total printed area in the printer since the purchase. This information may be used for reference for maintenance.
Ink Status	—	Displays the various information (ink status) about ink cartridges that are installed in the slots and information about Smart/C. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.   <a href="#">5.5.1 Ink Status menu</a></li> </ul>
Life Times	—	Displays the operational life time of each part. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.   <a href="#">5.5.2 Life Times menu</a></li> </ul>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.   <a href="#">5 Panel setup menu</a></li> </ul>

### 5.5.1 Ink Status menu

Displays the various information of smart chips.

#### NOTE

- To display the various information of Smart chips, use genuine SIGNWarehouse-approved ink and S/C cards. If ink other than genuine ink cartridges are used, the ink status will not be displayed correctly.

Setup item	Setting	Description
KCMY	0 to 100 (unit: %)	The amount of ink remaining in each ink cartridge of K/C/M/Y is displayed. <ul style="list-style-type: none"> <li>If it is blinking at 10%, smartchip recovery is being performed on the corresponding ink cartridge.   <a href="#">7.4 Smartchip Recovery</a></li> </ul>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.   <a href="#">5.1 Setup menu</a></li> </ul>

## 5.5.2 Life Times menu

Displays the operational life time of each part.

Setup item	Setting	Description
Head	E*****F	Display the operational life of each part. •The lifetime of each part is indicated by the asterisks (Maximum 5 asterisks: 100% left). • As the part deteriorates, the number of asterisks decreases one by one (20 %). • The part should be changed when all of the asterisks have disappeared, and “Change” is displayed. Contact your local MUTOH dealer to ask for replacing parts.
Pump	E*****F	
CR Motor	E*****F	
PF Motor	E*****F	
	—	• [Cancel] key: shifts to the previous menu. 🔑 <a href="#">5.1 Setup menu</a>

## 5.6 Sleep Mode menu

Sleep mode settings are configured.

When you activate sleep mode, the printer operates as follows.

- The vacuum fan stops.
- All heaters stop.
- All lamps turn off except for the power lamp.
- Automatic head cleaning is performed after the time set in the Timer Setting Menu has elapsed.

🔑 [5.6.1 Timer Setting menu](#)

### TIP

- The cleaning mode reflects the settings in the operation panel.

🔑 [6.2.3 Head cleaning](#)

Setup item	Setting	Description
Sleep Mode	Set Timer	Set the auto cleaning interval of this printer for Sleep Mode. 🔑 <a href="#">5.6.1 Timer Setting menu</a>
	Start	Activate Sleep Mode 🔑 <a href="#">5.6.2 Sleep Mode Start menu</a>
	—	• [Cancel] key: shifts to the previous menu. 🔑 <a href="#">5.1 Setup menu</a>

## 5.6.1 Timer Setting menu

Set the head cleaning interval of this printer for Sleep Mode.

When more than the set time has passed, the print head is cleaned automatically.

### NOTE

- During Sleep Mode, even if the set amount of time has passed, print-head cleaning is not performed under the following circumstances.
- The front cover is open.
- Maintenance cover is open.
- The media loading lever is raised.
- The waste fluid tank is full.
- The ink cartridge is empty.
- The ink cartridge has been removed.
- An object other than an appropriate ink cartridge is inserted in the cartridge slot, etc.

When the printer returns to a normal state, head cleaning is restarted, and Sleep Mode continues.

 [7.2 Error messages](#)

- If one of the above conditions occurs during head cleaning, cleaning is stopped.
- When the printer returns to a normal state, head cleaning is restarted.

 [7.2 Error messages](#)

Setup item	Setting	Description
Set Timer	1 hour	When the set time has elapsed, the head cleaning starts.
	2 hours	
	3 hours	
	4 hours	
	5 hours	
	<6 hours>	
	9 hours	
	12 hours	
	18 hours	
	24 hours	
	—	

## 5.6.2 Sleep Mode Start menu

### Activate Sleep Mode

During Sleep Mode, “Restart → Enter” will be displayed in the operation panel.

During Sleep Mode, pressing [Enter] key will return the printer to normal operation.

#### NOTE

- If the printer is under one of the following conditions while shifting to the Sleep Mode, “Don’t Start Sleep Mode” is displayed, and will not shift to the Sleep Mode.
  - The front cover is open.
  - Maintenance cover is open.
  - The media loading lever is raised.
  - The waste fluid tank is full.
  - The ink cartridge is empty.
  - The ink cartridge has been removed.
  - An object other than an appropriate ink cartridge is inserted in the cartridge slot, etc.

Activate Sleep Mode again after returning the printer to a normal state.

#### 7.2 Error messages

- If the printer is under one of the conditions above during the Sleep mode, the printer will not return to the Normal condition even pressing the [Enter] key.  
Return the printer to a normal state, and press the [Enter] key to return the printer to normal operation.

#### 7.2 Error messages

Setup item	Setting	Description
Start	Start Sleep Mode?	<ul style="list-style-type: none"> <li>• [Enter] key: activates Sleep Mode.</li> <li>• [Cancel] key: shifts to the previous menu without activating Sleep Mode.</li> </ul>  <b>5.6 Sleep Mode menu</b>
	Restart → Enter	The printer is in Sleep Mode. <ul style="list-style-type: none"> <li>• [Enter] key: return the printer to normal operation.</li> </ul>

## 5.7 Display menu

Sets the language and unit displayed on the LCD monitor of the operation panel.

Setup item	Setting	Description
Display	Language	Sets the language used in the menu items displayed on the LCD monitor of the operation panel. ☞ <a href="#">5.7.1 Language menu</a>
	Temperature	Sets the unit of temperature display. ☞ <a href="#">5.7.2 Temperature menu</a>
	Length	Sets the unit to display the length. ☞ <a href="#">5.7.3 Length menu</a>
	Remain Ink	Sets whether to display the ink level indicator. ☞ <a href="#">5.7.4 Remain Ink menu</a>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: shifts to the previous menu.</li> </ul> ☞ <a href="#">5 Panel setup menu</a>

### 5.7.1 Language menu

Sets the language used in the menu items displayed on the LCD monitor of the operation panel.

Setup item	Setting	Description
Language	<English>	Displays the menu items in English.
	Japanese	Displays the menu items in Japanese.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> ☞ <a href="#">5.7 Display menu</a>

### 5.7.2 Temperature menu

Sets the unit of temperature display.

Setup item	Setting	Description
Temperature	<Celsius [°C]>	Displays the temperature in Celsius [°C].
	Fahrenheit [°F]	Displays the temperature in Fahrenheit [°F].
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.</li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> ☞ <a href="#">5.7 Display menu</a>

### 5.7.3 Length menu

Sets the unit to display the length.

Setup item	Setting	Description
Length	<mm>	Displays the length in millimeters (mm).
	inch	Displays the length in inches (inch).
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">☞ 5.7 Display menu</a>

### 5.7.4 Remain Ink menu

Sets whether to display the ink level indicator.

Setup item	Setting	Description
Remain Ink	On	Displays the ink level indicator. Refer to the following for the details. <a href="#">☞ 2.1.4 Ink level indicator</a> <a href="#">☞ 2.1.4.1 Estimated Ink level graphic</a>
	<Off>	The ink level indicator is not displayed.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.</li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">☞ 5.7 Display menu</a>

## 5.8 Job Status Menu

Various information of previous print will be displayed.

The length of printed data and if the print is completed will be displayed. When the print is canceled, the information how much the print is completed will be displayed.

Setup item	Setting	Description
Job Status	JobStatus	Displays if the print is completed. <ul style="list-style-type: none"> <li>• When the print is completed: “Completed”</li> <li>• When the print is canceled: “Canceled”</li> </ul>
	ToDoLength	The total length of print data (media feeding direction) will be displayed.
	Done	The printed length will be displayed.
	Remain	The remaining length of print data will be displayed.
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">☞ 5 Panel setup menu</a>

### TIP

- This function is to check the information of print data with the print operation is completed. For the details on data while printing, please refer to the below.
  - ☞ [4.4.6.2 Settings that can be changed or confirmed while printing](#)
  - ☞ [4.4.9 Normal Display while Printing](#)
- The values displayed in this function are just standard values, not guarantee the accuracy.
- If the print data includes no length data, all information will be displayed as “0”.

## 5.9 Roll Length Manage menu

Before replacing with another roll media, you can print the remaining roll length information on the roll media.

This information can be printed with a code that your printer can read. The next time when the roll media is loaded, your printer will read the code and will automatically specify the Roll Length settings.

Setup item	Setting	Description
Roll Length Manage	Print	Print the remaining length management information with text and code on the roll media. <ul style="list-style-type: none"> <li>[Enter] key: "Cut Media? No" is displayed on the operation panel. Select "Yes" or "No", then press [Enter] key, and print starts.</li> </ul> <a href="#">🔑 5.9.1 Print menu</a>
	Simple Print	Print the remaining length management information with text only on the roll media. <ul style="list-style-type: none"> <li>[Enter] key: "Cut Media? No" is displayed on the operation panel. Select "Yes" or "No", then press [Enter] key, and print starts.</li> </ul> <a href="#">🔑 5.9.2 Simple Print menu</a>
	Scan	Your printer can scan the remaining length management code that was printed on a roll media with "Print". <ul style="list-style-type: none"> <li>[Enter] key: "Please wait" is displayed on the operation panel, then scan starts.</li> </ul> <a href="#">🔑 5.9.3 Scan menu</a>
	Roll Length	Sets up the roll media length. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul> <a href="#">🔑 5.9.4 Roll Length menu</a>
	Auto Scan	Goes to the auto scan menu. <ul style="list-style-type: none"> <li>[Enter] key: shifts to the sub menu.</li> </ul> <a href="#">🔑 5.9.5 Auto Scan menu</a>
	—	<ul style="list-style-type: none"> <li>[Cancel] key: cancels the setting and shifts to the previous menu.</li> </ul> <a href="#">🔑 5.1 Setup menu</a>


### NOTE

- The Roll Length Manage menu will not be displayed if "Media Initial" is set to "Off".  
[🔑 5.1.4 Media Initial menu](#)
- The Roll Length Manage menu will not be displayed if the media is not loaded.


## 5.9.1 Print menu

Follow the procedure below to print.


1. Turn ON the printer and load the media.
  - ☞ **3.4.2 Setting Roll Media**
2. Display the Roll Length Manage menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

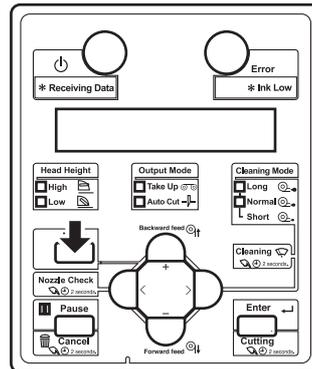

- “Menu 1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [+] key or [-] key to select “Menu9: RollLengthMan>”.

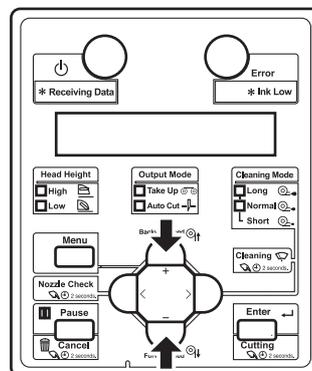


- c. Press the [>] key on the operation panel.

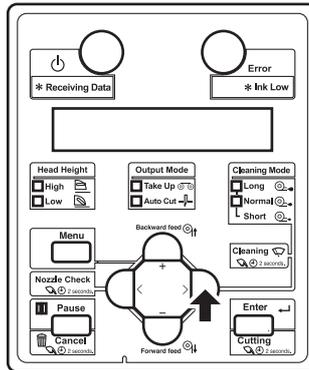

- “Roll1: Print” is displayed on the operation panel.

- d. Press the [Enter] key on the operation panel.

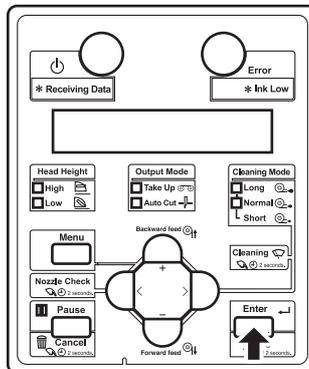


- “Cut Media? No” is displayed on the operation panel.

#### NOTE

- If you want to cut the media, press the [+] key or [-] key to select “Yes”, then press [Enter] key.

- e. Press the [Enter] key on the operation panel.

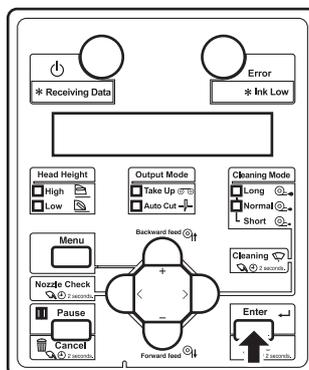

- “Printing” is displayed on the operation panel, then start printing.

**NOTE**

- The printer is unable to print this information if "Roll Length" is set to "Off".  
↳ [5.9.4 Roll Length menu](#)
- This menu will print the following information:
  - Type of roll media
  - Remaining roll length
  - Date printed
  - Remaining length management code




- "Roll 1: Print" or "Roll 2: Simple Print" requires at least 400 mm printable width. Before printing, make sure that there is sufficient width on the media.  
If printable width is less than 400 mm, your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.  
↳ [5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)


## 5.9.2 Simple Print menu

Follow the procedure below to simple print.


1. Turn ON the printer and load the media.
  - **3.4.2 Setting Roll Media**
2. Display the Roll Length Manage menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

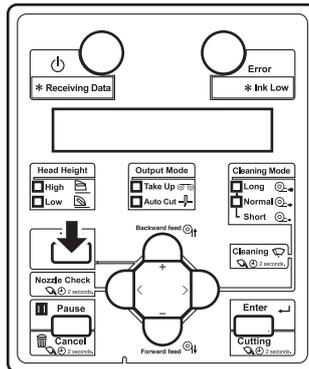

- “Menu 1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [+] key or [-] key to select “Menu9: RollLengthMan>”.

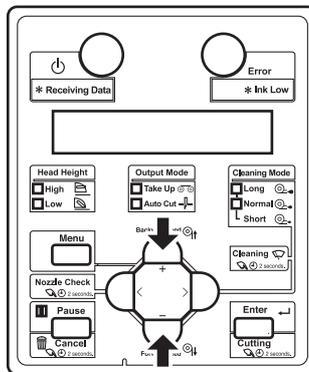


- c. Press the [>] key on the operation panel.

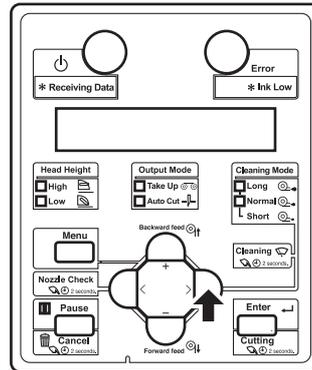


- “Roll1: Print” is displayed on the operation panel.

- d. Press the [+] key or [-] key to select “Roll2: Simple Print”.

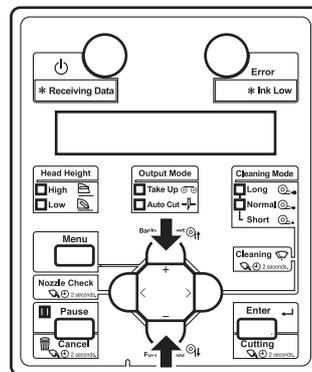

- e. Press the [Enter] key on the operation panel.

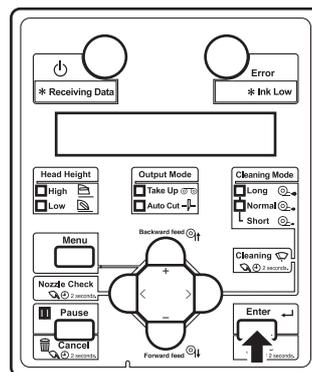


- “Cut Media? No” is displayed on the operation panel.

#### NOTE

- If you want to cut the media, press the [+] key or [-] key to select “Yes”, then press [Enter] key.


- f. Press the [Enter] key on the operation panel.

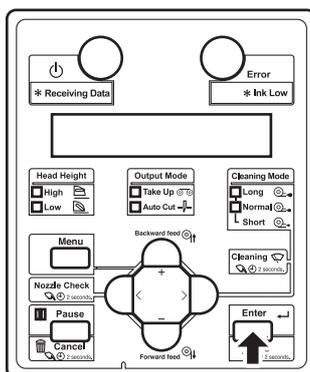

- “Printing” is displayed on the operation panel, then start printing.

#### NOTE

- The printer is unable to print this information if "Roll Length" is set to "Off".  
[🔗 5.9.4 Roll Length menu](#)
- This menu will print the following information:
  - Type of roll media
  - Remaining roll length
  - Date printed

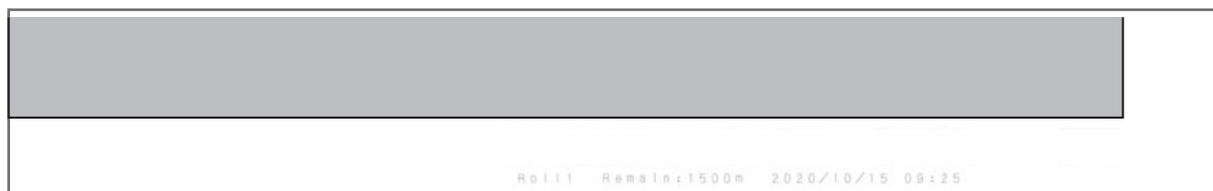

- "Roll 1: Print" or "Roll 2: Simple Print" requires at least 400 mm printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 400 mm, your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.  
[🔗 5.1.3 Side Margin menu](#), [5.1.5 Media Width menu](#), [5.1.8 Origin menu](#)


### 5.9.3 Scan menu

Follow the procedure below to scan the remaining length management code.


1. Turn ON the printer and load the media that the remaining length management code has been printed on it.

#### 3.4.2 Setting Roll Media


- Check that the code printed on the media has passed through the pressurizing rollers.
2. Display the Roll Length Manage menu on the operation panel.
    - a. Press the [Menu] key on the operation panel.

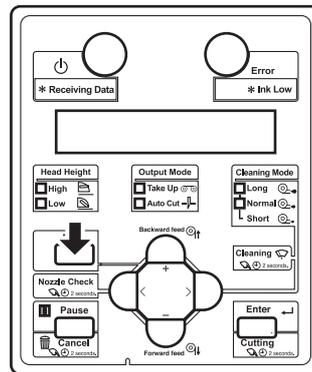

- “Menu 1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [+] key or [-] key to select “Menu9: RollLengthMan>”.

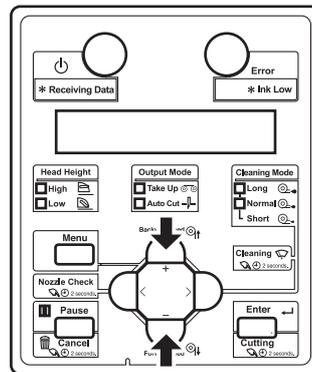


- c. Press the [>] key on the operation panel.

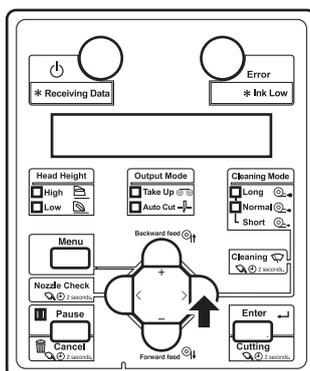


- “Roll1: Print” is displayed on the operation panel.

- d. Press the [+] key or [-] key to select “Roll3: Scan”.

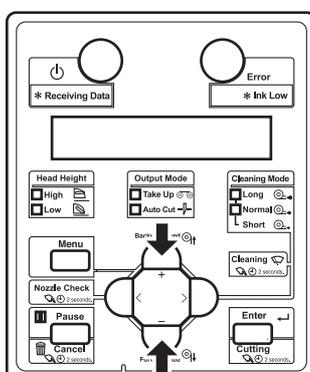

- e. Press the [Enter] key on the operation panel.

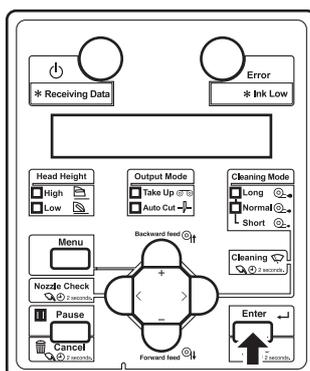

- “Please wait” is displayed on the operation panel.

- The printer scans the print using the embedded color sensor, then automatically sets up the roll media length.
  - Once successfully completed, the roll media length is displayed on the operation panel. Press the [Enter] key on the operation panel and the display shifts to Normal.
  - If failed, the message “Scan Failed ->Enter” will appear on the panel. Press the [Enter] key, and the operation panel shifts to the Roll Length menu display.

**NOTE**

- The printer may fail to scan if a remaining length management code has dirt or fold marks on it.
- Your printer is unable to scan if "Output Mode" is set to "Take-Up".  
 [5.1.6 Output Mode menu](#)
- In case the printer failed to scan the code, manually specify the Roll Length settings based on the remaining length management information printed in text on the media.  
 [5.9.4 Roll Length menu](#)

## 5.9.4 Roll Length menu

Sets up the roll media length.

Setup item	Setting	Description
Roll media	<Off>	Roll Length is not used. <ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the previous menu.   <a href="#">5.9 Roll Length Manage menu</a></li> </ul>
	Roll1	Sets up the roll media length. The set values of the roll media length can be set as "Roll1" to "Roll3". <ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.   <a href="#">5.9.4.1 Roll Length menu</a></li> </ul>
	Roll2	
	Roll3	
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.   <a href="#">5.9 Roll Length Manage menu</a></li> </ul>

### 5.9.4.1 Roll Length menu

Sets up the roll media length.

#### NOTE

- After replacing the roll media, set the roll media length again.  
If the roll media length is not set, the residual quantity of roll media may not be displayed correctly.

Setup item	Setting	Description
Length	1 m to <30 m> to 200 m	Sets the roll media length.
	—	<ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.   <a href="#">5.9.4.2 Print Stop menu</a></li> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.   <a href="#">5.9.4.1 Roll Length menu</a></li> </ul>

### 5.9.4.2 Print Stop menu

You can set whether or not to display “Roll Remain Error” and pause printing when the length of the roll media that is counted inside the printer becomes 0.

#### NOTE

- Normally you can set this as “Off” as the rear sensor detects when the roll paper is finished.
- If you are using the roll media that does not come off the paper core easily when it is finished, printing may not be paused when the roll media is finished, if the print pause menu is set to “Off”. If this happens, set this to “On”.
- When “Roll Remain Error” or “Roll Near End” has occurred while the Print Pause menu is set to “On”, if you lower the media set lever after replacing to the new roll media, the Roll Media Length Setting menu is displayed. Enter the length of the roll media you have set.

Setup item	Setting	Description
Print Stop	<Off>	The roll media remaining count is not used to judge for pausing printing. Printing pauses when the rear sensor responds. <ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.   <a href="#">5.9.4 Roll Length menu</a></li> </ul>
	On	Even when the rear sensor does not respond, printing pauses when the roll media remaining count becomes 0. <ul style="list-style-type: none"> <li>• [Enter] key: saves the setting and shifts to the sub menu.   <a href="#">5.9.4.3 Near End menu</a></li> </ul>
	—	<ul style="list-style-type: none"> <li>• [Cancel] key: cancels the setting and shifts to the previous menu.   <a href="#">5.9.4 Roll Length menu</a></li> </ul>

### 5.9.4.3 Near End menu

You can display “Roll Near End: \*m” (\* is replaced with a number between 1 and 10) before the length of the roll media that is counted inside the printer becomes 0.

Setup item	Setting	Description
Near end	<Off>	“Near end” is not displayed.
	Remain: 10 m to 1 m	“Near end” is displayed when the remaining count for the roll media becomes the length you selected.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.  <a href="#">☞ 5.9.4 Roll Length menu</a></li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.  <a href="#">☞ 5.9.4.2 Print Stop menu</a></li> </ul>

### 5.9.5 Auto Scan menu

The ON setting will automatically scan the remaining length management code when

- the printer is powered on.
- you replace a roll media.

Setup item	Setting	Description
Auto Scan	<Off>	Auto Scan is not performed.
	On	Auto Scan is performed.
	—	<ul style="list-style-type: none"> <li>[Enter] key: saves the setting and shifts to the previous menu.  <a href="#">☞ 5.9 Roll Length Manage menu</a></li> <li>[Cancel] key: cancels the setting and shifts to the previous menu.  <a href="#">☞ 5.9 Roll Length Manage menu</a></li> </ul>

#### NOTE

- The printer may fail to scan if a remaining length management code has dirt or fold marks on it.
- Your printer is unable to scan if "Output Mode" is set to "Take-Up".  
[☞ 5.1.6 Output Mode menu](#)
- In case the printer failed to scan the code, manually specify the Roll Length settings based on the remaining length management information printed in text on the media.  
[☞ 5.9.4 Roll Length menu](#)

## 6 Maintenance

This chapter describes daily maintenance of the product.

## 6.1 Replacing consumable components

This section describes the replacement time and steps of ink cartridge (or ink bags), roll media, razor blade.

### 6.1.1 Replacing ink cartridges

This section describes when to replace the ink cartridges.

#### (1) Replacement time

- a. When “[\*\*\*\*] Ink Low” is displayed on the operation panel
  - This message is displayed when there is a small amount of ink remaining in the ink cartridge.
  - The alarm buzzer sounds.  
To stop the buzzer, press the [Enter] key on the operation panel.
  - Replace with the new ink cartridge.
- b. When “[\*\*\*\*] Ink End” is displayed on the operation panel
  - This message is displayed when there is no ink remaining in the ink cartridge.
  - The alarm buzzer sounds.  
To stop the buzzer, press the [Enter] key on the operation panel.
  - Immediately replace it with the new ink cartridge.

#### NOTE

- [\*\*\*\*] in the messages for ink cartridge replacement indicates the color that is almost empty or runs out, using the following characters.
    - K: Black
    - C: Cyan
    - M: Magenta
    - Y: Yellow
  - Do not insert or remove the ink cartridge except at the time of replacement. Inserting or removing the ink cartridge mixes air into the ink tube, and failures such as nozzle clogging trouble may occur.
  - If “Ink End” is displayed, the printing operation stops.
  - If “Ink End” is displayed, you cannot print until inserting the new ink cartridge.
  - If there is no cartridge for replacement at hand, leave the empty ink cartridge inserted in the printer. Leaving the printer with the ink cartridge removed may result in clogging of the print head.
-

## (2) Type

Genuine EnduraINK PRO ink cartridges that are compatible with the printer are as follows.

Description	Part No.
Ink cartridge K (Black: 220 ml)	PRNI-SW-EIP-220-BK-MUT
Ink cartridge C (Cyan: 220 ml)	PRNI-SW-EIP-220-CY-MUT
Ink cartridge M (Magenta: 220 ml)	PRNI-SW-EIP-220-MG-MU
Ink cartridge Y (Yellow: 220 ml)	PRNI-SW-EIP-220-YL-MUT
Ink bag K (Black: 1,000ml)	PRNI-SW-EIP-1000-BK-MUT
Ink bag C (Cyan: 1,000ml)	PRNI-SW-EIP-1000-CY-MUT
Ink bag M (Magenta: 1,000ml)	PRNI-SW-EIP-1000-MG-MUT
Ink bag Y (Yellow: 1,000ml)	PRNI-SW-EIP-1000-YL-MUT

Genuine MUTOH ink cartridges that are compatible with the printer are as follows

Description	Part No.
Ink cartridge K (Black: 220 ml)	VJ-MS31-BK220U
Ink cartridge C (Cyan: 220 ml)	VJ-MS31-CY220U
Ink cartridge M (Magenta: 220 ml)	VJ-MS31-MA220U
Ink cartridge Y (Yellow: 220 ml)	VJ-MS31-YE220U
Ink bag K (Black: 1,000ml)	VJ-MS31-BK1000U
Ink bag C (Cyan: 1,000ml)	VJ-MS31-CY1000U
Ink bag M (Magenta: 1,000ml)	VJ-MS31-MA1000U
Ink bag Y (Yellow: 1,000ml)	VJ-MS31-YE1000U

### NOTE

- To use 1000ml ink bags, high capacity pack adapters (option) are required. For details on high capacity pack adapters, contact SIGNWarehouse Product Support or your PrismJET dealer.
- Use genuine ink cartridges for replacement.  
This printer is designed to use genuine ink cartridges.  
If you use an ink bag that is not approved by SIGNWarehouse Product Support, printing might become blurred, or the end of the ink in the bag might not be detected correctly.
- Any problems caused by using an ink bag other than those recommended above will not be covered by the warranty, and repair expenses will be paid by the customer.

### (3) Replacing steps

Follow the procedure below to replace the ink cartridges and high capacity pack adapter.



#### CAUTION

- **Before operation, make sure to read the Safety Data Sheet (SDS).**
- **Wear protective equipment (gloves, goggles or eye protection, protective mask, protective clothing) when handling ink.**  
**Be cautious that ink does not get into your eye or make a contact with your skin.**
- **When ink gets into your eye or make a contact with your skin, wash with water immediately.**
- **If left as it is, it may cause red eye or light inflammation. If it is necessary, please see your doctor immediately.**
- **Do not disassemble ink cartridges or ink bags.**  
**If disassembled, there is a possibility that ink might come into contact with eyes or skin.**

#### NOTE

- Do not share the ink cartridge once installed with another printer. The cartridge will not be usable from that time onward.
- Do not give ink cartridges or ink bags strong shakes.  
Doing so may cause ink leakage.
- Do not disassemble ink cartridges.  
A disassembled ink cartridge or ink bags cannot be used.
- When an ink cartridge or ink bag is moved from a cold place to warm place, keep the ink cartridge for 3 hours or more in the new printing environment before printing.
- Do not refill an ink cartridge or ink bag with ink.  
It may result in abnormal printing.
- Insert or remove the ink cartridge and high capacity pack adapter at the time of replacement only.  
Inserting or removing the ink cartridge and high capacity pack adapter except at the time of replacement may result in incorrect printing.
- Be sure to use the ink before it expires.  
The expired ink should be disposed of as industrial waste. The empty ink bag should be put in a plastic bag and should be disposed of according to the local regulations.


## a. Replacing 220ml ink cartridges

1. Confirm that the printer is turned ON.

**NOTE**

- Do not replace ink cartridges when the printer is turned OFF.  
The remaining ink may not be detected correctly, causing abnormal printing.

2. Remove the ink cartridge that you want to replace from the slot.

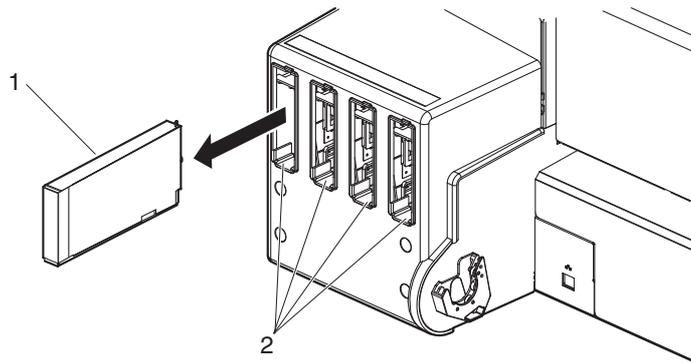

No.	Name
1	Ink cartridge
2	Ink cartridge slots


3. Take out the new ink cartridge from the bag.

**NOTE**

- Open the bag just before attaching the ink cartridge to the ink cartridge slot.  
Leaving the ink cartridge with the bag open for a long time may result in abnormal printing.
- Do not insert or remove the ink cartridge more than 10 times.  
If the ink cartridge has been removed/inserted more than 10 times, it cannot be used even though ink remains.

## 4. Agitate the ink cartridges.

- Turn the ink plug upward and wait for 3 seconds.
- Next, turn the ink plug downward and wait for 3 seconds.
- Repeat that 10 times.

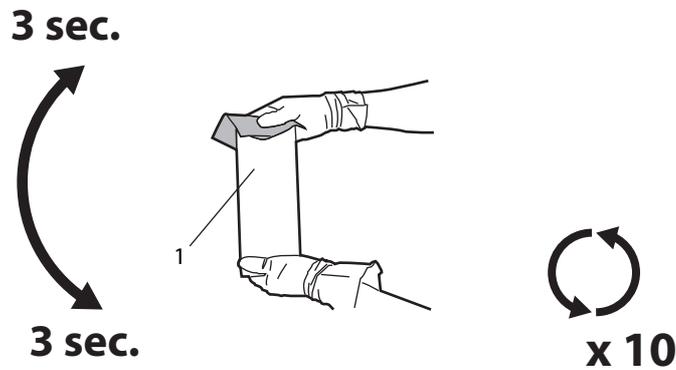

No.	Name
1	Ink cartridge

## 5. Install a new ink cartridge.

## 6. Confirm that the operation panel returns to Normal.

**NOTE**

- If the ink cartridge is replaced during printing, printing resumes.

- Ink cartridge replacement is complete.


## b. Replacing high capacity pack adapter (option)

1. Confirm that the printer is turned ON.

**NOTE**

- Do not replace high capacity pack adapter when the printer is turned OFF. The remaining ink may not be detected correctly, causing abnormal printing.

2. Remove the high capacity pack adapter that you want to replace from the slot.

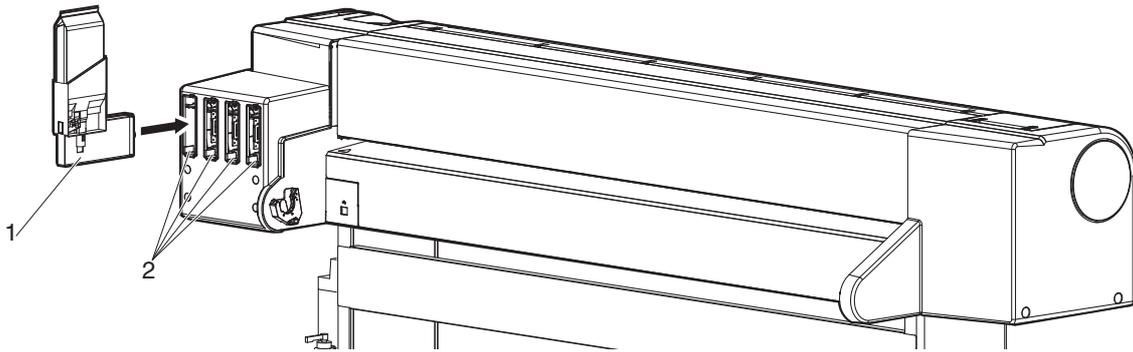

No.	Name
1	High capacity pack adapter
2	Ink cartridge slot

**NOTE**

- Do not remove only ink bag while high capacity pack adapter is installed on the printer. The information of the remaining smart chip card will be rewritten and the ink bag will not be usable.

3. Take out the new ink bag from the bag.

**NOTE**

- Open the bag just before attaching the ink bag to the high capacity pack adapter. Leaving the ink bag with the bag open for a long time may result in abnormal printing.


4. Install the ink bag and smart chip card to high capacity pack adapter.

**NOTE**

- To install or remove the high capacity pack adapter to/from the ink bag and smart chip card, refer to the operation manual included with high capacity pack adapter.

5. Agitate the ink bag.

- To prevent the ink bag and the High capacity ink pack adapter from separating, hold one hand against the top of the ink bag. Rotate the plug of the ink bag vertically and hold for 3 seconds.
- Then, invert the ink bag with the adapter and hold for 3 seconds.
- Repeat that 10 times.

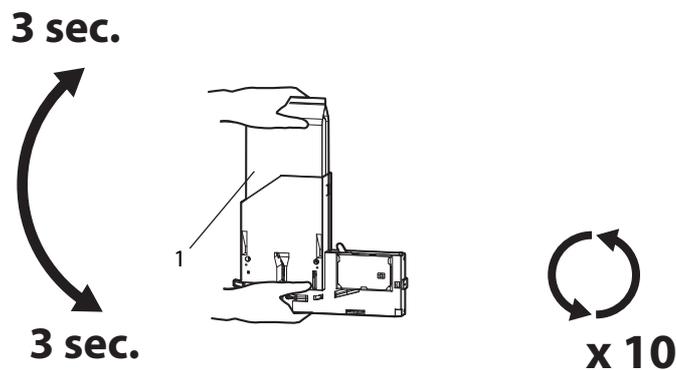

No.	Name
1	Ink bag

6. Insert the High capacity ink pack adapters into Ink cartridge slots.

**NOTE**

- Make sure that the ink bag and smart chip are installed on the high capacity pack adapter before inserting it to the slot. If the high capacity pack adapter is inserted into the slot without the ink bag, the remaining information will be rewritten and the ink bag will not be usable.

- Insert the high capacity pack adapter all the way to the end of the slot.

7. Confirm that the operation panel returns to Normal.

**NOTE**

- If the high capacity pack adapter is replaced during a print job, the printer resumes printing.

- Replacing the high capacity pack adapter is complete.

## 6.1.2 Replacing Roll Media

This section describes when and how to replace the roll media.

### (1) Replacement time

Replace the roll media when the following situation occurs.

- a. When the roll media loaded in the printer runs out
  - “End Of Roll” is displayed on the operation panel.
  - If media runs out during printing, the printer stops printing.
- b. When you want to change the media type to use

### (2) Type


**TIP**

- For types and details of the roll media, refer to “[8.3 Options/Supply list](#)”.

### (3) Replacing steps


Follow the procedure below to replace the roll media.

1. If the printer is turned ON, confirm that operation such as printing is not in progress.
2. Raise the media loading lever.

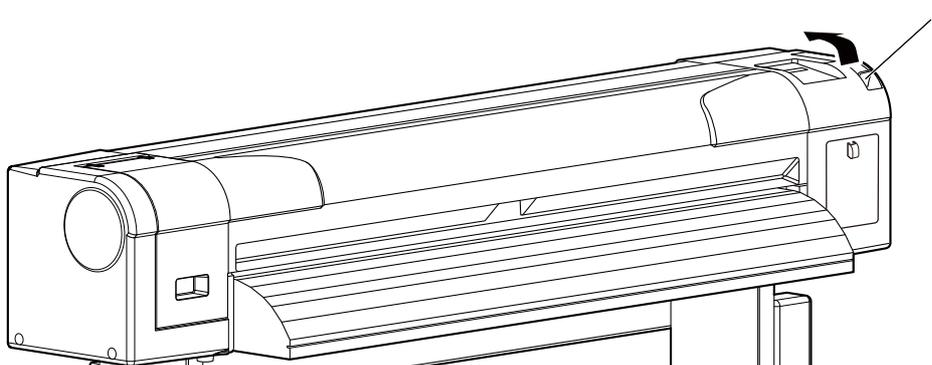


No.	Name
1	Media loading lever

3. Hold the both edges of the scroller to rewind the roll media by hands.

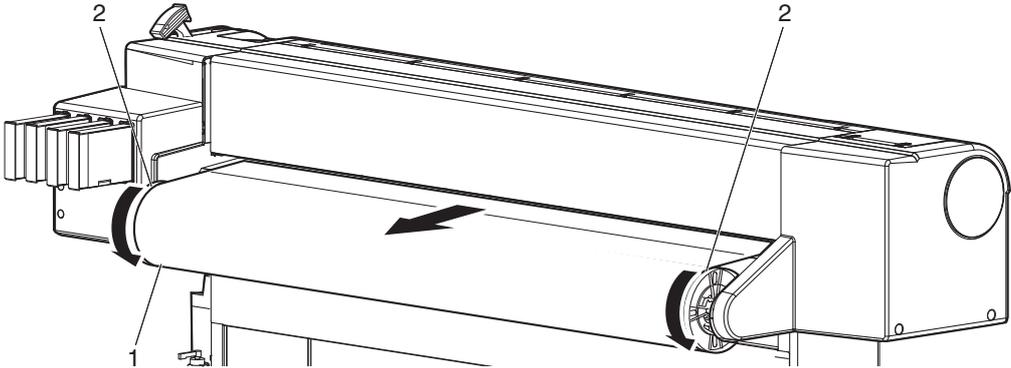

No.	Name
1	Roll media
2	Scroller

4. Remove the scroller unit, and place it on a flat floor.

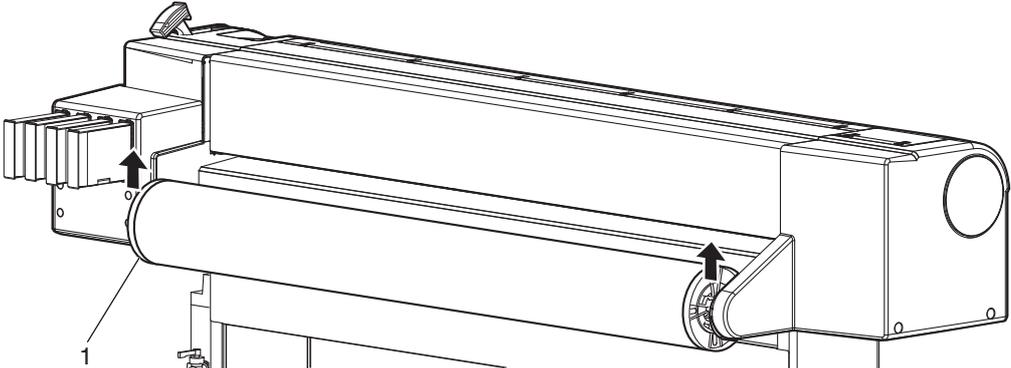


No.	Name
1	Scroller

5. Hold the movable media stopper and lightly tap it as illustrated to remove the movable media stopper.


**NOTE**

- When removing the roll media, do not strike the left edge of the scroller (on the movable media stopper side) strongly on the floor. The left edge of the scroller may be damaged by the impact.

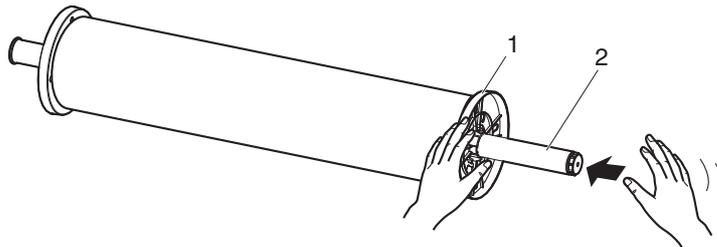

No.	Name
1	Movable media stopper
2	Scroller

6. Remove the roll media from the scroller.

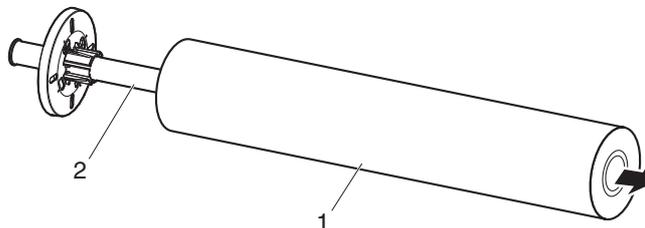


No.	Name
1	Roll media
2	Scroller

7. To load another roll media, refer to the following.

**TIP**

- For loading the roll media, refer to “[3.4 Loading media](#)”.
- For storing the roll media not in use, refer to “[4.2.3 Precaution on storing media after use](#)”.

- 8. When not loading the roll media, install the movable stopper to the scroller and set the scroller to the printer.

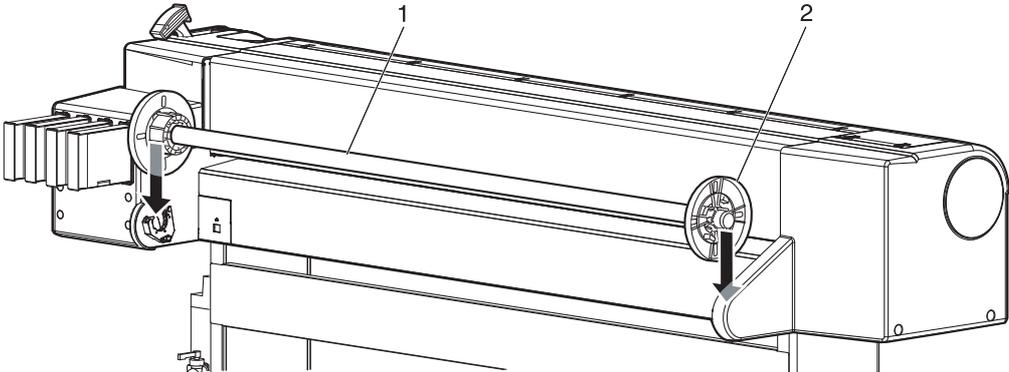

No.	Name
1	Movable media stopper
2	Scroller

### 6.1.3 Replacing Cross-cut Blade

This section describes when and how to replace the cross-cut blade.

#### (1) Replacement time

Replace the cutter blade when the following situation occurs.

- a. When the paper is not cut smoothly
- b. When the cut surface is feathered, etc

#### (2) Type


Our genuine cutter that is compatible with the printer is as follows.

Description	Model No.
Cutter replacement blade	VJ-CB

#### (3) Replacing steps


Follow the procedure below to replace the cutter.

1. If the printer is turned ON, make sure the following.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.
2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

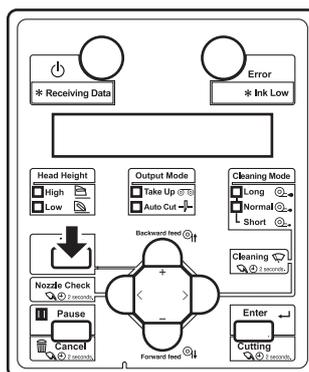


- "Menu 1: Setup>" is displayed on the operation panel.
- The operation panel shifts to the Setup menu display.


- b. Press the [>] key on the operation panel.

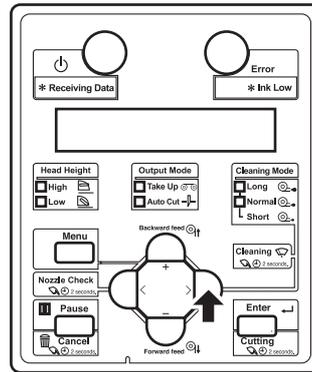

- “Set1: User Type” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

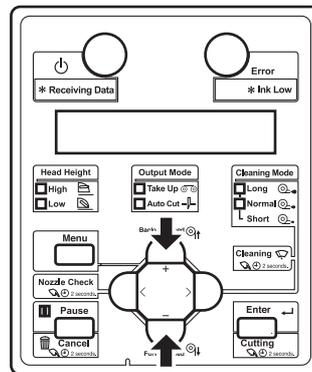


- d. Press the [Enter] key on the operation panel.

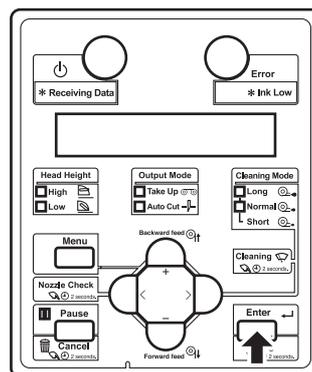


- “CR Maint.: Start” is displayed on the operation panel.
  - The display enters the CR Maintenance menu.
-  [5.1.17 CR Maintenance menu](#)

3. Press the [Enter] key on the operation panel.

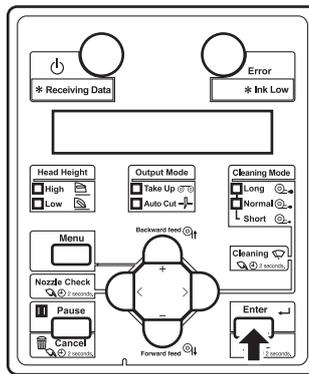

- Maintenance starts.
- The print head moves to the left of the printer (cutter replacement position).
- “CR Maintenance: End” is displayed on the operation panel.

4. Open Maintenance cover L.

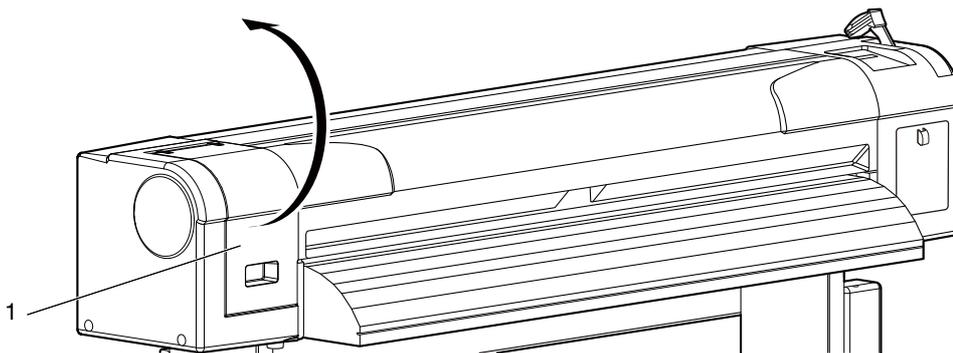

No.	Name
1	Maintenance cover L


**NOTE**

- Replace the cutter in a short time.  
Leaving the print head at the cutter replacement position may result in clogging of the print head.

5. Press the tab of the cutter lightly, turn the cutter holder in the direction as illustrated below.

**NOTE**

- Do not press the tab of the cutter strongly or suddenly let go of it. There is a spring in the cutter holder and it may fly out.
- Do not push the cutter all the way in. The cutter blade may damage the inside of the printer.

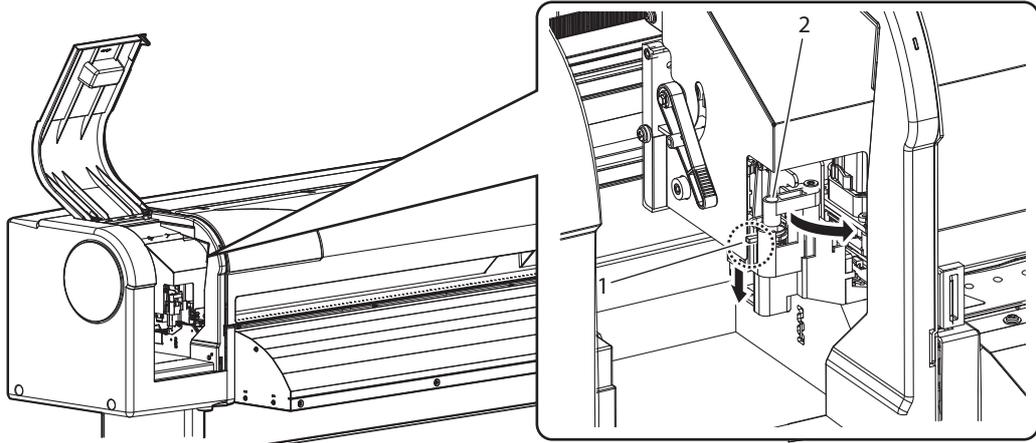

No.	Name
1	Cutter holder
2	Cutter holder lever


6. Remove the cutter.

**CAUTION**

- Do not touch the blade edge.  
It may cause an injury.
- Do not touch the cutter blade edge with a hard substance or drop the cutter.  
The cutter blade may be damaged or chipped.

**NOTE**

- Used cutter should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

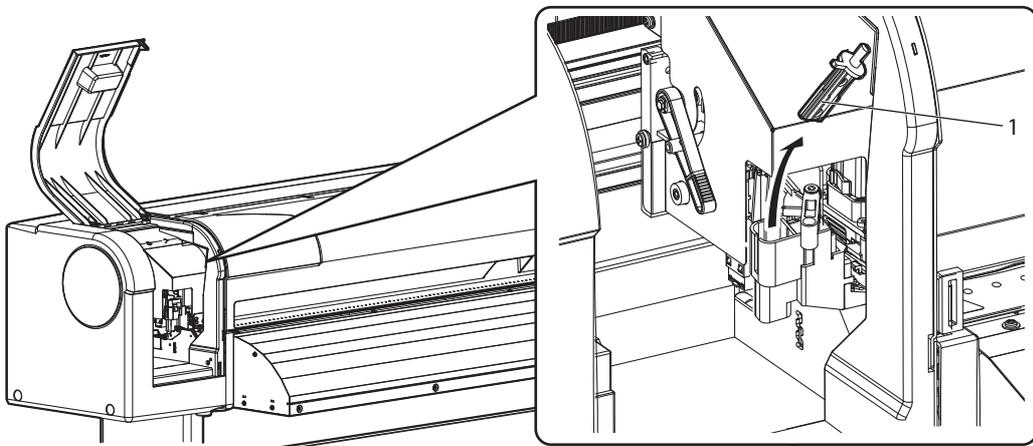


No.	Name
1	Razor blade

7. Install a new cutter as illustrated.

**NOTE**

- Make sure that the spring in the cutter holder does not fly out while installing.

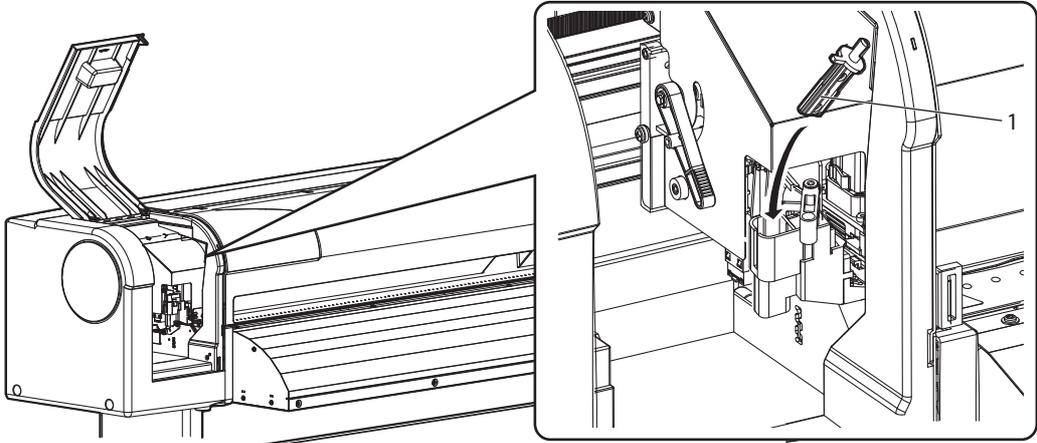


No.	Name
1	Razor blade

8. Press the tab of the cutter lightly, return the cutter holder to its initial position.


**NOTE**

- Do not press the tab of the cutter strongly or suddenly let go of it.  
There is a spring in the cutter holder and it may fly out.
- Do not push the cutter all the way in.  
The cutter blade may damage the inside of the printer.
- Refer to the illustrations below and install the cutter holder correctly.  
If it is not installed correctly, it may cause an error.  
If an error occurs, check if the cutter holder is installed correctly.

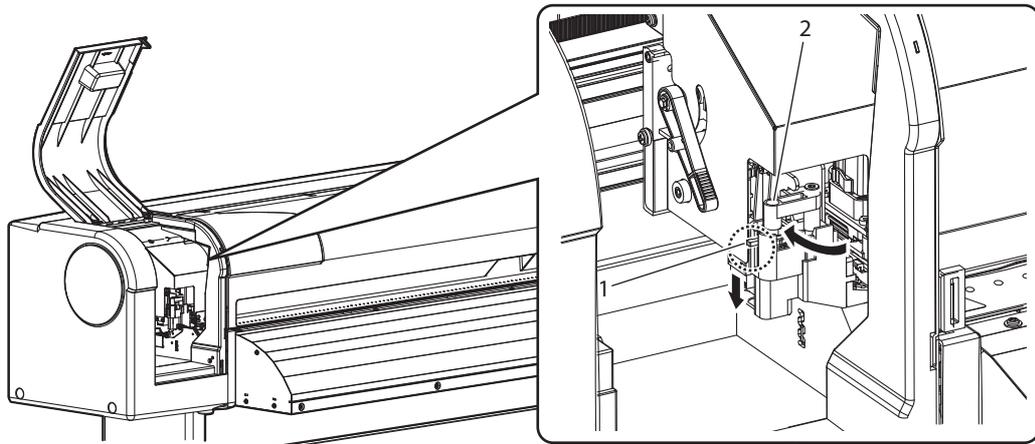


No.	Name
1	Cutter holder
2	Cutter holder lever

9. Close Maintenance cover L.

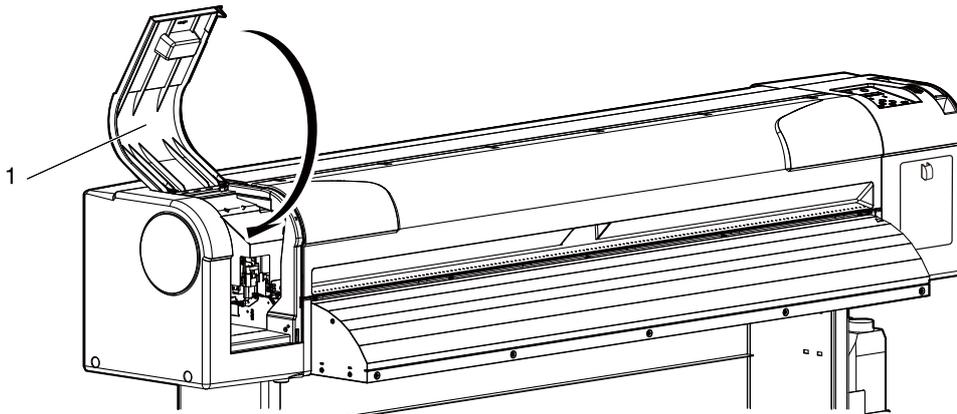


No.	Name
1	Maintenance cover L

10. Press the [Enter] key on the operation panel.

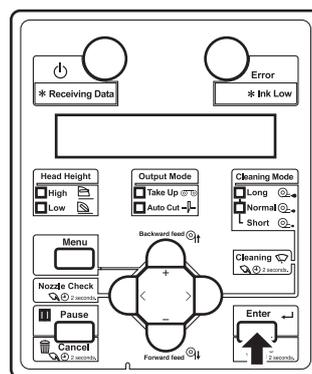

- The print head returns to its original position.
- “CR Maint.: Start” is displayed on the operation panel.

11. Press the [Menu] key on the operation panel.

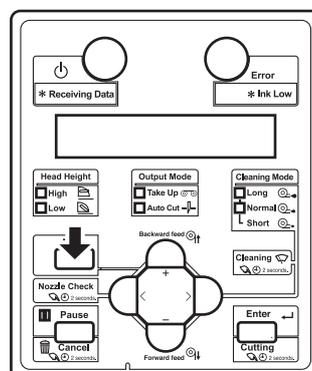

- The printer enters Normal.
- Cutter replacement is complete.

## 6.1.4 Replacing the cleaning wiper

This section explains how to replace the cleaning wiper.

### NOTE

Make sure to install the cleaning wiper in the printer.  
The cleaning wiper is an essential part to make printing consistent.

### (1) Replacement time

- Every twelve months

### (2) Type

### TIP

For types and details of the cleaning wiper, contact SIGNWarehouse Product Support or your PrismJET dealer.

### (3) Replacing steps


Follow the steps below to replace the cleaning wiper.

### CAUTION


- **Wear protective equipment (gloves, goggles or eye protection, protective mask, protective clothing) when handling ink.  
Be cautious that ink does not get into your eye or make a contact with your skin.**
- **When ink gets into your eye or make a contact with your skin, wash with water immediately.**
- **If left as it is, it may cause red eye or light inflammation. If it is necessary, please see your doctor immediately.**

1. Check the followings while the printer is turned ON.
  - Printing or other operations are not in progress.
  - Operation panel display is Normal.


2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

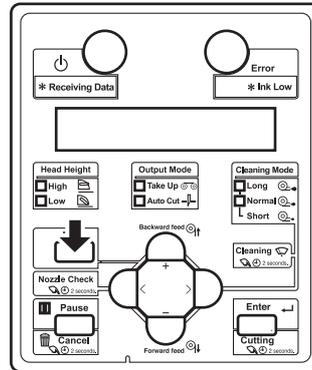


- “Menu 1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [>] key on the operation panel.

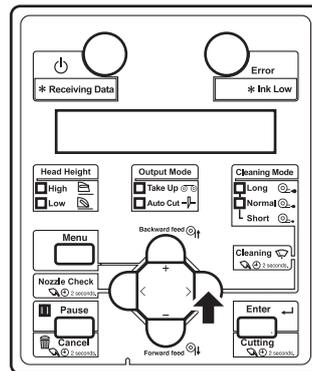

- “Set1: User Type” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

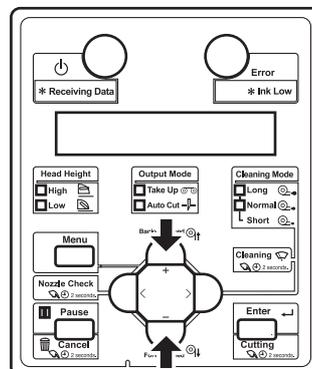


- d. Press the [Enter] key on the operation panel.

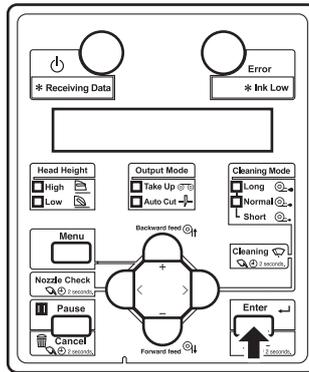

- “CR Maint.: Start” is displayed on the operation panel.
- The display enters the CR Maintenance menu.


#### 5.1.17 CR Maintenance menu

3. Press the [Enter] key on the operation panel.

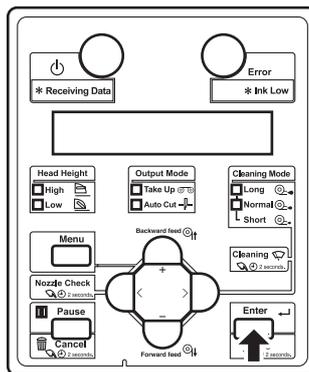

- Maintenance starts.
- The print head moves to the left of the printer (cutter replacement position).
- “CR Maintenance: End” is displayed on the operation panel.


4. Open the front cover.

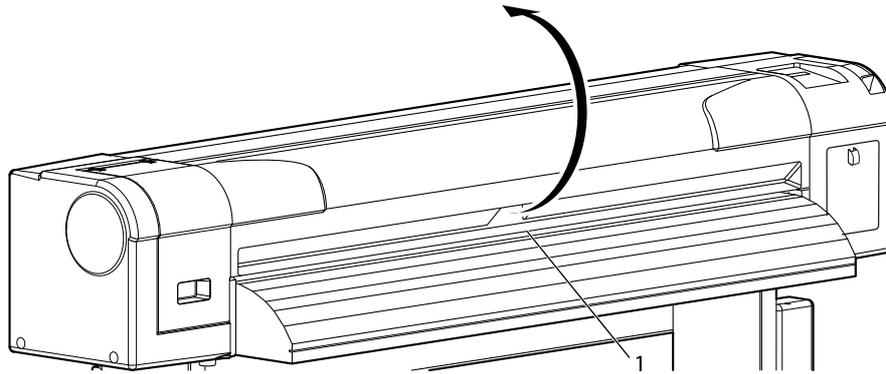

No.	Name
1	Front cover

5. Remove the maintenance cover R.


- Turn the knob to left until it clicks.
- Open the maintenance cover R while sliding the knob down.
- Remove the maintenance cover R.

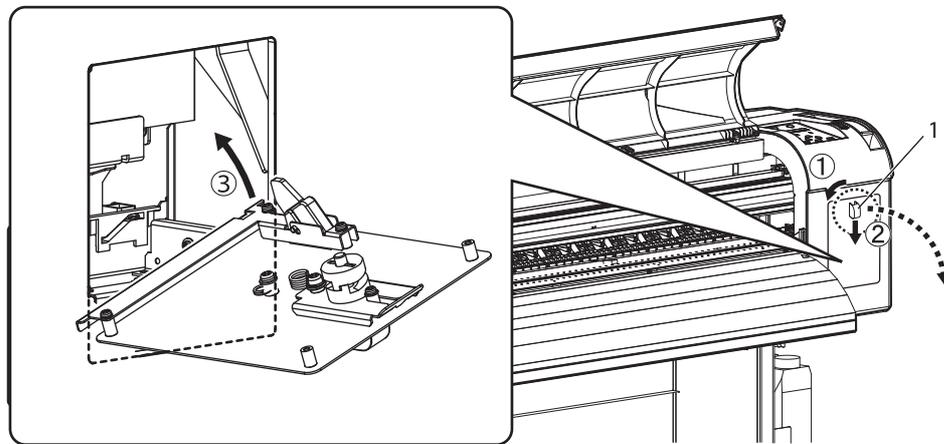

No.	Name
1	Maintenance cover R

## 6. Remove the cleaning wiper.


- Slide the hook on the wiper to the front side to unhook from the wiper slot.
- Lift the hook and remove the cleaning wiper.

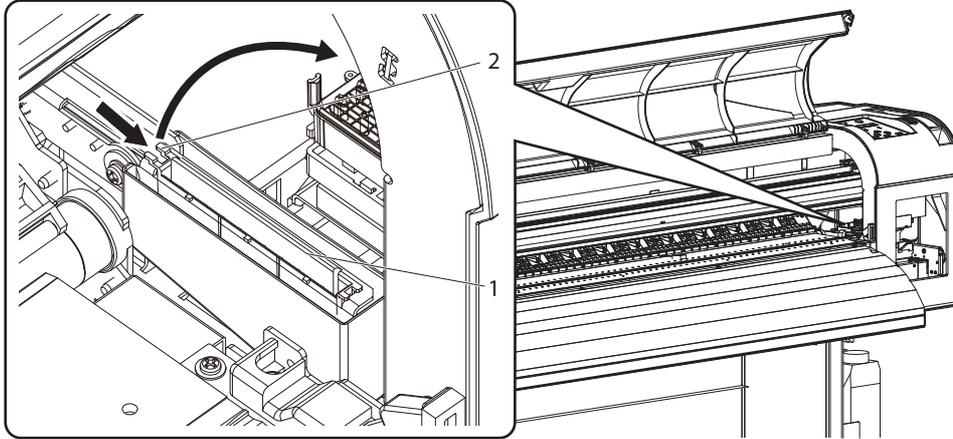

No.	Name
1	Cleaning wiper
2	Cleaning wiper hook

## 7. Follow the steps below to install new cleaning wiper.


- Slide the front side of the new cleaning wiper into its slot.
- Press the wiper hook down until it clicks into place.

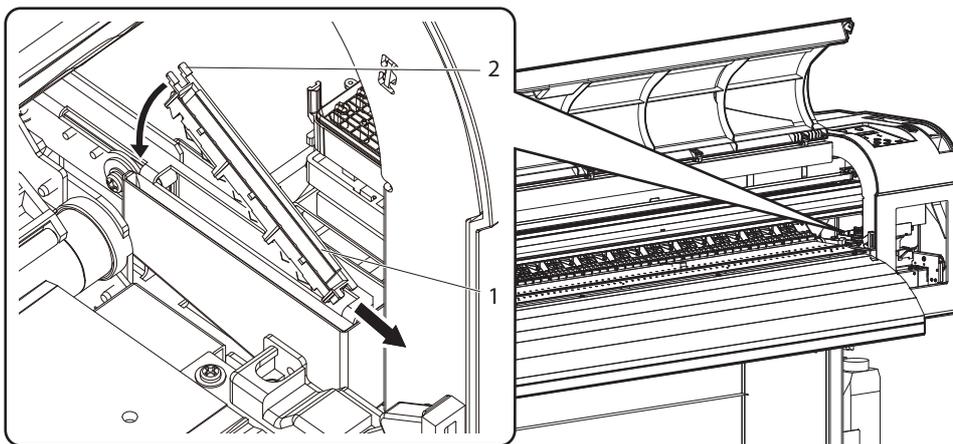

No.	Name
1	Cleaning wiper
2	Cleaning wiper hook


8. Close the maintenance cover R.

- Attach the bottom of the maintenance cover R to the printer.
- While turning the knob to left and sliding it down, close the upper side of the cover.
- Turn the knob back to the original position to lock the upper side of the cover.

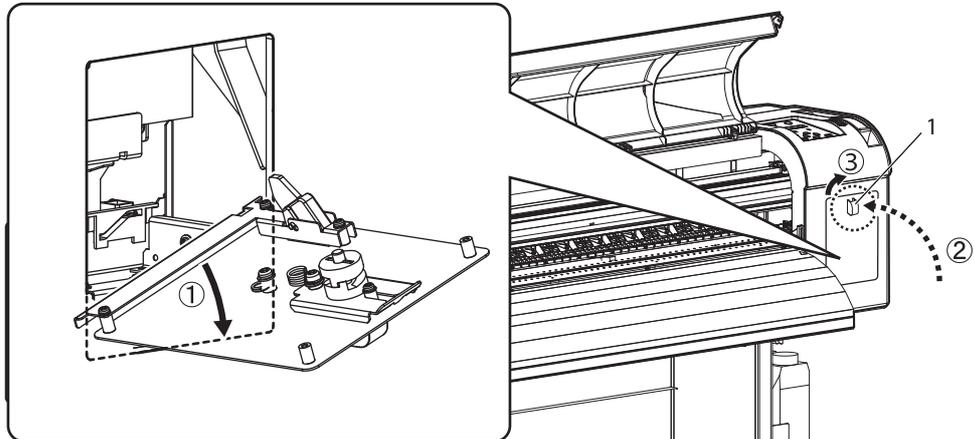


No.	Name
1	Maintenance cover R

9. Close the front cover.

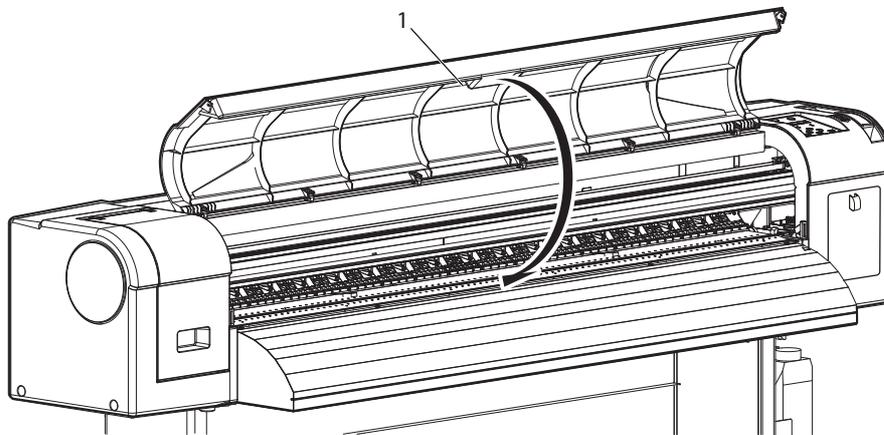


No.	Name
1	Front cover

10. Press the [Enter] key on the operation panel.

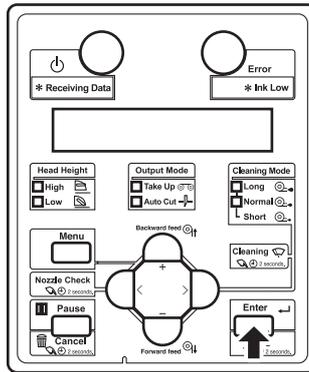

- The print head returns to its original position.
- “CR Maint.: Start” is displayed on the operation panel.

11. Press the [Menu] key on the operation panel.

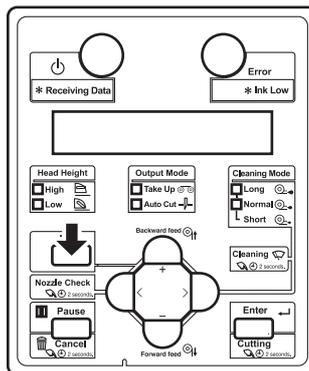

- The printer enters Normal.
- This completes the replacement procedure of the cleaning wiper.

## 6.2 Cleaning the printer

Periodic (every month) cleaning is necessary to use the printer in good condition.

### WARNING

- **Do not insert or drop metal or flammable objects into the printer through openings such as a vent.**  
It could lead to an electric shock or fire.
- **If foreign substances or liquids such as water entered the printer, do not use the printer as it is.**  
It could lead to an electric shock or fire.  
Immediately turn OFF the power switch, disconnect the power plug from the electric socket, and contact SIGNWarehouse Product Support or your PrismJET dealer.

### CAUTION


- **When cleaning the areas other than the wiper, make sure to turn OFF the power and unplug the power cable.**
- **Do not use volatile solvents such as thinner, benzene, or alcohol.**  
These solvents could cause damage to the paint.
- **Be careful that no moisture enters the printer.**  
There is a possibility that the electric circuit inside the printer is short circuited.
- **Do not open covers attached using screws under any circumstances.**  
This may cause an electric shock or a malfunction.

This section describes how to clean each part of the printer.

## 6.2.1 Cleaning the outer case

This section describes how to clean the outer case.

Wipe out dust and dirt attached to the outer case by using a soft cloth.

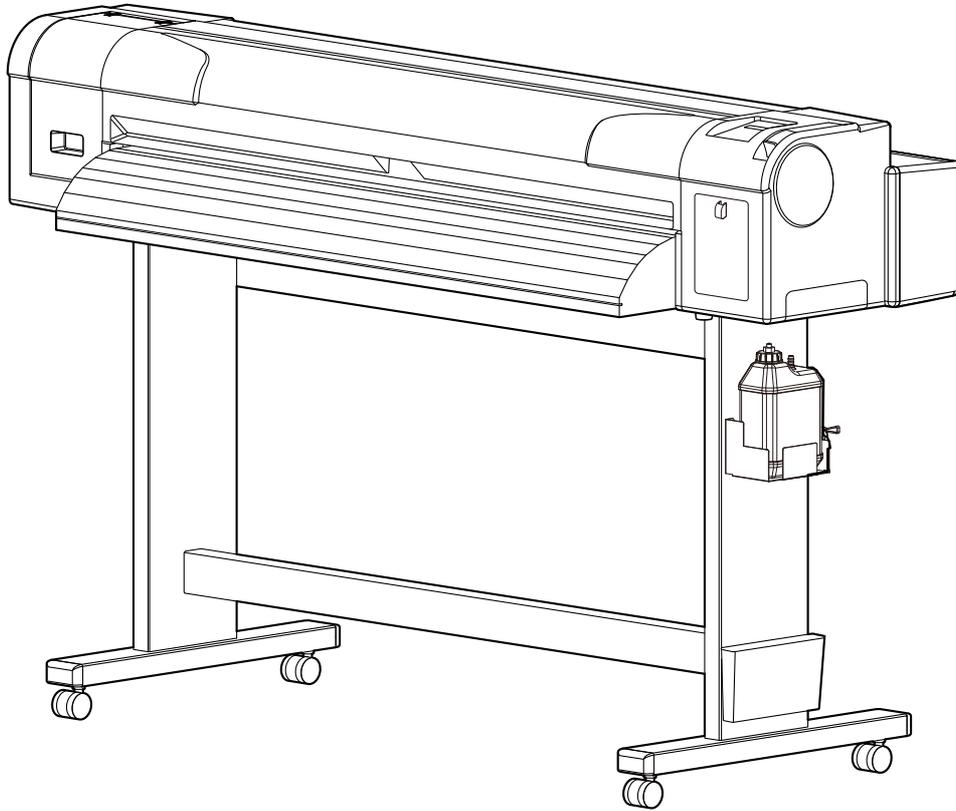


## 6.2.2 Cleaning the inside of the printer

This section describes how to clean the inside of the printer.

Follow the procedure below.

1. Open the front cover.

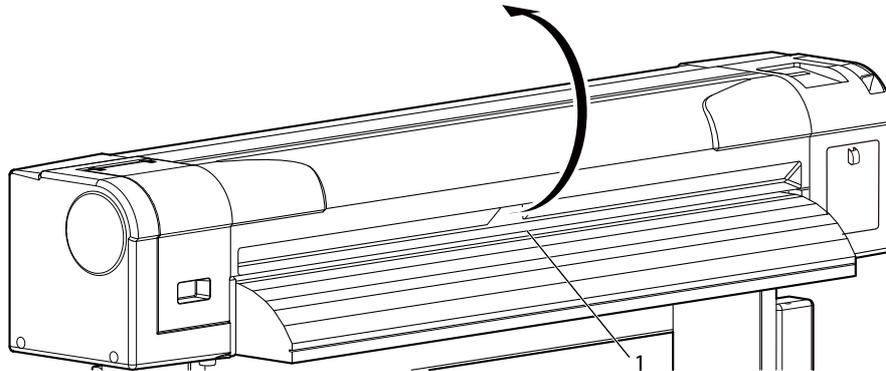


No.	Name
1	Front cover

2. Remove paper powder and dust attached to the pressurizing rollers using a soft brush.


### NOTE

- Do not blow paper powder inside the printer using tools such as an air duster. It may cause an abnormal noise from the inside of the printer.

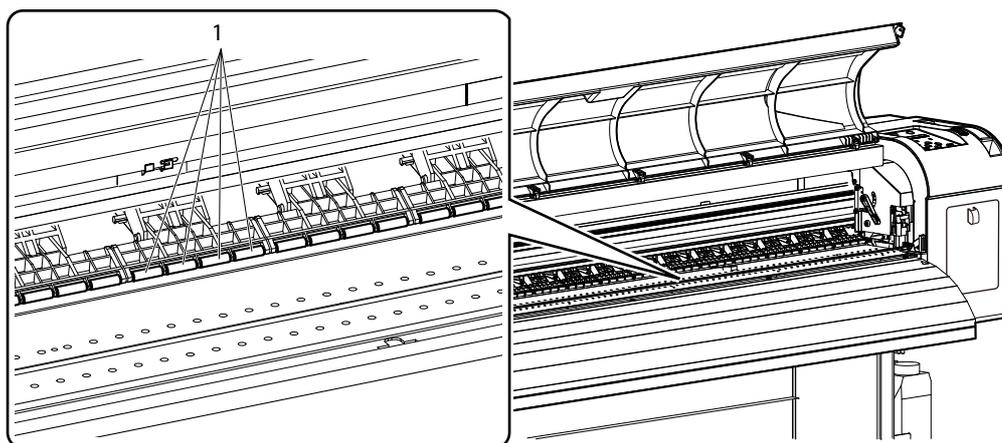


No.	Name
1	Pressurizing rollers

3. Apply a damp and tightly squeezed soft cloth to wipe out paper powder and ink attached to the platen and media guide.

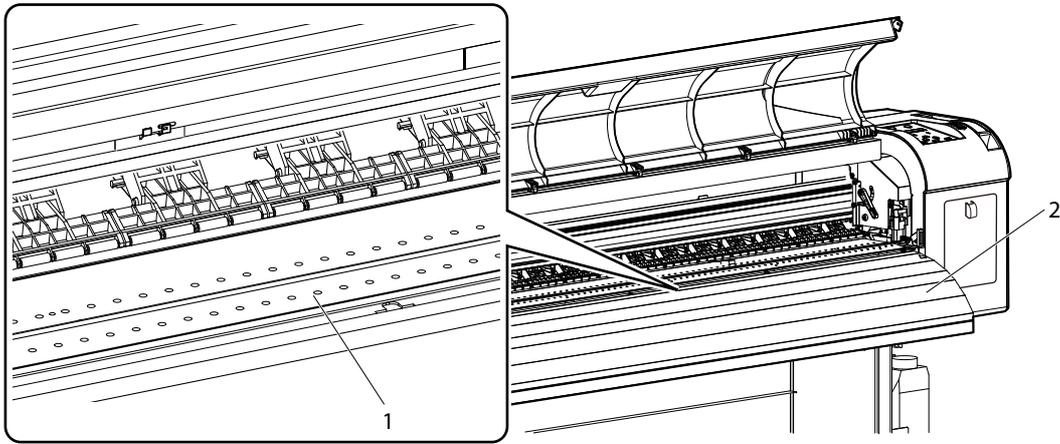

No.	Name
1	Platen
2	Media guide

4. Apply a damp and tightly squeezed soft cloth to wipe off the dirt of the unpainted (silver color) area in the center of the grid roller.

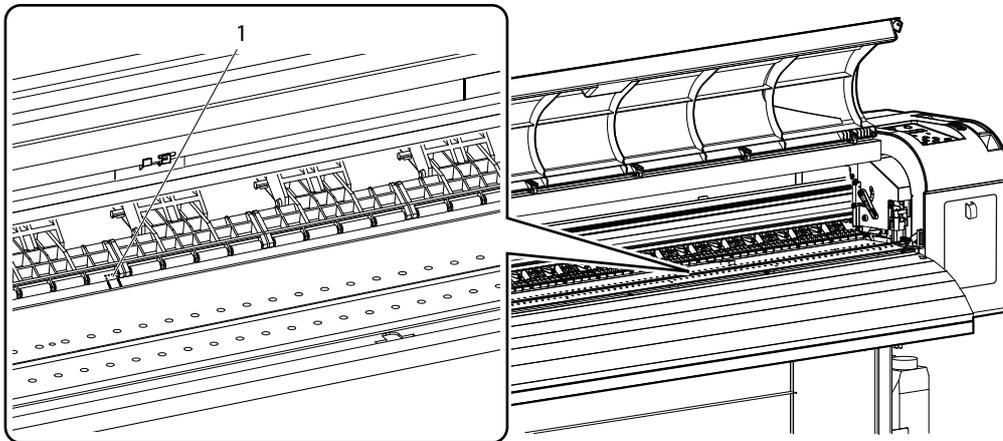

No.	Name
1	Grid roller

## 6.2.3 Head cleaning

If printed data is blurred or lacks part of it, clean the print head surface and nozzle (Head cleaning).

Follow the procedure below to perform Head cleaning.


### NOTE

- When not using the printer for a long period (one week or more), perform Head cleaning once a week.  
If not performing Head cleaning, the print head is clogged. Doing so will preserve print quality. When you may not be able to run a weekly cleaning on the printer that is in sleep mode: Perform "Longstore" and then power off the printer.


 [6.5.1 Long-term storage](#)

- Failure to clean and maintain your printer may void the warranty.

1. Confirm that the operation panel is Normal.
2. Make sure that the media loading lever is lowered.
3. Press the [>] key on the operation panel to select the cleaning mode.

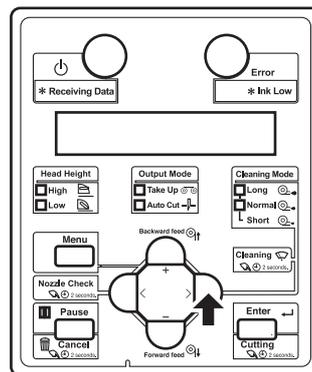

4. Press the [Cleaning] key on the operation panel for at least two seconds.

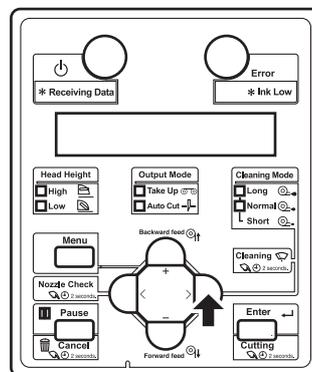

- Start Head cleaning.
- “Cleaning \*\*%” is displayed on the operation panel.
- After Head cleaning is complete, the operation panel shifts to Normal.

**NOTE**

- If you fail to remove blurs or incompleteness of printing in one Head cleaning, perform strong cleaning.
  - If blurs or lacking parts in printed media do not disappear with several times of Head cleaning, refer to “[7 Troubleshooting](#)”, and take appropriate measures.
- 

## 6.2.4 Cleaning the cleaning wiper

This section describes how to clean the cleaning wiper.

### (1) Time for cleaning

Once a week, or when blurs or lacking parts appear on printed media after Head cleaning.

### (2) Cleaning procedures


Follow the procedure below to clean the cleaning wiper.

**NOTE**


- Use the cleaning stick to clean the cleaning wiper.  
For details of the cleaning stick, refer to “[8.3 Options/Supply list](#)”.
- 

1. If the printer is turned ON, make sure the following.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.


2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

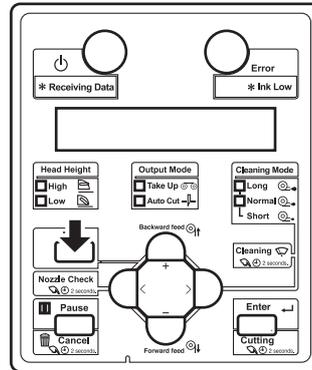


- “Menu1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [>] key on the operation panel.

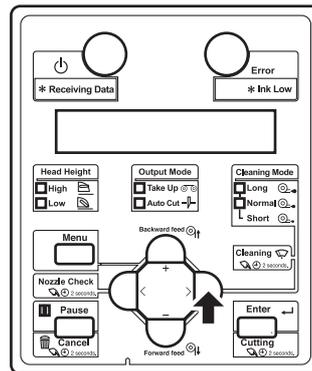

- “Set1: User Type” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

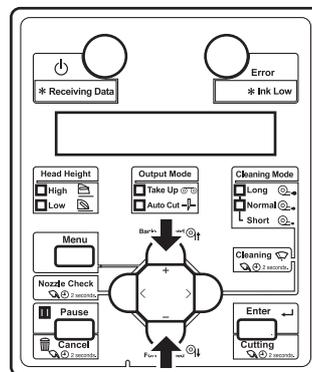


- d. Press the [Enter] key on the operation panel.

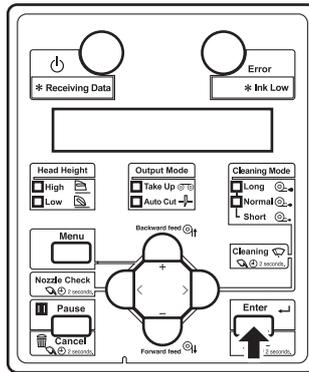

- “CR Maint.: Start” is displayed on the operation panel.
- The display enters the CR Maintenance menu.


 **5.1.17 CR Maintenance menu**

3. Press the [Enter] key on the operation panel.

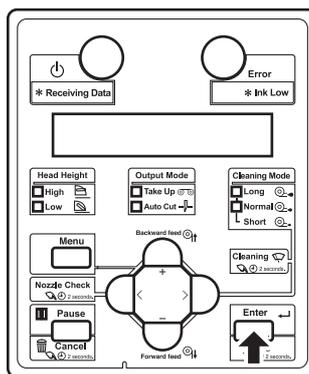

- Maintenance starts.
- The print head moves to the left.
- “CR Maint.: End” is displayed on the operation panel.

4. Open the front cover.

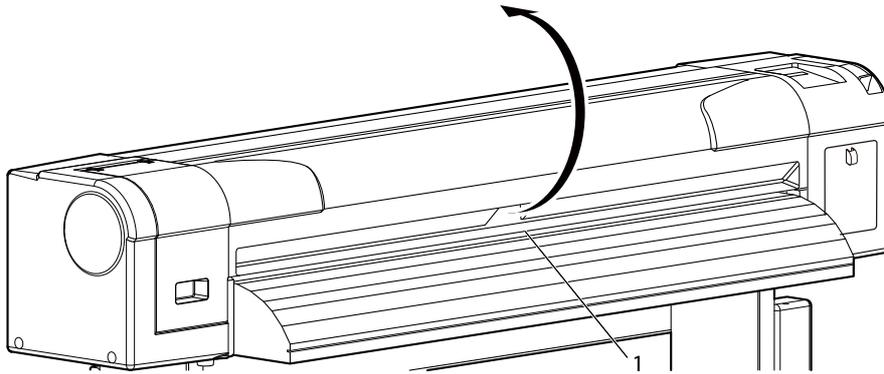


No.	Name
1	Front cover

**CAUTION**

- **When cleaning the cleaning wiper,**
  - **do not touch the cleaning wiper and head cap unit.**  
Head cleaning may not be performed correctly because of oil from your hands.
  - **Make sure to wipe the print head using the cleaning stick.**  
A wet cleaning stick may cause the print head to clog.
  - **Do not reuse the cleaning stick.**  
The attached dust, etc may damage the print head.


5. Use the cleaning stick to remove the ink and dust on the cleaning wiper.

- a. Front side of the cleaning wiper:  
Remove the ink and dust in the horizontal direction.

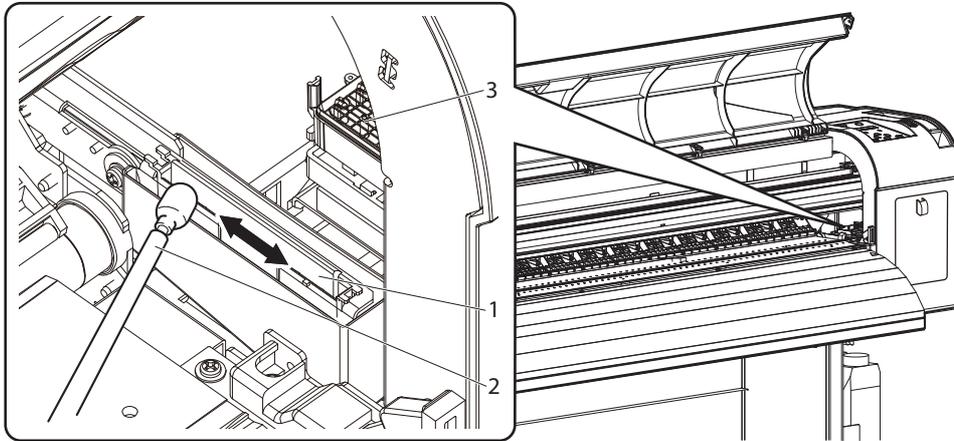


No.	Name
1	Cleaning wiper
2	Cleaning stick
3	Head cap unit

- b. Cleaning wiper back side:  
Remove the ink and dust in the upper direction.

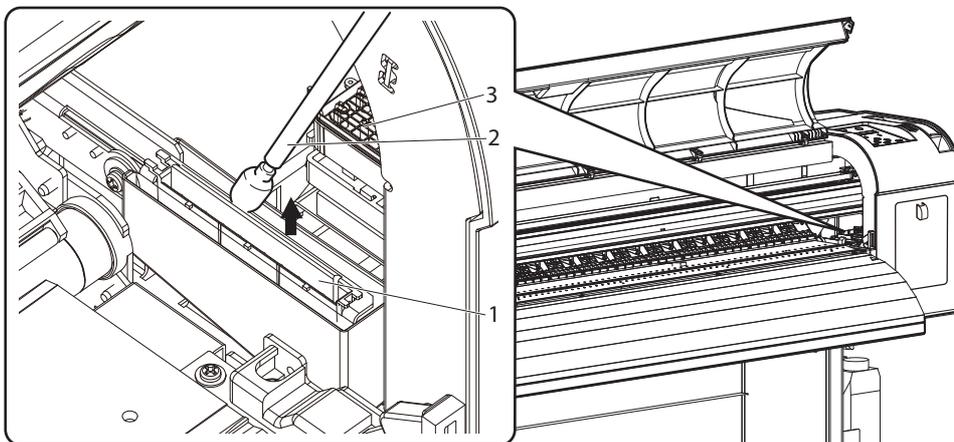


No.	Name
1	Cleaning wiper
2	Cleaning stick
3	Head cap unit

6. Close the front cover.

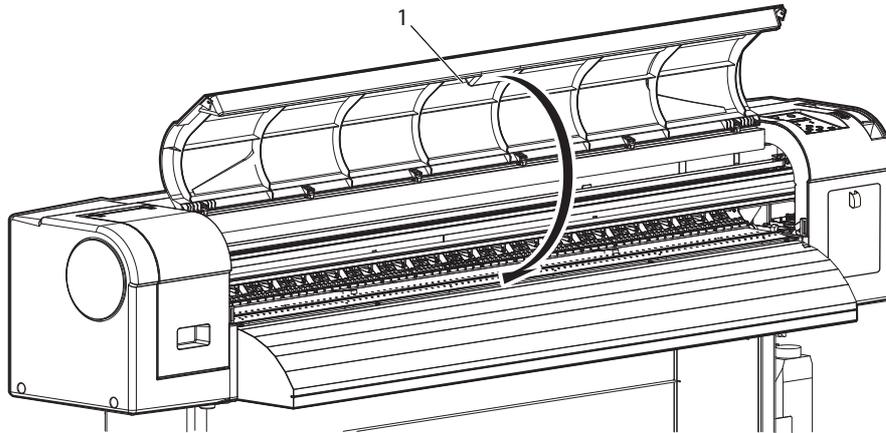


No.	Name
1	Front cover

7. Press the [Enter] key on the operation panel.

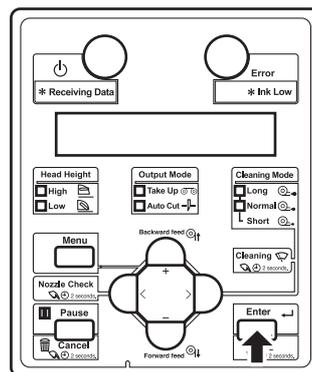

- The print head returns to its original position.
- “CR Maint.: Start” is displayed on the operation panel.

8. Press the [Menu] key on the operation panel.

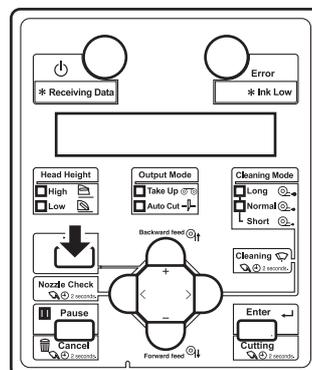

- The printer enters Normal.
- Cleaning the cleaning wiper is complete.

## 6.2.5 Cleaning around the capping unit

This section describes how to clean around the capping unit.

### (1) Time for cleaning

Weekly

### (2) Cleaning procedures


Follow the procedure below to clean around the capping unit.

#### NOTE


- Before cleaning around the capping unit, read this procedure thoroughly to fully understand it, and clean promptly and correctly.
- While cleaning around the capping unit, with the cap removed from the print head, therefore cleaning must be done before the print head dries.  
This operation should be done within 15 minutes.  
If the operation lasts over 15 minutes, follow the Steps 7 to 9 to stop the operation and perform head cleaning, then resume cleaning.  
 [6.2.3 Head cleaning](#)
- Use the cleaning stick to clean around the capping unit.  
For details of the cleaning stick, refer to “[8.3 Options/Supply list](#)”.
- Failure to clean and maintain your printer may void the warranty.

1. If the printer is turned ON, make sure the following.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.


2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

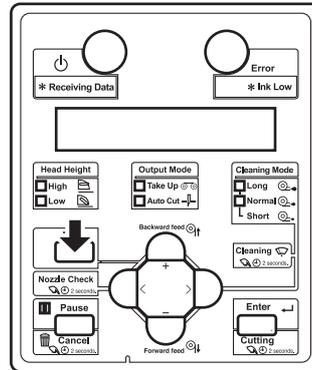


- “Menu1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [>] key on the operation panel.

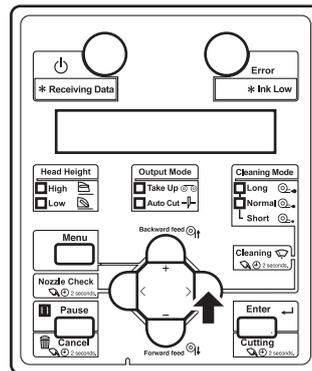

- “Set1: UserType” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

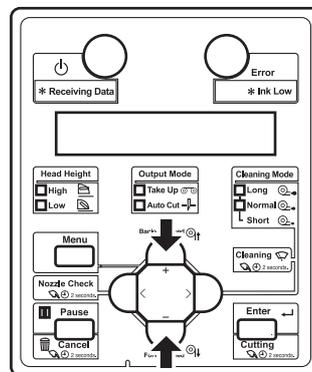


- d. Press the [Enter] key on the operation panel.

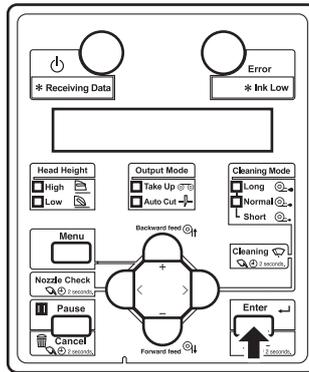

- “CR Maine.: Start” is displayed on the operation panel.
- The display enters the CR Maintenance menu.


 **5.1.17 CR Maintenance menu**

3. Press the [Enter] key on the operation panel.

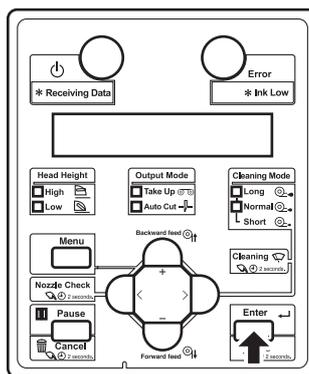

- Maintenance starts.
- The print head moves to the left.
- “CR Maintenance: End” is displayed on the operation panel.


4. Open the front cover.

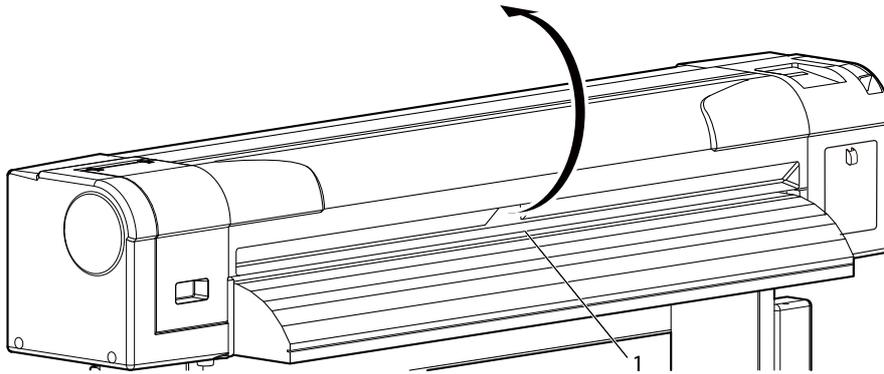

No.	Name
1	Front cover

5. Remove the maintenance cover R.

- Turn the knob to left until it clicks.
- Open the maintenance cover R while sliding the knob down.
- Remove the maintenance cover R.

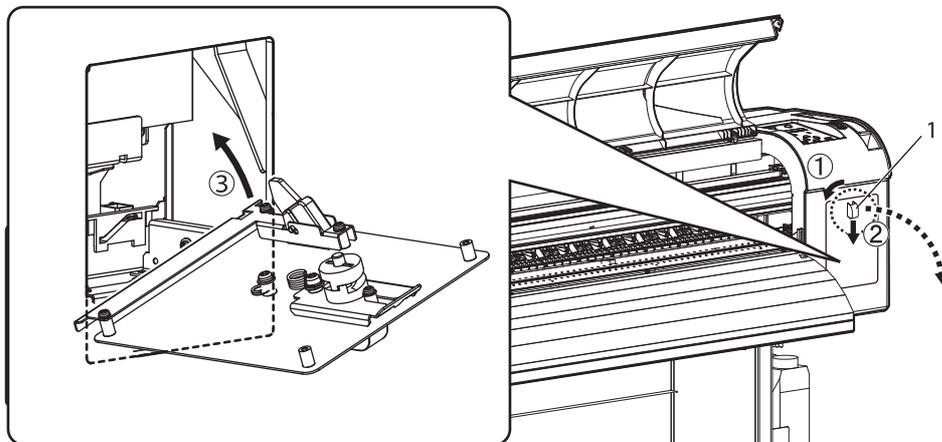


No.	Name
1	Maintenance cover R

6. Use the cleaning stick to clean around the rubber part of the capping unit to remove the ink deposits and dust.

**CAUTION**


- **When cleaning around the capping unit,**
  - **Use a dry cleaning stick. A damp stick can cause damage to the print head.**
  - **Do not touch the tip of a cleaning stick with fingers. Skin oil will damage the print head.**
  - **Do not reuse a cleaning stick. Dust on the stick will damage the print head.**

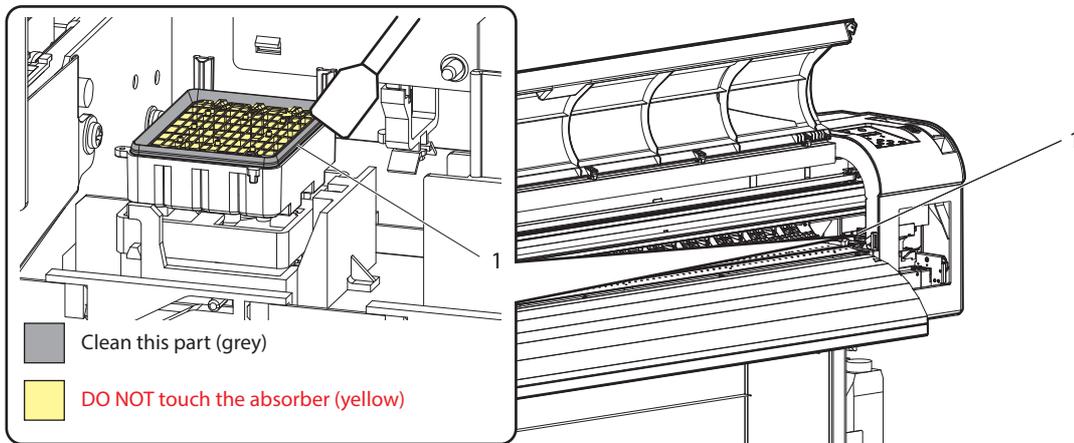

No.	Name
1	Around the capping unit


7. Close the maintenance cover R.

- Attach the bottom of the maintenance cover R to the printer.
- While turning the knob to left and sliding it down, close the upper side of the cover.
- Turn the knob back to the original position to lock the upper side of the cover.

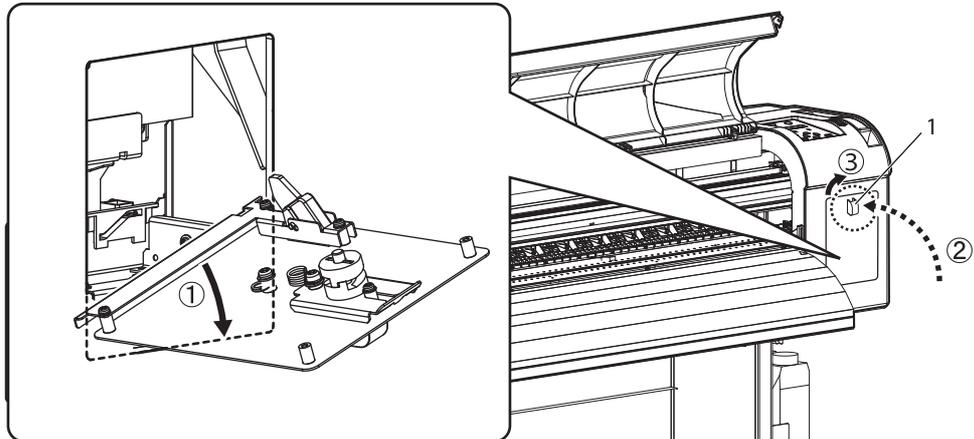


No.	Name
1	Maintenance cover R

8. Close the front cover.

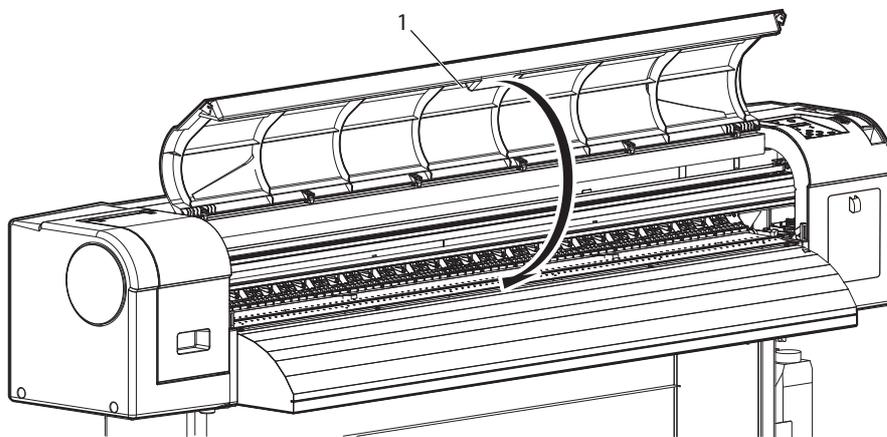


No.	Name
1	Front cover

9. Press the [Enter] key on the operation panel.

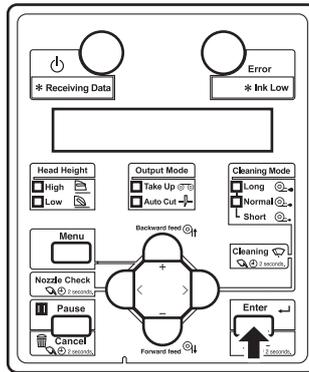

- The print head returns to its original position.
- “CR Maine.: Start” is displayed on the operation panel.

10. Press the [Menu] key on the operation panel.

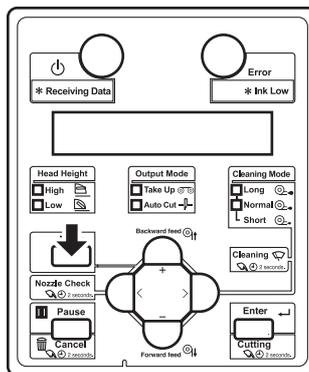

- The printer enters Normal.
- Cleaning around the print head is complete.

## 6.2.6 Cleaning around the print head

This section describes how to clean around the print head.

### (1) Time for cleaning

When foreign substances such as dust or ink clump that can cause missing dots or ink leakage is attached around the print head.

### (2) Cleaning procedures


Follow the procedure below to clean around the print head.

#### NOTE


- Before cleaning around the print head, read this procedure thoroughly to fully understand it, and clean promptly and correctly.
- While cleaning around the capping unit, with the cap removed from the print head, therefore cleaning must be done before the print head dries.  
This operation should be done within 15 minutes.  
If the operation lasts over 15 minutes, follow the Steps 8 and 9 to stop the operation and perform head cleaning, then resume cleaning.  
🔗 [6.2.3 Head cleaning](#)
- Use the cleaning stick to clean around the print head.  
For details of the cleaning stick, refer to “[8.3 Options/Supply list](#)”.
- Failure to clean and maintain your printer may void the warranty.

1. If the printer is turned ON, make sure the following.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.


2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

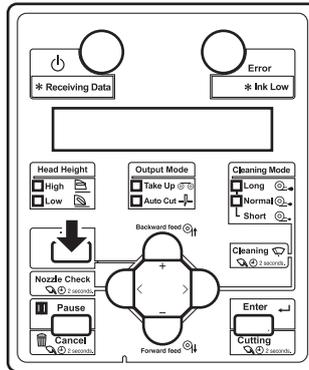


- “Menu1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [>] key on the operation panel.

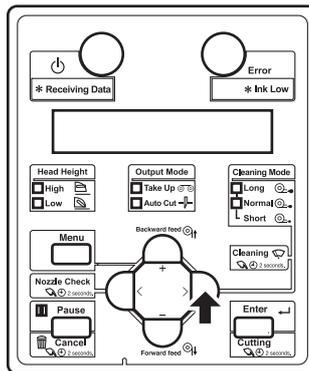

- “Set1: UserType” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

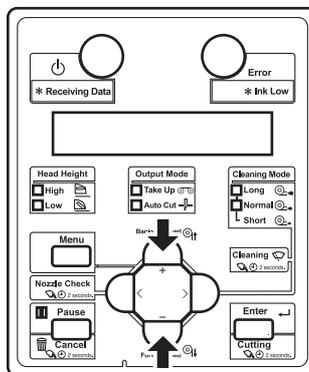


- d. Press the [Enter] key on the operation panel.

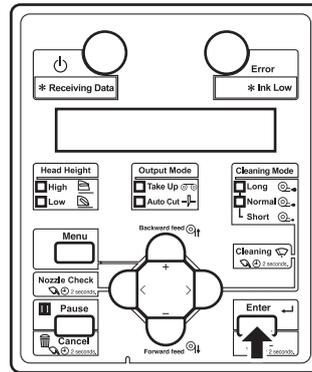

- “CR Maine.: Start” is displayed on the operation panel.
- The display enters the CR Maintenance menu.


 **5.1.17 CR Maintenance menu**

3. Press the [Enter] key on the operation panel.

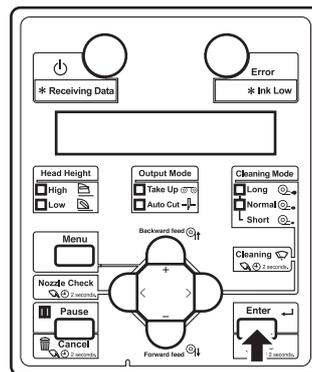

- Maintenance starts.
- The print head moves to the left.
- “CR Maintenance: End” is displayed on the operation panel.

4. Open the maintenance cover L.

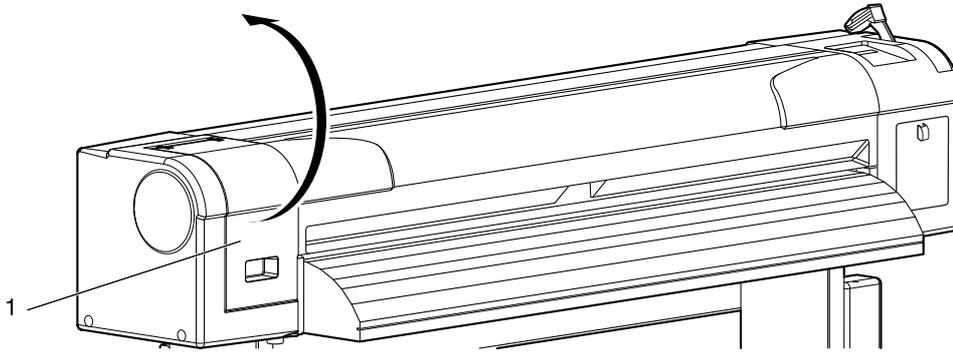


No.	Name
1	Maintenance cover L

5. Move the print head section by hand to where the circumference of the Print head is visible.


**CAUTION**

- Do not press the Print head section strongly. Doing so may cause damage or poor print results.

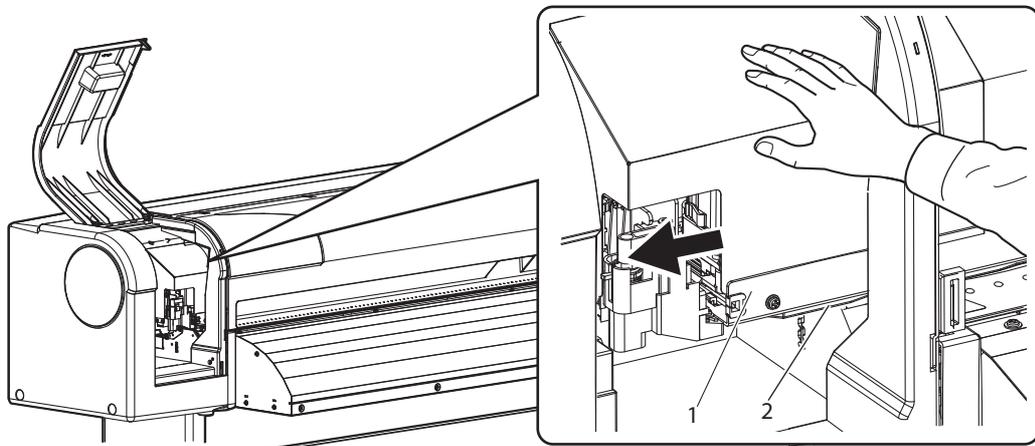

No.	Name
1	Print head section
2	Circumference of the Print head

6. Use a penlight, etc to check if any foreign substance, such as dust or ink clump, is attached to the following places.

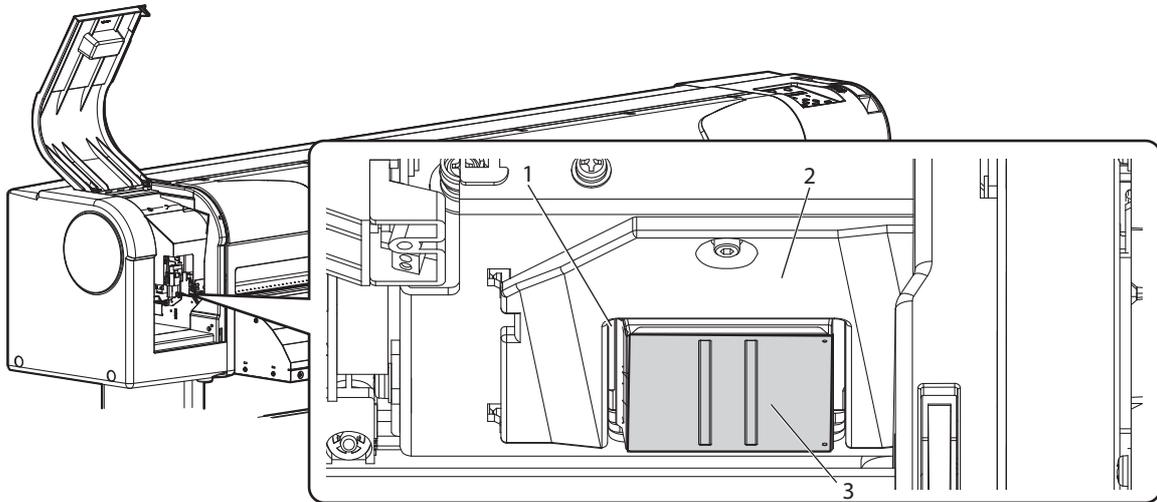


No.	Name
1	Around the print head
2	Head guide
3	Nozzles

7. When some foreign substance such as dust or ink clump is attached, use the cleaning stick to remove it.


**CAUTION**

- **When cleaning around the print head,**
  - **do not touch the nozzles of the print head.**  
Doing so may damage the print head.
  - **Do not touch the tip of the cleaning stick.**  
The print head may be damaged because of oil from your hands.
  - **Never put water, etc on the tip of the cleaning stick.**  
Doing so may damage the print head.
  - **Do not reuse the cleaning stick.**  
The attached dust, etc may damage the print head.

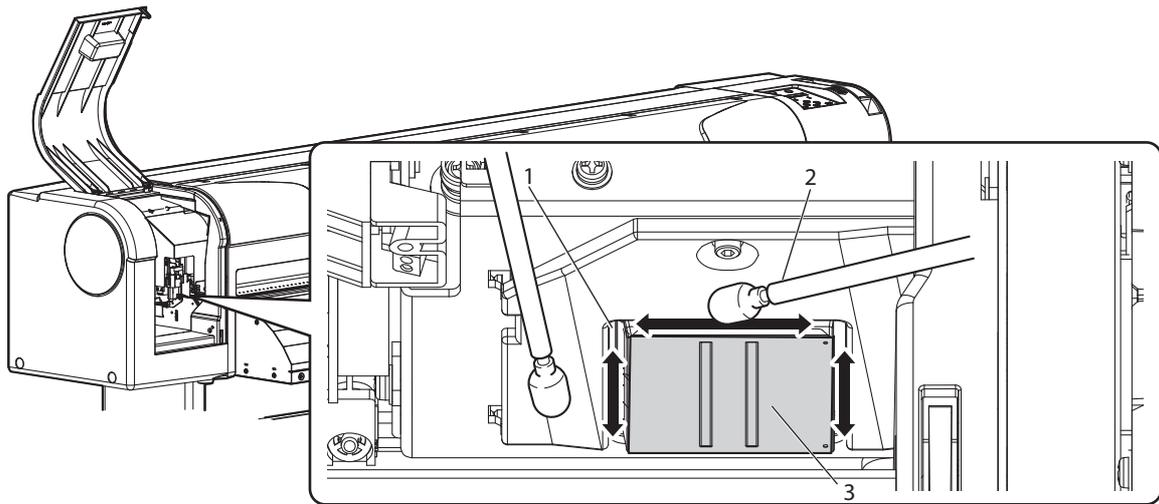


No.	Name
1	Around the print head
2	Head guide
3	Nozzles

8. Close the maintenance cover L.
- Close the cover firmly until it is locked.

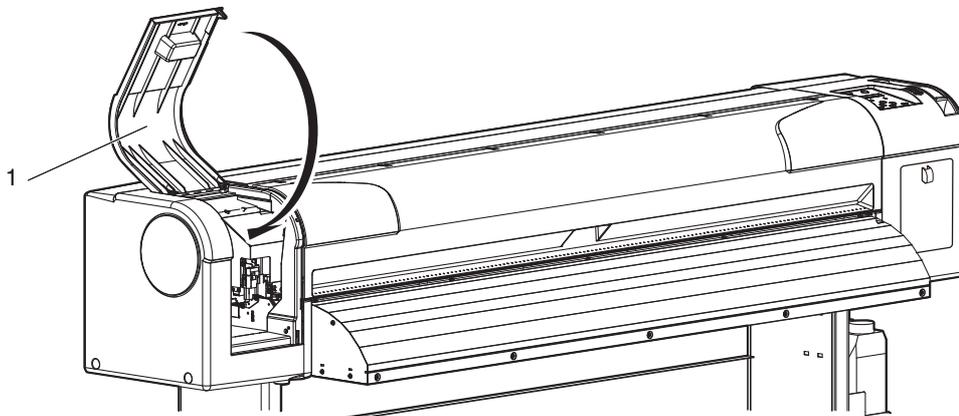


No.	Name
1	Maintenance cover L

9. Press the [Enter] key on the operation panel.

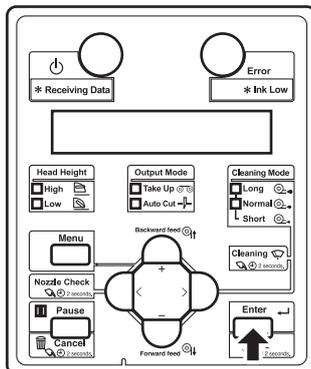

- The print head returns to its original position.
- “CR Maine.: Start” is displayed on the operation panel.

10. Press the [Menu] key on the operation panel.

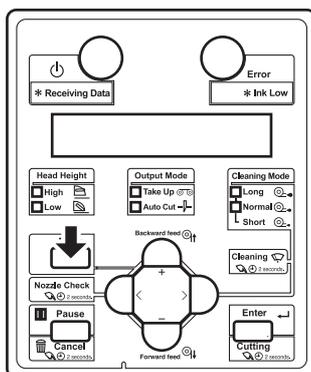

- The printer enters Normal.
- Cleaning around the print head is complete.

## 6.2.7 Cleaning the color sensor

This section describes how to clean the color sensor.

### (1) Time for cleaning

If you repeatedly failed to perform an auto print quality calibration (Adjust Print).

### (2) Cleaning procedures


Follow the procedure below to clean the color sensor.

#### NOTE


- Before cleaning the color sensor, read this procedure thoroughly to fully understand it, and clean promptly and correctly.
- While cleaning around the capping unit, with the cap removed from the print head, therefore cleaning must be done before the print head dries.  
This operation should be done within 15 minutes.  
If the operation lasts over 15 minutes, follow the Steps 8 and 9 to stop the operation and perform head cleaning, then resume cleaning.  
🔗 [6.2.3 Head cleaning](#)
- Use the cleaning stick to clean the color sensor.  
For details of the cleaning stick, refer to “[8.3 Options/Supply list](#)”.
- Failure to clean and maintain your printer may void the warranty.

- 
1. If the printer is turned ON, make sure the following.
    - Printing or other operations are not in progress.
    - The operation panel display is Normal.


2. Display the CR Maintenance menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

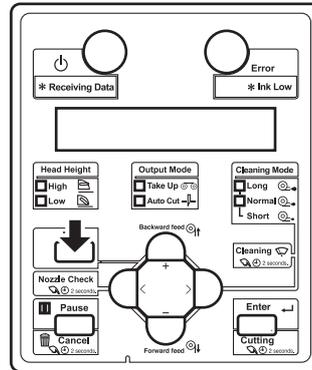


- “Menu1: Setup>” is displayed on the operation panel.
  - The operation panel shifts to the Setup menu display.
- b. Press the [>] key on the operation panel.

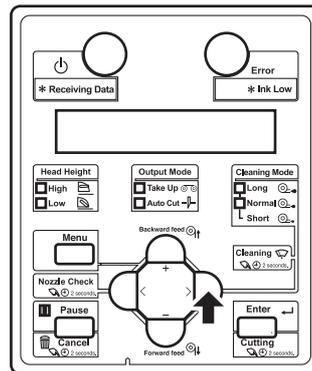

- “Set1: UserType” is displayed on the operation panel.
- c. Press the [+] key or [-] key to select “Set17: CR Maintenance”.

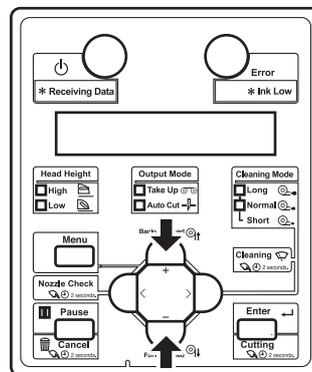


- d. Press the [Enter] key on the operation panel.

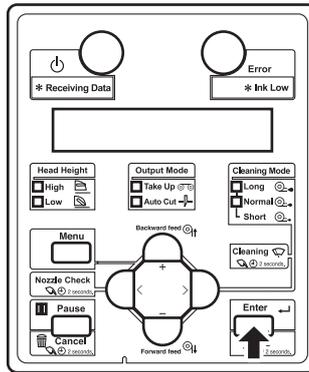

- “CR Maine.: Start” is displayed on the operation panel.
- The display enters the CR Maintenance menu.


#### 5.1.17 CR Maintenance menu

3. Press the [Enter] key on the operation panel.

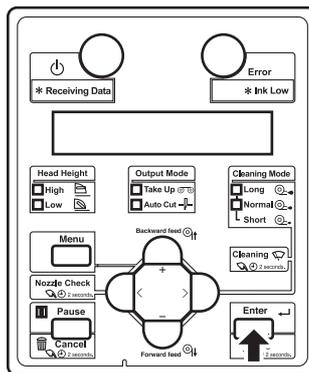

- Maintenance starts.
- The print head moves to the left.
- “CR Maintenance: End” is displayed on the operation panel.

4. Open the maintenance cover L.

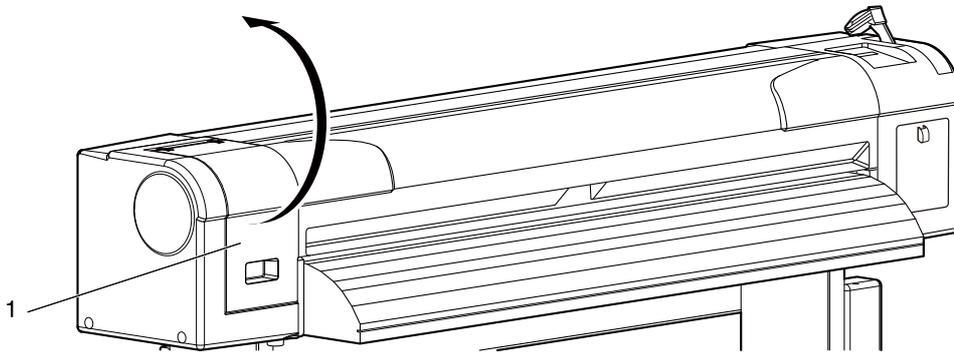


No.	Name
1	Maintenance cover L

5. Move the print head section by hand to where the circumference of the color sensor is visible.




**CAUTION**

- Do not press the Print head section strongly. Doing so may cause damage or poor print results.

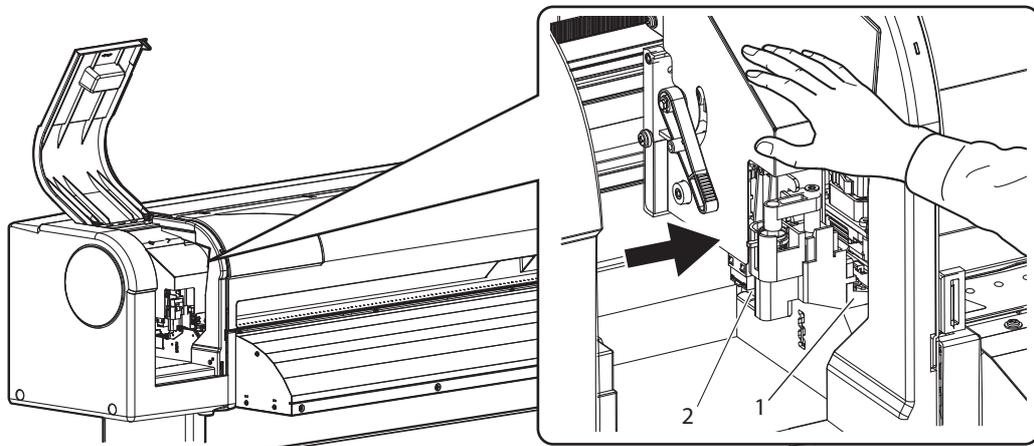

No.	Name
1	Print head section
2	Color sensor

6. Use a penlight, etc to check if any foreign substance, such as dust or ink clump, is attached to the following places.

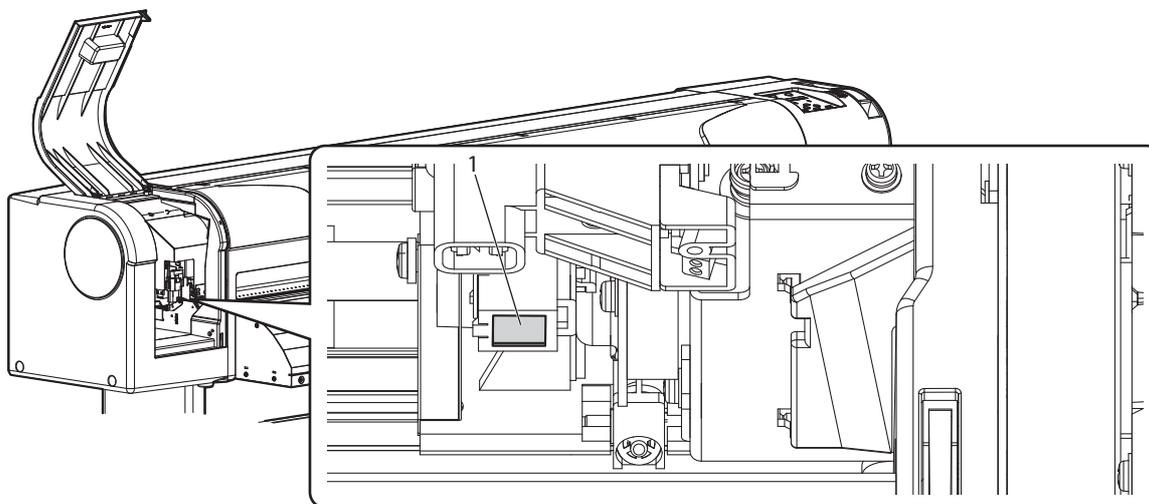


No.	Name
1	Color sensor

7. Using a cleaning stick slightly dampened with ethanol, gently clean the glass on the color sensor located at the bottom of the carriage to remove ink and dust.


**CAUTION**

- **When cleaning the color sensor,**
  - **Do not touch the nozzles of the print head.**  
Doing so may damage the print head.
  - **Do not touch the tip of the cleaning stick.**  
The print head may be damaged because of oil from your hands.
  - **Never put water, etc on the tip of the cleaning stick.**  
Doing so may damage the print head.
  - **Do not reuse the cleaning stick.**  
The attached dust, etc may damage the print head.
  - **Do not push the glass on the color sensor too hard with a cleaning stick.**  
This will damage the glass.

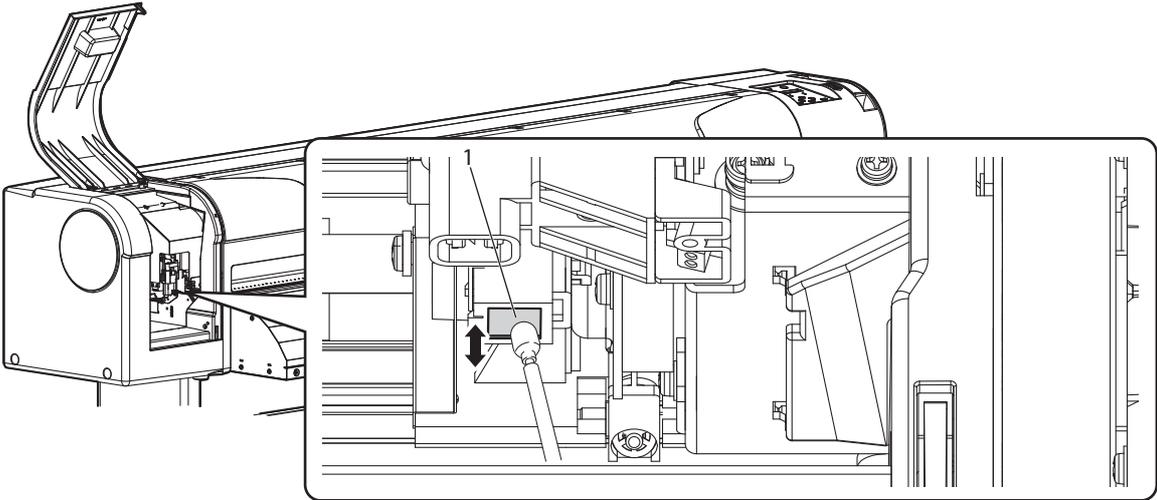


No.	Name
1	Color sensor

- 8. Close the maintenance cover L.
  - Close the cover firmly until it is locked.

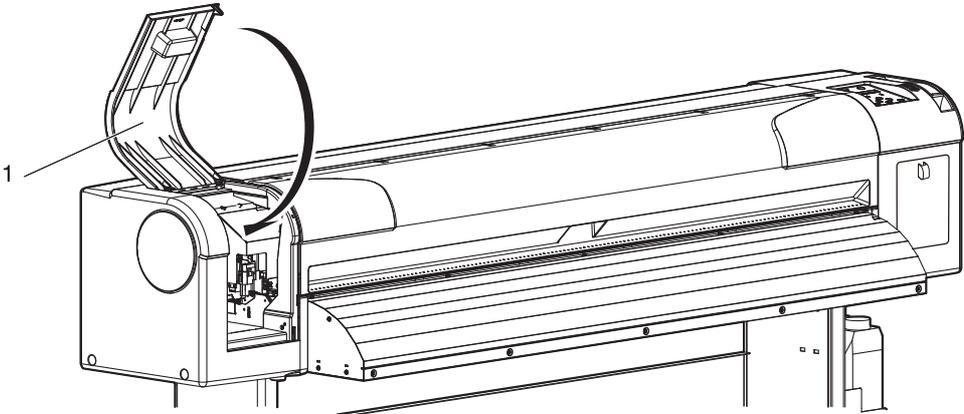


No.	Name
1	Maintenance cover L

9. Press the [Enter] key on the operation panel.

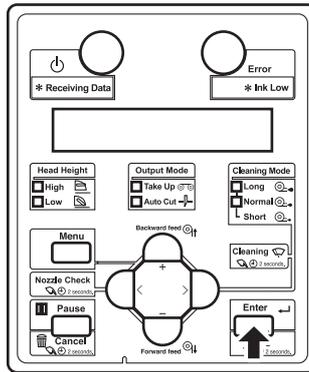

- The print head returns to its original position.
- “CR Maine.: Start” is displayed on the operation panel.

10. Press the [Menu] key on the operation panel.

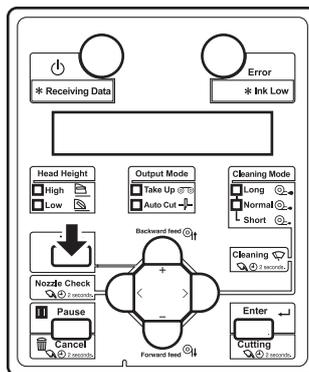

- The printer enters Normal.
- Cleaning around the print head is complete.

## 6.3 Disposal of waste fluids

The timing and method for the disposal of waste fluid are described below.

### (1) Disposal timing

Dispose of waste fluids in the following cases:

- a. When the waste fluid tank is more than half full.
- b. When “Waste Ink Tank Full” is displayed on the operation panel.

### (2) Disposal method

Follow the procedure below to dispose of waste fluid.



- **The waste fluid from the printer falls under the category of waste oil (waste ink) of industrial waste (out of the 19 items of general waste from business activities). You are obligated to properly dispose of waste fluid in compliance with Wastes Disposal and Public Cleansing Act and local ordinances. Delegate disposal to an industrial waste disposal contractor.**




- **Wear protective equipment (gloves, goggles or eye protection, protective mask, protective clothing) when handling ink. Be cautious that ink does not get into your eye or make a contact with your skin.**
- **When ink gets into your eye or make a contact with your skin, wash with water immediately.**
- **If left as it is, it may cause red eye or light inflammation. If it is necessary, please see your doctor immediately.**

1. Ready an empty container such as a supply waste fluid bottle, to contain the waste fluid.
2. Lay a protective material on the floor under the waste fluid tank.

3. Open the waste fluid valve, and transfer the waste fluid to the container.


**NOTE**

- When transferring the waste fluid to the empty container, the waste fluid may spatter. Make sure to put the container close to the waste fluid valve.

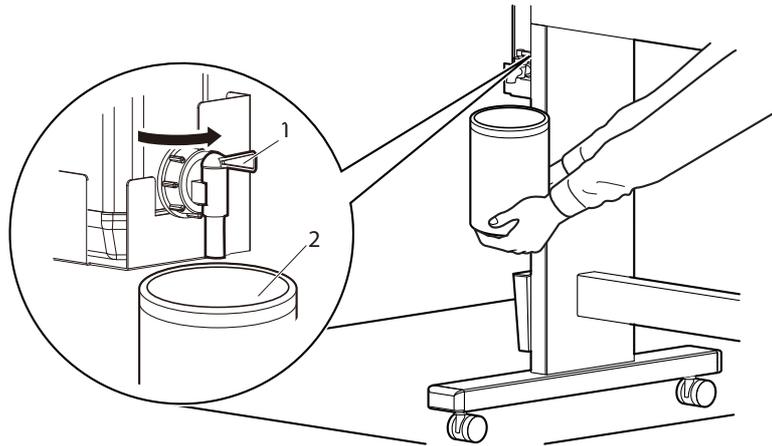

No.	Name
1	Waste fluid valve
2	Empty container

4. After pouring the waste fluid to the empty container, close the waste fluid valve securely.

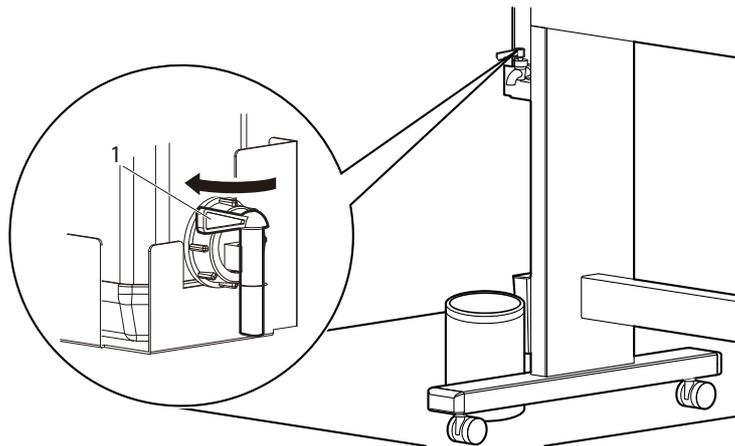

No.	Name
1	Waste fluid valve

5. Wipe the opening of the waste fluid valve with a cloth, etc.
6. Dispose of the waste fluid as an industrial waste product.
  - Disposal of waste fluids is completed.

## 6.4 Moving or transporting the printer

This section describes how to move or transport the printer.

### 6.4.1 Moving the printer

This section describes how to move the printer.




**CAUTION**

- **Move the printer maintaining a horizontal position.**
- **Do not slant the printer, prop it against a wall or turn it upside down.**  
There is a possibility that ink inside the printer may leak.  
Moreover, normal operation after shifting (to these positions) cannot be guaranteed.

#### (1) Preparation before moving

When using the dedicated stands, follow the procedure below to move the printer.

1. Dispose of waste fluid.  
☞ [6.3 Disposal of waste fluids](#)
2. Make sure that the printer is turned OFF.
3. Make sure that two wing bolts, securing the stand to the printer, and the hex socket bolts on the stand are not loose.
4. Make sure that the print head is located on the right edge.
5. Bundle the CR belts located in the center of the printer and clip them with the CR belt clip to fix them.

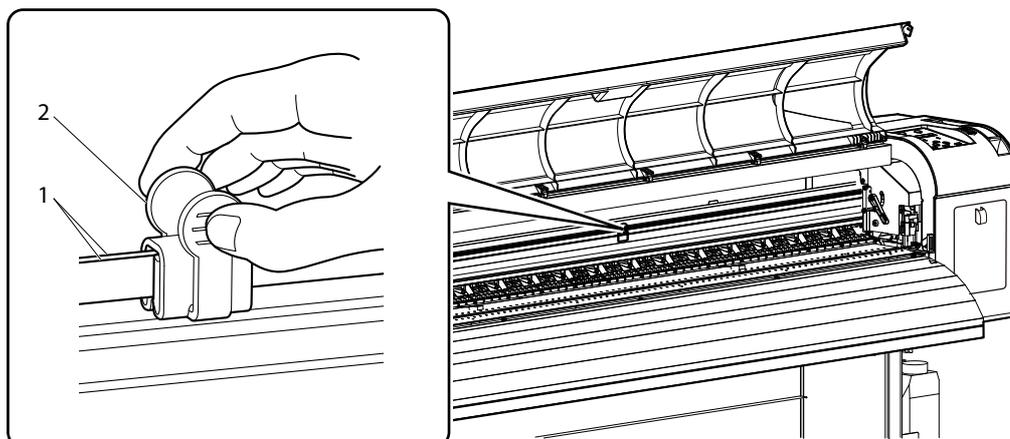


No.	Name
1	CR belts
2	CR belt clip

6. Remove the scroller.
7. Remove all the cables, such as the power cable.
8. Unlock the casters to move it.

**NOTE**

- The casters supplied with the dedicated stand are manufactured for little movement in flat indoor areas, not for transporting equipment. When moving the printer outdoors or where there are big bumps, remove the stands from the printer before moving.
- 📖 Installation manual

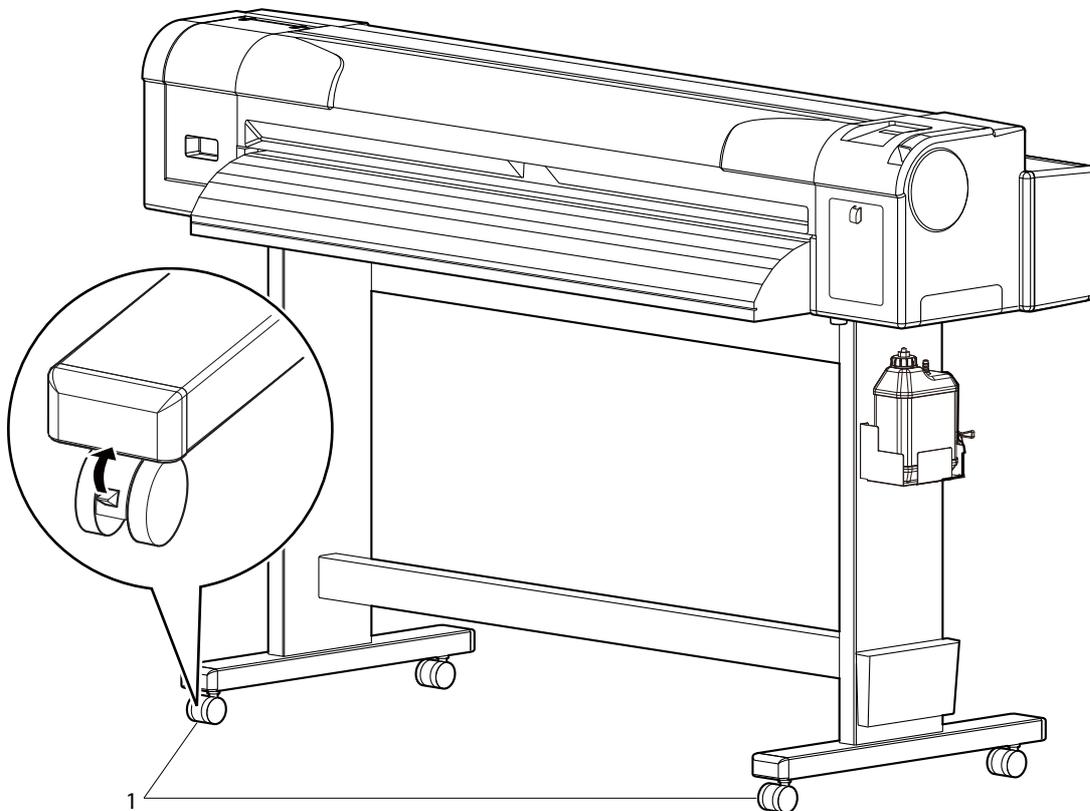

No.	Name
1	Casters

## (2) Reinstalling

After moving the printer, follow the procedure below to set it ready for use.

1. Select a suitable place for installation.  
☞ Installation manual
2. Move and install the printer to the location.
3. When using the stands, make sure that two wing bolts, securing the stand to the printer, and the hex socket bolts on the stand are not loose.
4. Attach cables, such as the power cable.  
☞ [3.1 Power cable connection](#)  
☞ [3.7 Connecting the printer to PC](#)
5. Perform Nozzle check, and then confirm that there is no clogging in the print head.  
☞ [3.5.1 Nozzle check](#)  
☞ [3.5.2 Nozzle check F](#)
6. Perform Alignment.  
☞ [3.6 Adjust Print](#)

### 6.4.2 Transporting the printer

When transporting the printer, make sure to pack it in the same condition as purchased, using protective and packing materials to protect the printer from vibration and shocks.

#### NOTE

- When transporting the printer, consult SIGNWarehouse Product Support or your authorized PrismJET dealer.
-

## 6.5 Long Storage and Initial Ink Charging


This section provides the cleaning procedure for long storage and initial ink charging steps next time when you use the printer.

### 6.5.1 Long-term storage

When you may not be able to run a weekly cleaning on the printer that is in sleep mode:


Perform "Longstore" and then power off the printer. It allows you to store the printer for up to one month (30 days).

1. Dispose of waste fluid.  
 🔗 [6.3 Disposal of waste fluids](#)
2. If the printer is turned ON, make sure the following.
  - Printing or other operations are not in progress.
  - The operation panel display is Normal.
3. Display the Longstore menu on the operation panel.
  - a. Press the [Menu] key on the operation panel.

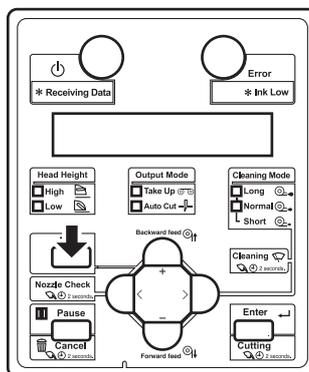


- "Menu1: Setup>" is displayed on the operation panel.
- The operation panel shifts to the Setup menu display.

- b. Press the [>] key on the operation panel.

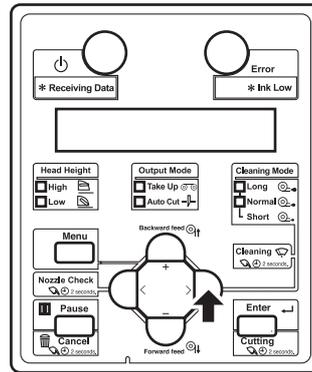


- “Set1: UserType” is displayed on the operation panel.

- c. Press the [+] key or [-] key to select “Set16: Longstore”.

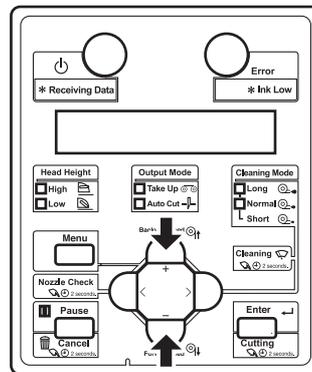


- d. Press the [Enter] key on the operation panel.

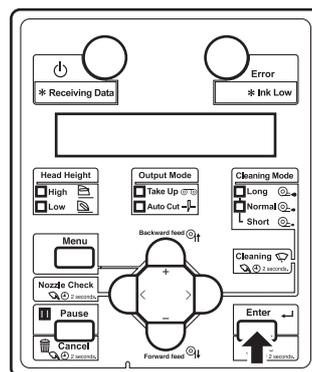


- “Longstore: Start” is displayed on the operation panel.
  - The display enters the Longstore menu.
-  [5.1.16 Longstore menu](#)

4. Press the [Enter] key on the operation panel.

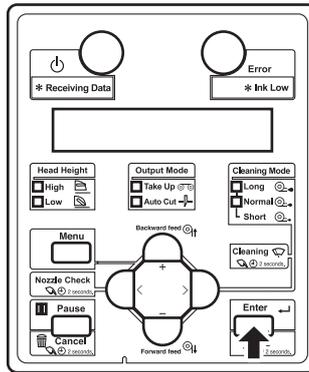

- “Remove Cartridges” is displayed on the operation panel.

5. Remove all ink cartridges or high capacity ink pack adapters from the slot.

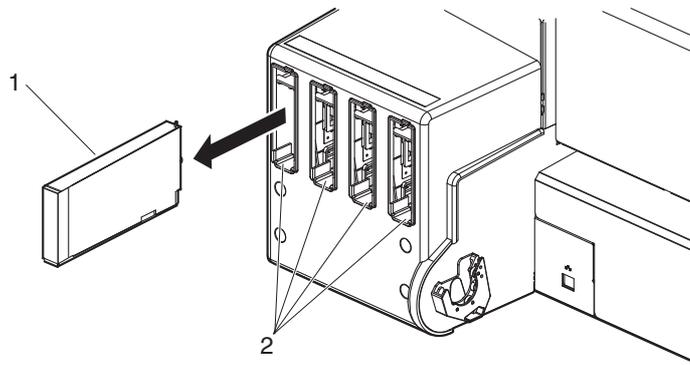


No.	Name
1	Ink cartridge
2	Ink cartridge slots

- “Discharging” is displayed on the operation panel and ink discharging begins.
- When the discharge is complete, “Insert CleaningCart.” is displayed on the operation panel.

## 6. Set the cleaning cartridges to all ink cartridge slots.


- Keep ▲ mark of the cleaning cartridge facing up and insert towards the printer side.
- Insert the cleaning cartridge all the way to the end of the slot.

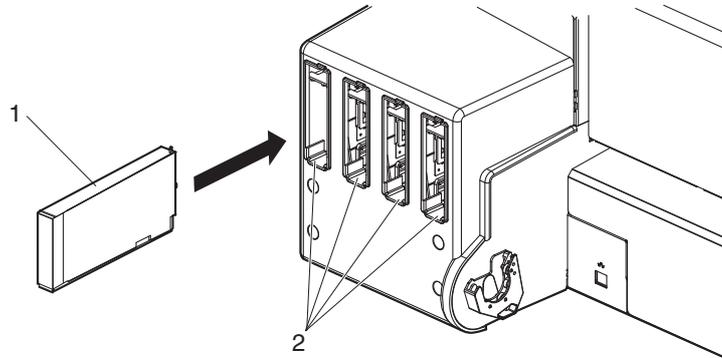

No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- When all cleaning cartridges are installed, “Busy-Washing” is displayed on the operation panel, and the printer starts charging the cleaning fluid.
- When the cleaning fluid has been charged, “Remove Cartridges” is displayed on the operation panel.

## 7. Remove all cleaning cartridges.

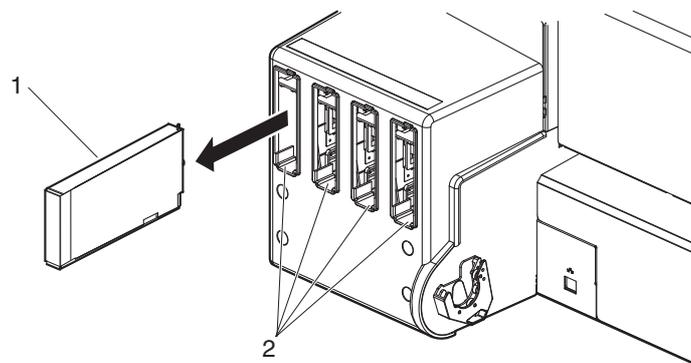

No.	Name
1	Cleaning cartridge
2	Ink cartridge slots

- “Busy-Washing” is displayed on the operation panel and the printer starts head cleaning.
- When head cleaning is complete, “[KCMY] Discharged” is displayed on the operation panel.


## 8. Press the [Power] key on the operation panel to turn OFF the printer.

- The Power lamp on the operation panel is turned off.


## 6.5.2 Performing initial charging after head cleaning

When powering on the printer after the long storage, follow these steps to perform initial ink charging.

1. Press the [Power] key on the operation panel to turn ON the printer.
  - Power lamp on the operation panel turns on (blue).

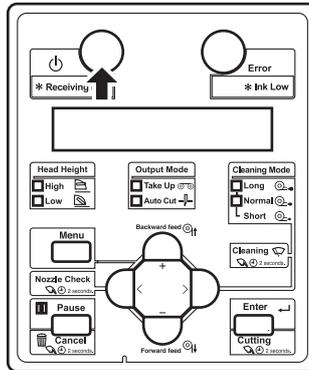


- The printer starts the initializing operation.
  - After the initial operation is complete, “Start Ink Charge –> E” is displayed on the operation panel.
2. Press the [Enter] key on the operation panel.

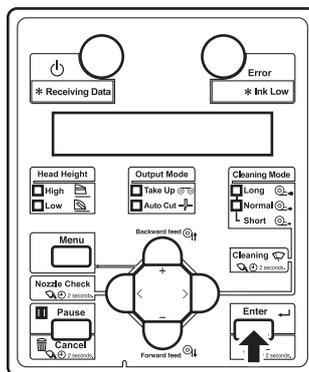

- “Insert InkCartridges” is displayed on the operation panel.
- When “Remove Cartridges” is displayed on the operation panel, remove all cartridges.

### 6.5.2.1 Installing 220 ml ink cartridges


1. Take out the new ink cartridge from the bag.
2. Agitate the ink cartridges.
  - Turn the ink plug upward and wait for 3 seconds.
  - Next, turn the ink plug downward and wait for 3 seconds.
  - Repeat that 10 times.

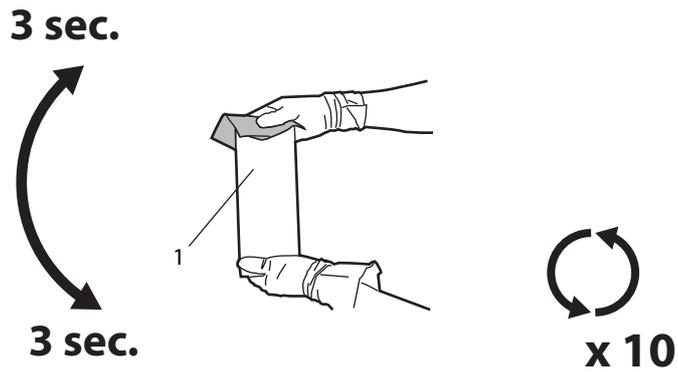

No.	Name
1	Ink cartridge

3. Insert the ink cartridges into Ink cartridge slots.

- Make sure that the ink cartridges are inserted into the correct slots.  
Match the mark in front of the slot and the color of the ink before inserting the ink cartridge.
- Keep ▲ mark of the ink cartridge facing up and insert towards the printer side.
- Insert the ink cartridge all the way to the end of the slot.

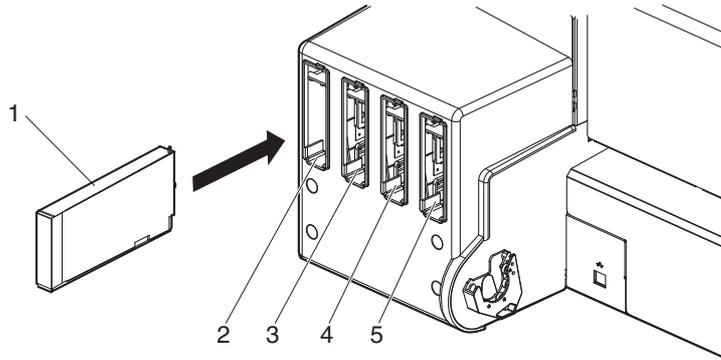

No.	Name
1	Ink cartridge
2	Ink cartridge slot K
3	Ink cartridge slot C
4	Ink cartridge slot M
5	Ink cartridge slot Y

- “Ink Refill \*\*%” is displayed on the operation panel and initial ink charge starts.
- Initial ink charge takes about four minutes.  
Ink charging operation and pause operation are repeated during the initial ink charge.
- When “100%” is displayed, the initial ink charge is complete.

**CAUTION**

- **Do not perform the following operations during ink charging. If charging is interrupted, ink will be lost when charging is resumed.**
  - **Do not turn OFF the printer.**
  - **Do not unplug the power cable.**
  - **Do not open the front cover.**
  - **Do not open the maintenance cover.**
  - **Do not raise the media loading lever.**

- After the initial ink charge is complete, “Media End” is displayed on the operation panel.

**NOTE**

- If the printer performs the nozzle check printing immediately after initial ink charge is complete, the following results may occur.
- Printed lines become blurred.
- The data is partially not printed.

In such cases, follow “**6.2.3 Head cleaning**” and perform “Little Charge”. Then, check the printing result.


If there is no improvement in the print result even after performing “Little Charge”, leave the printer unused for an hour or more. Then, perform “Little Charge” again and check the print result.

If there is still no improvement, contact SIGNWarehouse Product Support or your PrismJET dealer.

---

### 6.5.2.2 Installing high capacity pack adapters (option)

1. Take out the new ink bag from the bag.
2. Install the ink bag and smart chip card to high capacity pack adapter.
3. Agitate the ink bag.
  - To prevent the ink bag and the High capacity ink pack adapter from separating, hold one hand against the top of the ink bag. Rotate the plug of the ink bag vertically and hold for 3 seconds.
  - Then, invert the ink bag with the adapter and hold for 3 seconds.
  - Repeat that 10 times.

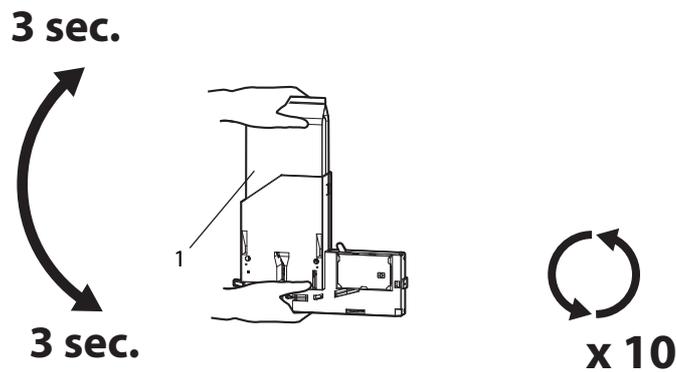


No.	Name
1	Ink bag

4. Insert the High capacity ink pack adapters into Ink cartridge slots.

**NOTE**

- Do not insert the high capacity pack adapter into the ink cartridge slot without a cleaning fluid bag attached.  
The information of the remaining amount will be overwritten and the cleaning fluid bag will not be usable.

- Insert the high capacity pack adapter all the way to the end of the slot.

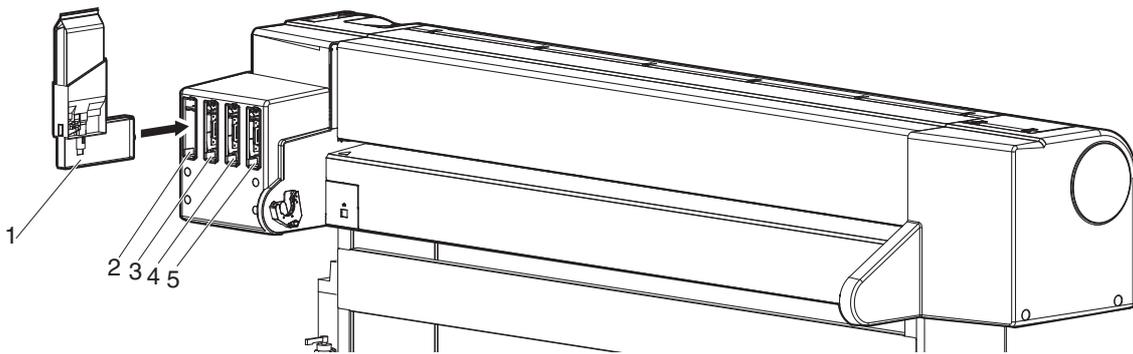

No.	Name
1	High capacity pack adapter
2	Ink cartridge slot K
3	Ink cartridge slot C
4	Ink cartridge slot M
5	Ink cartridge slot Y

- When a high capacity pack adapter is installed, “Ink Refill \*\*%” is displayed on the operation panel and ink charging starts.
- Initial charging takes about four minutes.  
Ink charging operation and pause operation are repeated during the ink charging.
- When “100%” is displayed, the ink charging is complete.

**CAUTION**

- **Do not perform the following operations during ink charging. If charging is interrupted, ink will be lost when charging is resumed.**
    - **Do not turn OFF the power of the printer.**
    - **Do not unplug the power cable of the printer.**
    - **Do not open the front cover.**
    - **Do not open the maintenance cover.**
    - **Do not raise the media loading lever.**
- 

- After the ink charging is complete, “Media End” is displayed on the operation panel.

**NOTE**

- If the printer perform the nozzle check printing immediately after initial ink charging is complete, the following results may occur.
- Printed lines become blurred.
- The data is partially not printed.

In such cases, follow “[6.2.3 Head cleaning](#)” and perform “Little Charge”. Then, check the printing result.

If there is no improvement in the print result even after performing “Little Charge”, leave the printer unused for an hour or more. Then, perform “Little Charge” again and check the print result.

If there is still no improvement, contact SIGNWarehouse Product Support or your PrismJET dealer.

---

## 7 Troubleshooting

This chapter describes possible troubles during the use of this product and countermeasures.

If the error not included in any items of this section occurs, contact SIGNWarehouse Product Support or your PrismJET dealer.

**NOTE**

- If you want to receive product warranty, prepare the warranty certificate.  
If the warranty certificate is not presented, the repair will not be covered by the warranty even if within the warranty period.  
If you have signed a maintenance service contract, prepare that or a similar document.
-

## 7.1 Malfunctions and failures

This section describes undisplayed malfunctions and failures of the printer, possible causes and countermeasures.

### 7.1.1 Problems in installation and introduction

#### (1) Cannot perform the initial ink charge

No.	Possible cause	Remedy	Reference
1	Is the front cover open or media loading lever raised?	Close the front cover, or lower the media loading lever.	 <a href="#">3.4 Loading media</a>
2	Is the maintenance cover open?	Close the maintenance cover.	 <a href="#">6.1.4 Replacing the cleaning wiper</a>  <a href="#">6.2.4 Cleaning the cleaning wiper</a>  <a href="#">6.2.5 Cleaning around the capping unit</a>  <a href="#">6.2.6 Cleaning around the print head</a>  <a href="#">6.2.7 Cleaning the color sensor</a>
3	Are all four color ink cartridges fully inserted?	Fully insert all four color ink cartridges.	 <a href="#">6.1.1 Replacing ink cartridges</a>

#### (2) Ink does not come out after initial ink charge

No.	Possible cause	Remedy	Reference
1	Is the ink cartridge cold and frozen?	Leave the ink bag at room temperature for at least three hours, and perform cleaning several times.	 <a href="#">6.2.3 Head cleaning</a>
2	Is the power turned OFF during initial ink charge?	Turn the power ON again and continue initial ink charge.	 <a href="#">3.3 Installing ink cartridges</a>
3	Occasionally, normal printing cannot be performed after initial ink charge.	Perform cleaning several times, and check it every time.	 <a href="#">6.2.3 Head cleaning</a>

## 7.1.2 Cannot print at all

### (1) Does not work at all after power activation

No.	Possible cause	Remedy	Reference
1	Is the power cable connected to the plug?	Connect the power cable.	 <a href="#">3.1 Power cable connection</a>
2	Does the AC power supply provide the specified voltage?	Connect the cable to another outlet.	 <a href="#">3.1 Power cable connection</a>
3	Is the front cover open or media loading lever raised?	Close the front cover. Lower the media loading lever.	 <a href="#">3.4 Loading media</a>
4	Is the maintenance cover open?	Close the maintenance cover.	 <a href="#">6.1.4 Replacing the cleaning wiper</a>  <a href="#">6.2.4 Cleaning the cleaning wiper</a>  <a href="#">6.2.5 Cleaning around the capping unit</a>  <a href="#">6.2.6 Cleaning around the print head</a>  <a href="#">6.2.7 Cleaning the color sensor</a>

### (2) Does not work after loading the media

No.	Possible cause	Remedy	Reference
1	Is the front cover open or media loading lever raised?	Close the front cover. Lower the media loading lever.	 <a href="#">3.4 Loading media</a>
2	Is the maintenance cover open?	Close the maintenance cover.	 <a href="#">6.1.4 Replacing the cleaning wiper</a>  <a href="#">6.2.4 Cleaning the cleaning wiper</a>  <a href="#">6.2.5 Cleaning around the capping unit</a>  <a href="#">6.2.6 Cleaning around the print head</a>  <a href="#">6.2.7 Cleaning the color sensor</a>
3	Is the media loaded at an angle?	Load the media straight.	 <a href="#">3.4 Loading media</a>
4	Is the ink cartridge inserted?	Insert the ink cartridge.	 <a href="#">3.3 Installing ink cartridges</a>

No.	Possible cause	Remedy	Reference
5	Is the printer being used in an environment other than the one specified, such as in direct sunlight?	Only use the printer in an environment that is specified for use.	☞ Installation manual

**(3) When data is sent from the computer, an error occurs at the printer and nothing is printed**

No.	Possible cause	Remedy	Reference
1	Is the type of printer selected correctly at the computer?	Check that the printer type settings on the computer side and printer side are the same.	☞ <a href="#">3.7 Connecting the printer to PC</a>
2	Are the interface requirements and command mode the same on the computer side and printer side?		

**(4) Cannot use the computer online using LAN**

No.	Possible cause	Remedy	Reference
1	Is the network interface cable connected correctly?	Confirm the types of the cross and straight cables, and connect the network interface cable correctly.	☞ <a href="#">3.7.3 Connecting a network interface cable</a>
2	Are the network settings configured correctly?	Configure the network settings correctly.	☞ <a href="#">5.1.19 IP Address menu</a> to <a href="#">5.1.21 Gateway menu</a>
3	Match the printer's network settings with the computer side environment.	Match this product's network settings with the computer side environment.	☞ <a href="#">3.7.1 System requirements</a>
4	Does the Power lamp on the operation panel turn on after sending printing data from the computer?	If the Power lamp does not turn on, contact the computer manufacturer.	—

**7.1.3 Media-related troubleshooting**

**(1) The media slips or is torn during initialization**

**NOTE**

- If the media is jammed or torn, remove it according to [7.3 The media is jammed](#).

No.	Possible cause	Remedy	Reference
1	Is the loading position of the media correct?	Set the media correctly.	☞ <a href="#">3.4 Loading media</a>
2	Is the scroller set correctly?	Set the scroller correctly.	☞ <a href="#">3.4.1 Loading roll media</a>

No.	Possible cause	Remedy	Reference
3	Are there any foreign materials such as paper attached to the pressurizing roller?	Clean the pressurizing roller.	 <a href="#">6.2.2 Cleaning the inside of the printer</a>
4	Is the printer being used in an environment other than the one specified, such as in direct sunlight?	Only use the printer in an environment that is specified for use.	 Installation manual
5	Are you using folded, torn or rolled media?	Replace the media.	 <a href="#">4.2.2 Cautions on handling media</a>
6	Does the media bend?	Set the Vacuum Fan menu.	 <a href="#">4.2.1 Media type</a>  <a href="#">5.1.1.1.8 Vacuum Fan menu</a>

## (2) The media is crumpled during initialization

### NOTE

- If the media is jammed or torn, remove it according to [7.3 The media is jammed](#).

No.	Possible cause	Remedy	Reference
1	Is the loading position of the media correct?	Set the media correctly.	 <a href="#">3.4 Loading media</a>
2	Is the media loaded at an angle?	Set the media straight.	 <a href="#">3.4 Loading media</a>
3	Are there any foreign materials such as paper attached to the pressurizing roller?	Clean the pressurizing roller.	 <a href="#">6.2.2 Cleaning the inside of the printer</a>
4	Is the printer used in an environment other than the one specified, such as near an air conditioner?	Only use the printer in an environment that is specified for use.	 Installation manual
5	Are you using folded, torn or rolled media?	Replace the media.	 <a href="#">4.2.2 Cautions on handling media</a>

## (3) The wrong media size is set during initialization

No.	Possible cause	Remedy	Reference
1	Is the media loaded at an angle?	Set the media straight.	 <a href="#">3.4 Loading media</a>
2	When the media is set, does it curl upward?	Straighten the media or set a new media.	 <a href="#">3.4 Loading media</a>
3	Is the printer used in an environment other than the one specified, such as near an air conditioner?	Only use the printer in an environment that is specified for use.	 Installation manual

No.	Possible cause	Remedy	Reference
4	Are you using media that has been printed on already?	Use a new media.	 <a href="#">4.2.1 Media type</a>

#### (4) Media jams frequently occur

No.	Possible cause	Remedy	Reference
1	Is the media used in an environment other than the one specified?	Use the media in a dedicated environment.	 <a href="#">4.2.2 Cautions on handling media</a>
2	Are you using the old media?	Replace it with new media.	 <a href="#">6.1.2 Replacing Roll Media</a>
3	Are you using the folded or wrinkled media?		
4	Does the media bend?	Set the Vacuum Fan menu.	 <a href="#">4.2.1 Media type</a>  <a href="#">5.1.1.1.8 Vacuum Fan menu</a>

#### (5) The media veers during printing

No.	Possible cause	Remedy	Reference
1	Is the loading position of the media correct?	Set the media correctly.	 <a href="#">3.4 Loading media</a>
2	Is the scroller set correctly?	Set the scroller correctly.	 <a href="#">3.4.1 Loading roll media</a>

### 7.1.4 Printing-related troubleshooting

#### (1) Printing is partially stained or incomplete

No.	Possible cause	Remedy	Reference
1	Does the media include moisture?	Replace it with new media.	 <a href="#">6.1.2 Replacing Roll Media</a>
2	Are you using the folded or wrinkled media?		
3	Does the media bend?	Set the Vacuum Fan menu.	 <a href="#">4.2.1 Media type</a>  <a href="#">5.1.1.1.8 Vacuum Fan menu</a>

#### (2) The printing position is incorrect (some parts of the media cannot be printed on)

No.	Possible cause	Remedy	Reference
1	Is the loading position of the media correct?	Set the media correctly.	 <a href="#">3.4 Loading media</a>

No.	Possible cause	Remedy	Reference
2	Did you set up the origin and print position?	Cancel or reset the settings of the origin and print position.	 <a href="#">5 Panel setup menu</a>

### (3) Printing is blurred

No.	Possible cause	Remedy	Reference
1	Is the media printed on the printing surface?	Confirm the printing surface of the media and set it correctly.	 <a href="#">3.4 Loading media</a>
2	Did you perform Alignment?	Perform Alignment.	 <a href="#">3.6 Adjust Print</a>
3	Did you perform Media feed adjustment?	Perform Media feed adjustment.	 <a href="#">4.2.6 Media feed adjustment</a>
4	Is the temperature setting of each heater appropriate?	Set the temperature appropriately.	 <a href="#">5.1.1.1.5 Pre-heater menu</a> to <a href="#">5.1.1.1.7 Dryer menu</a>
5	Is the head height set to High or Middle?	Return the head height to “Low”.	 <a href="#">4.2.5 Head height adjustment</a>

### (4) White or black lines appear on printed media

No.	Possible cause	Remedy	Reference
1	Is the scroller set correctly?	Set the scroller correctly.	 <a href="#">3.4.1 Loading roll media</a>
2	Is the nozzle in good condition?	Perform Head cleaning.	 <a href="#">6.2.3 Head cleaning</a>
3	Did you perform Alignment?	Perform Alignment.	 <a href="#">3.6 Adjust Print</a>
4	Did you perform Media feed adjustment?	Perform Media feed adjustment.	 <a href="#">4.2.6 Media feed adjustment</a>
5	Is the temperature setting of each heater appropriate?	Set the temperature appropriately.	 <a href="#">5.1.1.1.5 Pre-heater menu</a> to <a href="#">5.1.1.1.7 Dryer menu</a>
6	Is the head height set to High or Middle?	Return the head height to “Low”.	 <a href="#">4.2.5 Head height adjustment</a>

### (5) Printing lines are not straight

No.	Possible cause	Remedy	Reference
1	Is the ink cartridge within the validity period?	Use a new ink cartridge.	 <a href="#">6.1.1 Replacing ink cartridges</a>

No.	Possible cause	Remedy	Reference
2	Did you perform Alignment?	Perform Alignment.	 <a href="#">3.6 Adjust Print</a>
3	Did you perform Media feed adjustment?	Perform Media feed adjustment.	 <a href="#">4.2.6 Media feed adjustment</a>

**(6) Printing lines are duplicated or patchy**

No.	Possible cause	Remedy	Reference
1	Is the nozzle in good condition?	Perform Head cleaning.	 <a href="#">6.2.3 Head cleaning</a>
2	Is the head height set to High or Middle?	Return the head height to “Low”.	 <a href="#">4.2.5 Head height adjustment</a>

## 7.2 Error messages

This section describes messages displayed during normal printer operation or when errors occur, and solutions to the messages.

### 7.2.1 Status messages

When the product is operating correctly, each operation status is displayed on the operation panel as below.

No.	Display	Description	Reference
1	Ready to Print	Standby (Media is loaded).	—
2	Media End	Standby (Media is not loaded).	—
3	Receiving	Receiving data.	—
4	Analyzing data	Analyzing data.	—
5	Printing	Under printing.	—
6	PrintRestart -> Enter	Pausing printing. Press the [Enter] key.	—
7	Warming Up	Warming up the heater.	—
8	Warming Up Skip -> Enter	Received the print data while the heater is being heated. To start printing before the heater is warmed up, press the [Enter] key. Reference	 <a href="#">4.4.8 Start Printing during Warm up</a>
9	Cleaning **%	Cleaning the head. Please wait a while.	 <a href="#">6.2.3 Head cleaning</a>
10	Ink Refill **%	Charging the ink. Please wait a while.	 <a href="#">3.3 Installing ink cartridges</a>
11	During Washing	Washing the print head by the head washing operation. Please wait a while.	 <a href="#">3.3 Installing ink cartridges</a>
12	Moving Origin Pos.	The print head is moving to the original printing position in the Origin menu. Please wait a while.	 <a href="#">5.1.8 Origin menu</a>
13	Confirm Position ->E	The print head is moving to the original printing position in the Origin menu. Press the [Enter] key.	 <a href="#">5.1.8 Origin menu</a>
14	Head Cleaning	Cleaning Head. Wait for a moment.	 <a href="#">5.1.16 Longstore menu</a>
15	Remove Cartridges	Performs head cleaning. Remove cartridges.	 <a href="#">5.1.16 Longstore menu</a>
16	** Initialing **	Initializing the setting in the Initialization menu. Please wait a while.	 <a href="#">5.1.18 Initialization menu</a>

No.	Display	Description	Reference
17	Power Off	Turning the printer off. Please wait a while. Do not unplug the power cable till the operation panel is turned off.	 <a href="#">3.2.2 Turning the power OFF</a>
18	Insert CleaningCart.	Washing the head. Install the cleaning cartridge.	 <a href="#">3.3 Installing ink cartridges</a>
19	Insert InkCartridges	Charging the ink. Insert the ink cartridge.	 <a href="#">3.3 Installing ink cartridges</a>
20	User: Type ** OK?	Initializing the media. Please wait a while. (** represents the setup media type)	 <a href="#">3.4.4 Setting the User Type Setting</a>
21	Media Initial		
22	No Media	The media is not loaded. Load the media.	 <a href="#">3.4 Loading media</a>
23	Media Initial - Off	The printer is unable to display the "Roll Length Manage" menu because Media Initial is set to "Off".	 <a href="#">5.1.4 Media Initial menu</a>
24	Perform Adjust Print	The message appears on the operation panel every 30 days to prompt you to run an adjustment print. Press [Enter] key will clear the message. When the message disappears, print an adjust print pattern.	 <a href="#">3.6 Adjust Print</a>

## 7.2.2 Message type error display and remedies

Message type errors are displayed when certain failures occur during printer operation.

If a message type error occurs, the printer may display the following error messages on the operation panel and stop operation.

If the printer stops operating, solve the error so that the printer restarts.

No.	Display	Description	Remedy	Reference
1	Cover Open	Front cover is open.	Close the front cover.	 <a href="#">3.4 Loading media</a>
2	Maint. CoverL Open	Maintenance cover L is open.	Close Maintenance cover L.	 <a href="#">2.1 Names of parts and functions</a>
3	Maint. CoverR Open	Maintenance cover R is open.	Close Maintenance cover R.	 <a href="#">2.1 Names of parts and functions</a>
4	Lever Up	Media set lever is raised.	Lower Media set lever.	 <a href="#">2.1 Names of parts and functions</a>
5	Load Media	Media is not loaded.	Set the media.	 <a href="#">3.4 Loading media</a>
6	Undefined Media	Media detection has failed. (Stops operation)	Reload the media.	 <a href="#">3.4 Loading media</a>
7	Media Slant	Media is fed obliquely. (Stops operation)	Reload the media.	 <a href="#">3.4 Loading media</a>
8	Media Cut Error	The media was not cut. (Stops operation)	Reload the media.	 <a href="#">3.4 Loading media</a>
9	Outside Print Area	The printer is unable to print because there is not enough printable width on the media. Adjust printable width by changing CR origin and side margin (left and right side margin) settings.	Printable width needed varies depending on the types of test print. Adjust the above settings to secure enough width.  <a href="#">5.1.1.1.3 Adjust Print menu</a> (at least 550 mm)  <a href="#">5.1.1.1.4 Dist.Adj menu</a> (at least 400 mm)  <a href="#">5.9 Roll Length Manage menu</a> (at least 400 mm)	 <a href="#">5.1.3 Side Margin menu, 5.1.5 Media Width menu, 5.1.8 Origin menu</a>
10	Roll Length - Off	The printer is unable to print because the "Roll Length" setting is set to "Off".	Specify the "Roll Length" settings and then select Print or Simple Print.	 <a href="#">5.9.4 Roll Length menu</a>
11	Roll Remain Error	The remaining roll paper count has become 0. (Stops operation)	Load a new roll media.	 <a href="#">6.1.2 Replacing Roll Media</a>
12	Roll Near End: *m	The remaining roll paper count is almost 0. The remaining roll paper is *m.	Prepare a new roll media.	 <a href="#">6.1.2 Replacing Roll Media</a>

No.	Display	Description	Remedy	Reference
13	End Of Roll	Roll media has run out. (Stops operation)	Load a new roll media.	 <a href="#">6.1.2 Replacing Roll Media</a>
14	Change Head Gap Low	The head height on the printer does not match with the one specified on the print data.	Change the height of the printer head.	 <a href="#">4.2.5.1 When raising the print head, 4.2.5.2 When returning the print head to the original position</a>
15	Change Head Gap Mid			
16	Change Head Gap High			
17	[****] Ink Low	The remaining amount of ink is low. (Continues operation)	Replace with a new S/C card and ink cartridge.	 <a href="#">6.1.1 Replacing ink cartridges</a>
18	[****] Ink End	Ink has run out. (Stops operation)	Replace with a new S/C card and ink cartridge.	 <a href="#">6.1.1 Replacing ink cartridges</a>
19	[****] Check Ink	Printer cannot identify the ink cartridge or ink bag correctly.	Insert the ink cartridge or ink bag again.	 <a href="#">6.1.1 Replacing ink cartridges</a>
20	[****] S/C ReadErr	Reading Smart chip has been failed.	Insert Ink cartridges again. If Smart chip still cannot be read, insert new Ink cartridges.	 <a href="#">6.1.1 Replacing ink cartridges</a>
21	[***] S/C Recog. E	An ink cartridge that needs smartchip recovery may have been installed.	Remove the ink cartridge and reload it. If the printer is still unable to read it, install a new ink cartridge.	 <a href="#">7.4.1 When the message “[***] S/C Recog. E” appears</a>
22	[**] Check Color ->E	An ink cartridge that needs smartchip recovery may have been installed.	Check that the ink color of the cartridge inserted is correct. <ul style="list-style-type: none"> <li>• In case of wrong color insertion, load a correct ink color cartridge.</li> <li>• If color is correct, press the [Enter] key. The printer will perform smart chip recovery and will continue to print.</li> </ul>	 <a href="#">7.4.2 When the message “[**] Check Color -&gt;E” appears</a>
23	[****] S/C Col.Err	Ink cartridges are inserted in wrong slots.	Insert ink cartridges correctly again.	 <a href="#">6.1.1 Replacing ink cartridges</a>
24	[*] S/C Ink Err	The ink cannot be used for this printer.	Contact SIGNWarehouse Product Support or your PrismJET dealer.	 <a href="#">6.1.1 Replacing ink cartridges</a>
25	[*] S/C CodeErr	Inserted Ink cartridge is not a proper one.	Contact SIGNWarehouse Product Support or your PrismJET dealer.	—
26	[*] Broken Chip	Smart Chip has been broken.	Insert new Ink cartridges.	 <a href="#">6.1.1 Replacing ink cartridges</a>

No.	Display	Description	Remedy	Reference
27	Full WasteInkTank	The waste fluid tank is full. (Stops operation)	Dispose of waste fluid.	 <a href="#">6.3 Disposal of waste fluids</a>
28	Life Times [Pump]	The operational life of the pump motor has almost expired. (Continues operation)	Contact SIGNWarehouse Product Support or your PrismJET dealer.	—
29	Life Times [CR Motor]	The life CR motor is almost expired. (Continues operation)	Contact SIGNWarehouse Product Support or your PrismJET dealer.	—
30	Life Times [PF Motor]	The operational life of the PF motor has almost expired. (Continues operation)	Contact SIGNWarehouse Product Support or your PrismJET dealer.	—
31	[****] Change plug	Time for replacing Adapter's plug of High-capacity pack adapter (option).	Replace Adapter's plug.	 "3.2 Replacing Adapter's plug" of High-capacity pack adapter manual.

**NOTE**

- [\*\*\*\*] of the error display indicates the ink color that is subject to warning.

### 7.2.3 Error requiring restart

An error requiring restart is displayed if a fatal operational failure such as the following occurs.

- When an obstacle that prevents printing occurs
- When a problem occurs with the electrical circuit (PCB, motor, sensor, etc.) of the printer
- When a failure in the printer control program occurs

If an error requiring restart occurs, the printer stops operating after performing the following operations.

1. The drive power automatically shuts down.
2. All lamps on the operation panel blink, and the buzzer rings continuously.
3. The error message is displayed on the operation panel.

Pressing any key on the operation panel stops the beeping.

For an error requiring restart, operation will return to normal after removing the cause of the error and restarting the printer.

If the same error continues to be displayed, contact the SIGNWarehouse Product Support or your PrismJET dealer. Be sure to include the specific error code from the error message when you contact us.

No.	Display	Description	Remedy	Reference
1	E*** Error [ ]	A problem that does not have a remedy has occurred.	<ol style="list-style-type: none"> <li>1. Remove obstacles such as paper scraps in the drive system.</li> <li>2. Confirm that the replaced items are correctly attached.</li> <li>3. Turn OFF the printer power, and turn it ON again after 10 seconds or longer.</li> </ol>	<p> <a href="#">7.3 The media is jammed</a></p> <p> <a href="#">6.1 Replacing consumable components</a></p>


**NOTE**

- “\*\*\*” in the error message is the code no. that indicates what type of error occurred.
- The command code representing the error occurred may be indicated in [ ].
- For the settings on your PC side, refer to the Operating Manual attached with your PC.

## 7.3 The media is jammed

When the set media is jammed, follow the procedure below to remove it.

1. Turn OFF the power of the printer.  
[☞ 3.2.2 Turning the power OFF](#)
2. Open the front cover.

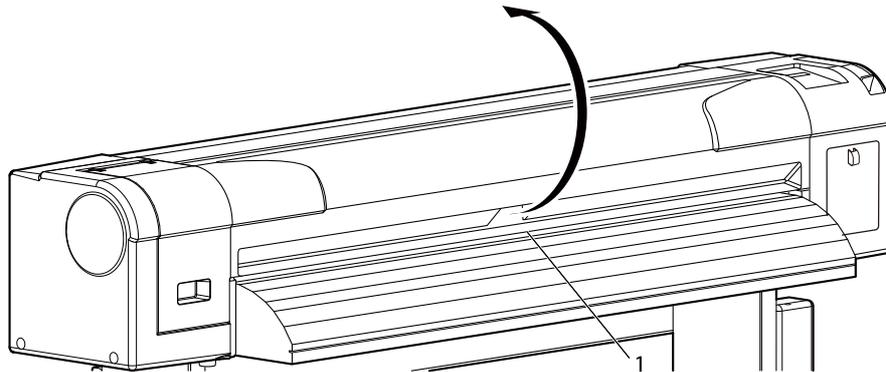

No.	Name
1	Front cover


3. Move the print head section from the top of the media to the right.

### NOTE

- When the head height is set to Low or Middle, switch it to High before moving the Head. Change the setting back to Low or Middle after moving the Head.


[☞ 4.2.5.1 When raising the print head](#)

[☞ 4.2.5.2 When returning the print head to the original position](#)

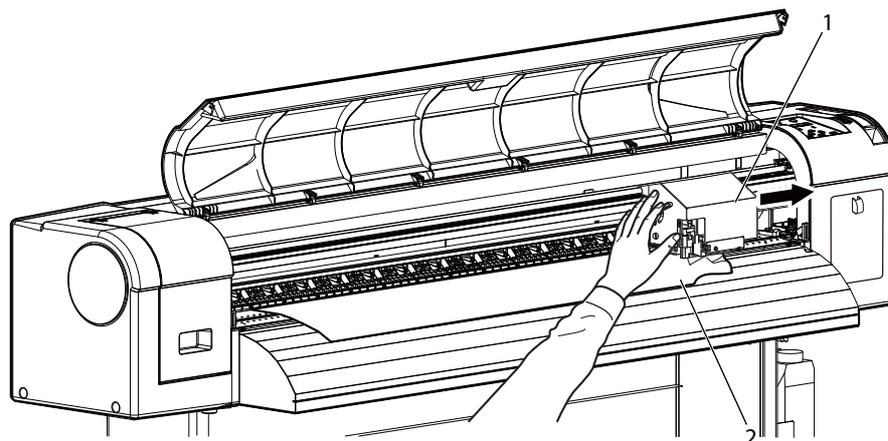


No.	Name
1	Print head section
2	Roll media

4. Raise the media loading lever.

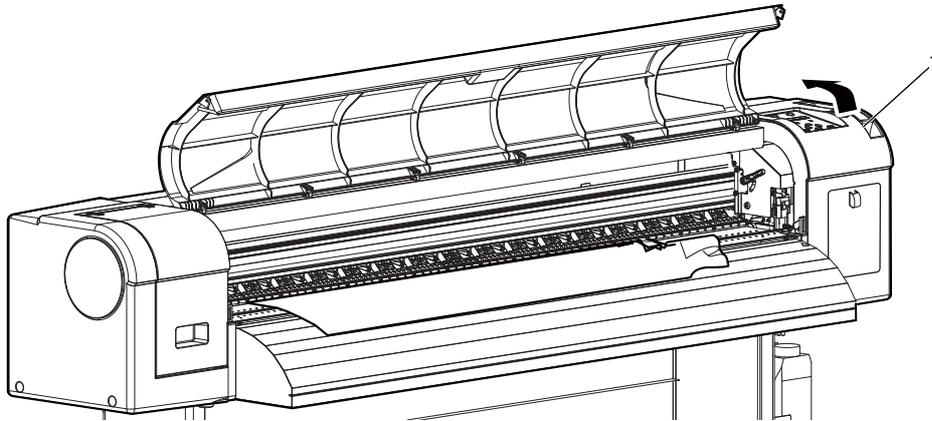


No.	Name
1	Media loading lever

5. Pull the media to your side, and cut the torn part with cutting tools such as a razor blade.

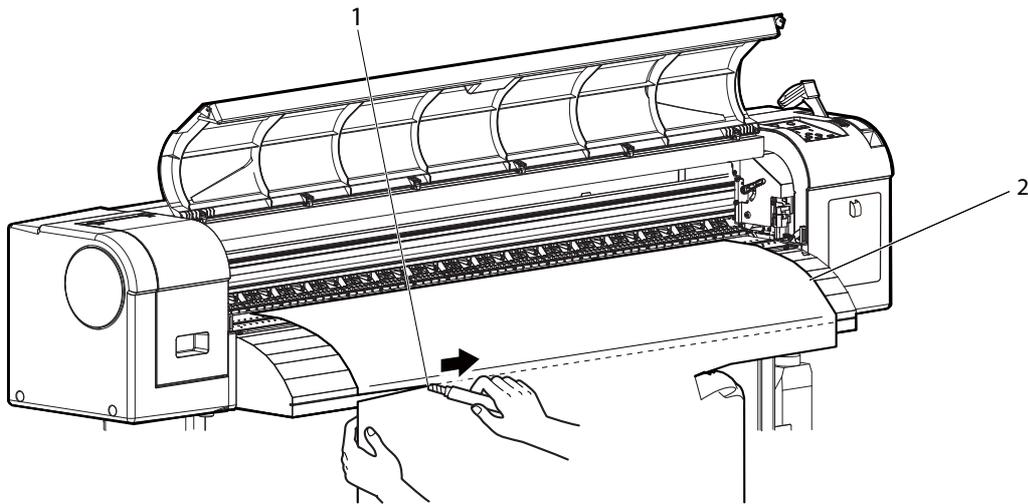

No.	Name
1	Razor blade
2	Roll media

6. Hold the both edges of the scroller to rewind the roll media by hands.

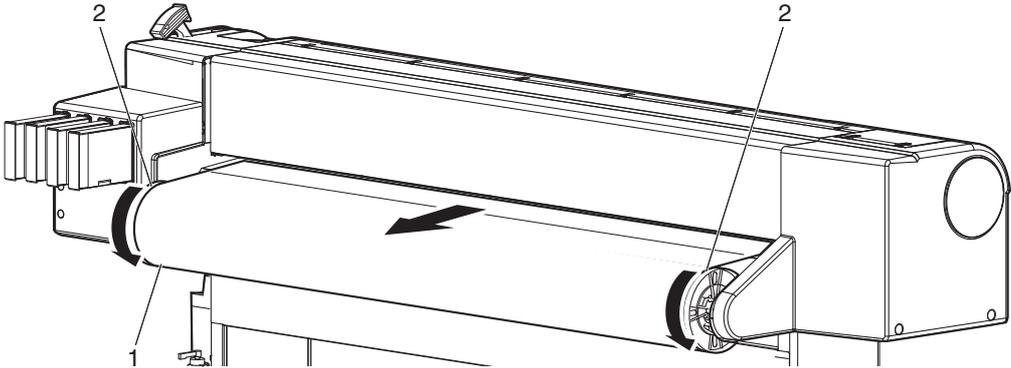

No.	Name
1	Roll media
2	Scroller

7. If paper dust or pieces of paper remain inside the printer, remove them.

## 7.4 Smartchip Recovery

When the following message is prompted on the operation panel, a smartchip error such as broken chip may have occurred in the ink cartridge.

- [\*\*\*] S/C Recog. E
- [\*\*] Check Color ->E

Check that the correct color is inserted in the cartridge slot and perform smartchip recovery. This will allow you to continue to print.

To perform smartchip recovery, do one of the followings according to the message appeared.

### 7.4.1 When the message “[\*\*\*] S/C Recog. E” appears

Remove the ink cartridge and reload it. If the printer is still unable to read it, install a new ink cartridge.

- If a message “[\*\*] Check Color ->E” appears after the ink cartridge is reloaded, follow the section ["7.4.2 When the message “\[\\*\\*\] Check Color ->E” appears"](#) to operate.

### 7.4.2 When the message “[\*\*] Check Color ->E” appears

Check that the ink color of the cartridge inserted is correct.

- In case of wrong color insertion, load a correct ink color cartridge.
- If color is correct, press the [Enter] key. The printer will perform smart chip recovery and will continue to print.

#### NOTE

- During smartchip recovery execution, the ink cartridge being recovered blinks in the ink level indicator and ink status menu.

 [2.1.4.1 Estimated Ink level graphic](#), [5.9.4 Roll Length menu](#)

## 8 Appendix

This chapter describes specifications and included components with this printer.

## 8.1 Product specifications

### 8.1.1 Printer specifications

Items		Specification
Model name		PrismJET 54 Gen2
Printing method		On-demand piezo drive system
Drive system		Firmware servo/DC motor drive
Media feed system		Multipoint pressurizing grid roller system
Media fixing system		Pressurization roller down system by manual lever
Media feed/ejection	Roll media	Rear feed/Front ejection
Roll media outer diameter		150 mm or less
Roll media weight		19 kg or less
Maximum media width		1,371 mm
Minimum media width		500 mm
Maximum media thickness		0.3 mm (when the head height is Low) / 0.8 mm (when the head height is Middle) / 1.3 mm (when the head height is High)
Maximum printable media width		1,361 mm
Print margin	Roll media	Front: 5 mm <sup>*1,2</sup> , Back: 5 mm (40 mm at the roll media end), Left: 5 to 25 mm, Right: 5 to 25 mm *1 15 mm (Immediately after media initialization, or when feeding the media backward) *2 40 mm (When Media Initial menu is set to "Top&Width", or after cutting the media)
Media cut system		Horizontal automatic cut system/manual cut system
Head height adjustment		Three adjustable positions of Low/Middle/High
CPU		64-bit RISC CPU
Memory		256MB
Command		MH-RTL (RTL-PASS)
Interface		Network interface (Ethernet IEEE 802.3)
Ink	Supply system	Supplied through tubes from four-color independent cartridges
	Cartridges	Black, Cyan, Magenta, Yellow: 220 ml ± 5 ml each (1,000 ml ± 5 ml when the optional high capacity pack adapter is used)

Items		Specification
Environmental condition	Operating condition	Temperatures: 20 °C to 32 °C Humidity: 40% to 60%, No condensation
	Printing accuracy coverage	Temperatures: 22 °C to 30 °C Humidity: 40% to 60%, No condensation
	Change rate	Temperature: within 2°C per hour Humidity: within 5 % per hour
	Archiving condition (Ink not charged)	Temperature: -20 °C to 60 °C Humidity: 20 % to 80 %, No condensation Storage life: six months
	Archiving condition (Ink charged)	Temperature: -10 °C to 40 °C Humidity: 20 % to 80 %, No condensation Storage life: within 1 week* *In case stored in the temperature over 32 °C, the storage period should be within 4 days.
Power	Power voltage	AC 90 V to AC 132 V / AC 198 V to AC 264 V
	Frequency	50 Hz/60 Hz ± 1 Hz
Power consumption	Printing	1560 W or less
	Standby	(Heater: ON) 1500 W or less (Heater: OFF) 125 W or less
Outer diameter	Height	1,218 mm (including the stands)
	Width	1,916 mm
	Depth	685 mm
Weight	Printer	approx. 66 kg
	Stands	approx. 20 kg

## 8.2 Interface specification

This section describes each type of interface specifications supported by this product.

### 8.2.1 Network interface specification

Items	Specification
Network type	Ethernet IEEE802.3
Network I/F	10BASE-T/100BASE-TX Automatic transfer type (RJ-45 Connector twist pair cable) MDI/MDI-X Automatic transfer
Corresponding protocol	TCP/IP

## 8.3 Options/Supply list

For more information about approved printer accessories, media, and other supplies, contact SIGNWarehouse or your authorized PrismJET dealer.

## 8.4 How to Get Help

### For Product Support

To contact SIGNWarehouse Product Support, please visit [www/signwarehouse.com](http://www.signwarehouse.com).

Login to your online account and submit a support ticket via the portal at <https://signwarehouse.com/pages/contact-us>.

Please leave your daytime contact information (phone number and email address) and a detailed description of the problem.

### For Consumables

To Purchase approved PrismJET supplies and accessories, please visit [www.signwarehouse.com](http://www.signwarehouse.com), or contact the SIGNWarehouse call center during regular business hours

Phone: 903-462-7700

email: [sales@signwarehouse.com](mailto:sales@signwarehouse.com)



PRISM **JET54**